


CURRENT PRODUCTS model:CSP155/R

PROGRAM METER

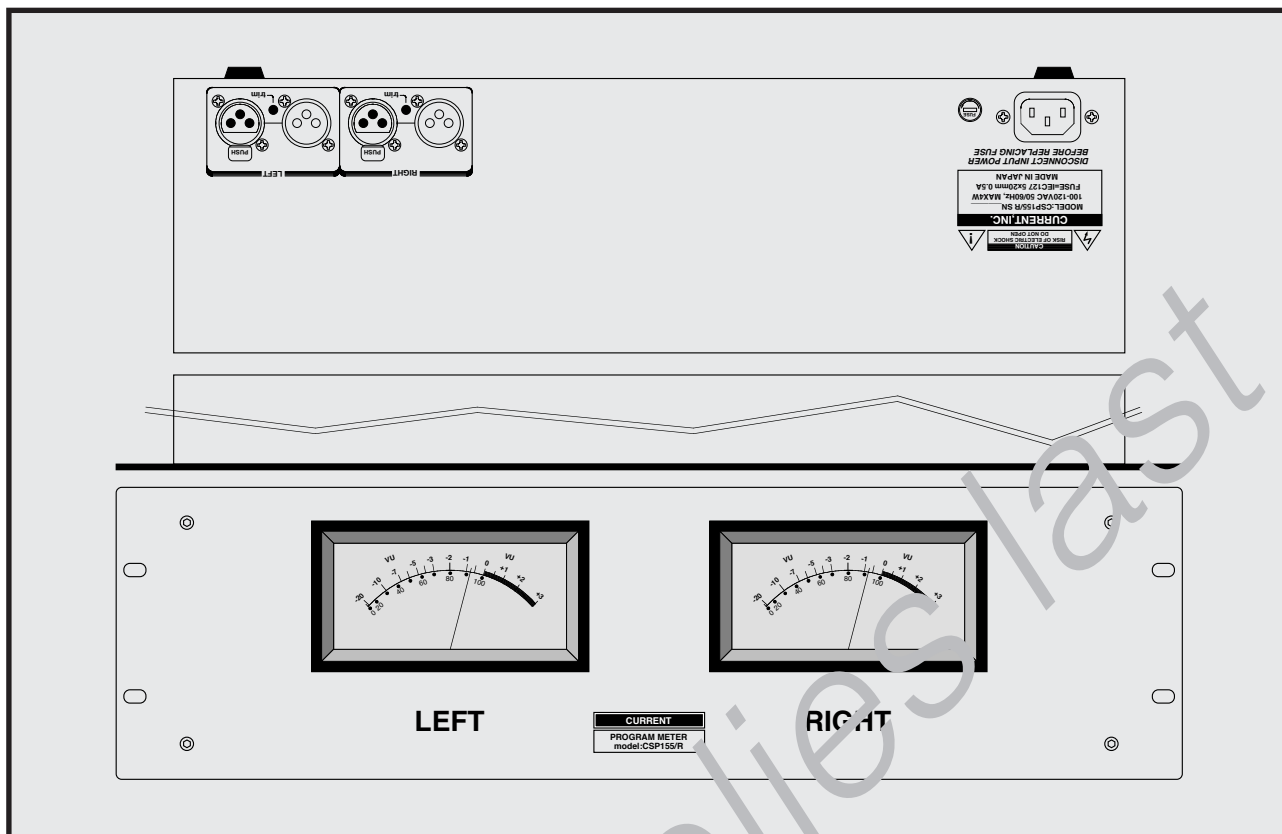

Supersized VU meter
Balance XLR input
-20 to +6dBu trim
The through output
Maintenance-free illumination
19 inches 3U size

CSP155/R is supersized program meter of stereo specifications. It is implementing sifam made to VU meter unit, and, as for this component, the adoption results with large size console are a lot of and highly precise. Additionally, it is beautiful and maintenance-free bulb-colored LED is mounted for lighting of each meter.

"Audio input and output"

Audio input and output of CSP155/R is balanced XLR type connector, and reference level is +4dBu. Through output connector is directly connected to with input connector and can input from either. Additionally, it can change to 600 Ω with internal DIP switch.

"Trim"

Reference level of VU meter is trim located beside each input connector of rear panel, and adjustment is possible to -20dBu to +6dBu. In addition, standard reference level is +4dBu.

"Others"

It is possible for reference level and panel name to customize, and, in that case, plate-making charges are necessary extra. Additionally, CSP155R is available for rack mount type model.






SPECIFICATIONS

- 🍏 **INPUTS:** BALANCED, 30k Ω , 600 Ω
- 🍏 **INPUT CONNECTOR:** XLR3-F
- 🍏 **THRU CONNECTOR:** XLR3-M
- 🍏 **FREQUENCY RESPONSE:** 20~20kHz ± 0.5 dB
- 🍏 **ADJUST:** METER 0VU ADJUST -20dBu to +6dBu
- 🍏 **METER LAMP:** AMBER LED
- 🍏 **MAINS:** 100VAC 50/60Hz, MAX=4W
- 🍏 **CSP155R DIMENSIONS:** 482Wx132Hx153D, 5kg
- 🍏 **CSP155 DIMENSIONS:** 438Wx132Hx153D, 5kg

Rack mount	CSP155R	¥320,000
Desktop	CSP155	¥320,000
Custom print		¥72,000

accessory : AC cable

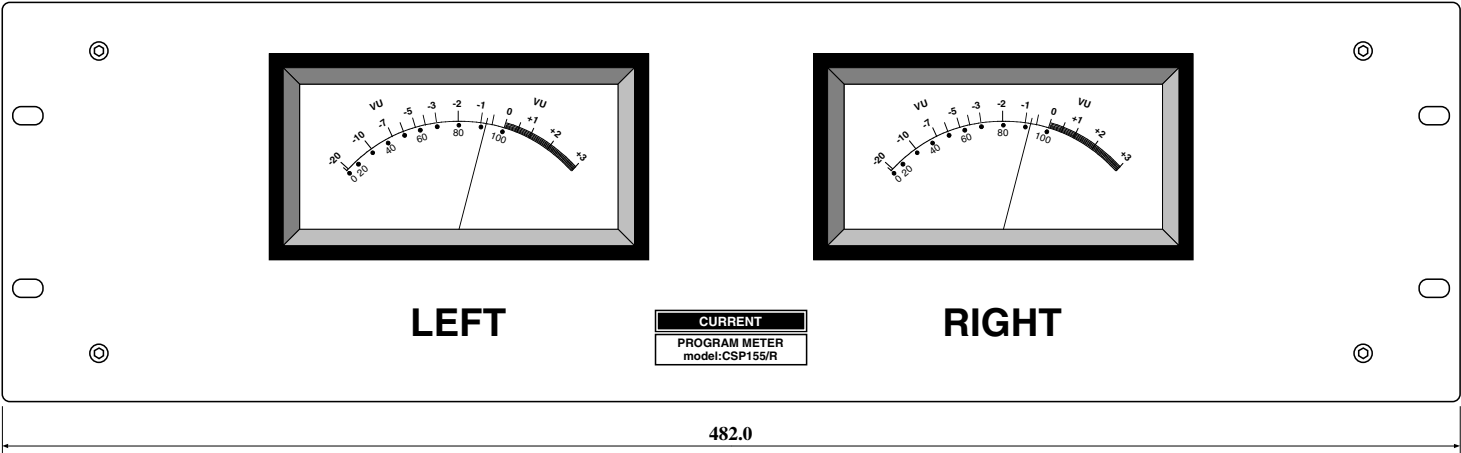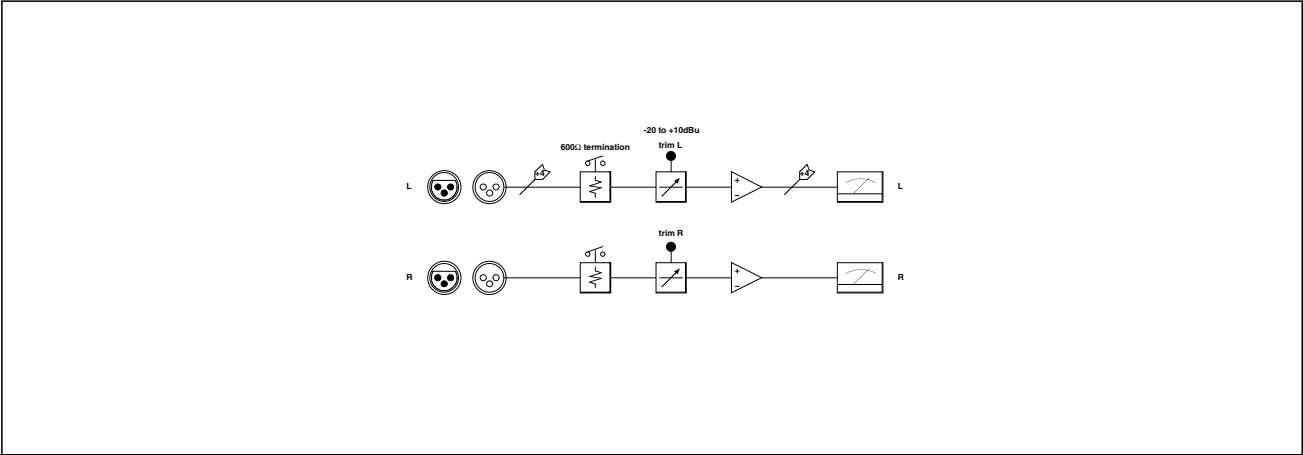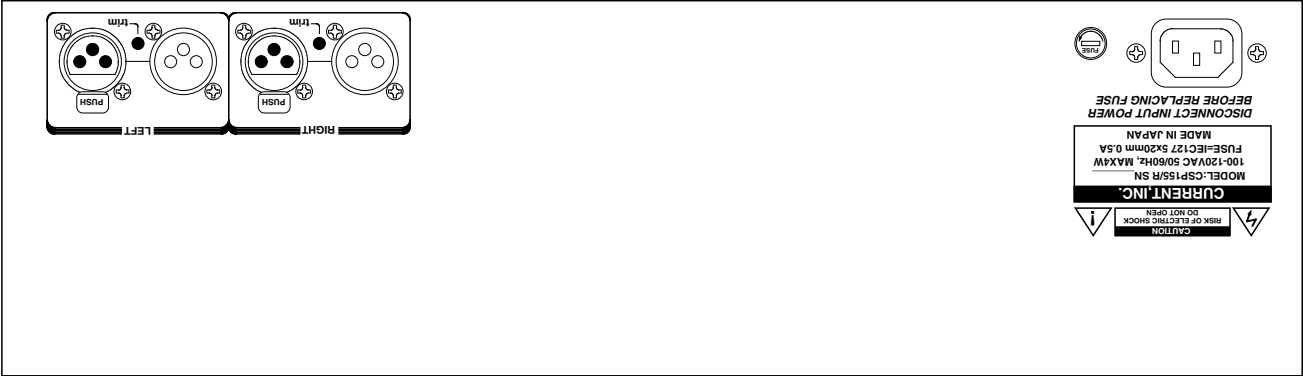

CURRENT, INC.	PROGRAM METER CSP155R	Nov.2010
HLCHHASHI	PANEL DIAGRAM	mar.98
		CSP155R-D