


CURRENT PRODUCTS model:AF207

RELAY I/F for AF201

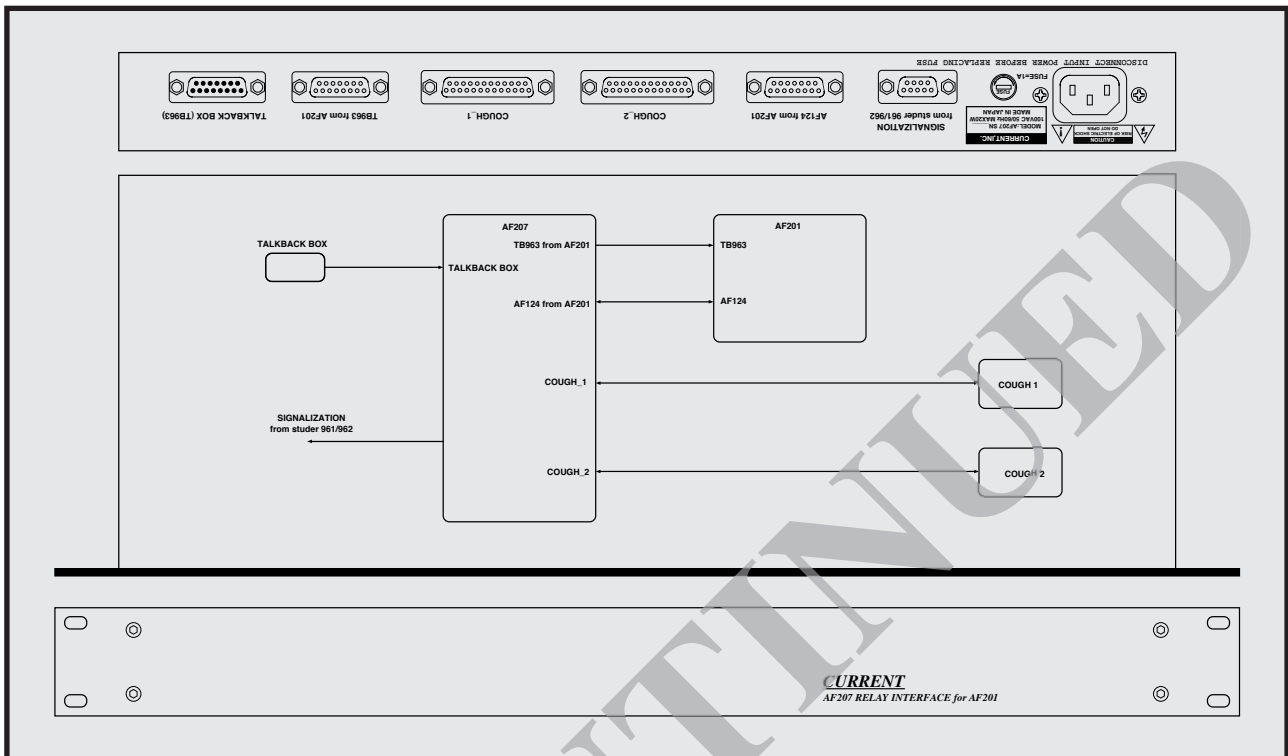

- スタジオインターフェースAF201対応
- シグマ社製SS4133を2台接続可能
- 2系統のCUEが可能
- イージーインストール
- STUDER961/2/3対応
- 19インチ1Uサイズ

◆その他

AF201のCUE、TBスイッチのリレー接点インターフェースとして使用することも出来ます。また、AF201Aでも使用可能です。

AF207はスタジオインターフェースAF201の標準カフボックスのAF124の代わりにシグマ社製SS4133を接続するためのインターフェースユニットです。STUDER961/2/3コンソールと接続するためのインターフェースも備えています。AF201システムのカフ、CUE、RTBなどのコマンドがリレー接点化されますのであらゆる機器と容易に接続出来ます。

◆SS4133との接続

AF207には2台のSS4133を接続することが出来ます。コネクタピンアサインを合わせてありますので、容易に接続することが出来ます。また、SS4133のモニターはモノですが、他の機種でも応用できるようにコネクタにはステレオで出力されています。

◆CUE

トークバックボックスTB963等を接続した場合に2系統のCUEを出力できます。SS4133を2台接続した場合には各々に独立したCUEを出すことができます。

◆RTB

SS4133のバックトークスイッチを押したときにはAF201を制御するとともに、コンソール制御用のリレー接点が出力されます。



SPECIFICATIONS

- TB963コネクタ：D15-F (#4-40)
- TB963 (AF201) コネクタ：D15-M (#4-40)
- AF124 (AF201) コネクタ：D15-M (#4-40)
- コンソールI/Fコネクタ：D9-M (#4-40)
- カフボックス1コネクタ：D25-M (#4-40)
- カフボックス2コネクタ：D25-M (#4-40)
- 電源：100VAC 50/60Hz、10W
- 外形寸法：482W x 44H x 303D 4kg

御注文型番:AF207
標準価格:¥198,000(税別)
付属品:ACケーブル、AF201リンクケーブル50cm

CURRENT,INC. 2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN
株式会社カレント 〒156-0044 東京都世田谷区赤堤2-26-11 TEL:81-3-3321-9559 FAX:81-3-5376-2735

The specifications are subject to change without notice. 記載内容は予告なく変更することがありますのであらかじめご了承ください。

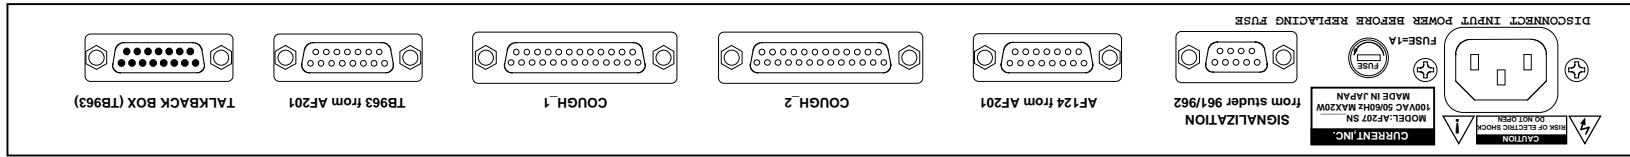

(c)CURRENT,INC.	AF207 RELAY INTERFACE for AF201	Sep.1997
H.ICHIHASHI	PANEL DIAGRAM	AF207-D

AF207 "COUGH 1/2" D25-F/M(#4-40) Connector Pin List

Ribbon	Hard	Signal name	Designation	Active
1	1	GND	GND	
2	14	NC	NO CONNECTION	
3	2	NC	NO CONNECTION	
4	15	BACK TALK +	BACK TALK INPUT +	
5	3	BACK TALK -	BACK TALK INPUT -	
6	16	COUGH COM	COUGH CONTACT COMMON	
7	4	NC	NO CONNECTION	
8	17	COUGH TLY M	COUGH CONTACT MAKE on COUGH ON	
9	5	BT TLY COM	BACK_TALK TALLY CONTACT COMMON	
10	18	NC	NO CONNECTION	
11	6	BT TLY M	BACK_TALK CONTACT MAKE on BT ON	
12	19	TLY 0V	TALLY INPUT COMMON	
13	7	CUE TLY	CUE TALLY	
14	20	STBY TLY	STUND-BY TALLY	
15	8	ONAIR TLY	ON_AIR TALLY	
16	21	MON L+	MONITOR OUTPUT L+	
17	9	MON L-	MONITOR OUTPUT L-	
18	22	MON R +	MONITOR OUTPUT R+	
19	10	MON R-	MONITOR OUTPUT R-	
20	23	NC	NO CONNECTION	
21	11	GND	GND	
22	24	NC	NO CONNECTION	
23	12	NC	NO CONNECTION	
24	25	NC	NO CONNECTION	
25	13	NC	NO CONNECTION	

注意！ Dサブコネクタの接続はHARDピン番号で接続してください。

取付ビスは#4-40インチビスを使用して下さい

CAUTION! D-Connector for wiring refer toHard pin number Description.

Mounting screw for D-connector use #4-40 size.

AF207 Connector Pin List

"TALKBACK BOX" D15-F(#4-40)				
Ribbon	Hard	Signal name	Designation	Active
1	1			
2	9			
3	2	LP COM	LAMPS COMMON +15V	+15V
4	10	SW COM	SWITCH COMMON 0V	0V
5	3	TB SW	TB SWITCH	0V
6	11			
7	4	CUE SW 2	CUE SWITCH 1	0V
8	12			
9	5	CUE SW 1	CUE SWITCH 1	0V
10	13			
11	6			
12	14			
13	7	+4.5V	+4.5V MIC POWER	+4.5V
14	15	TB MIC	TALKBACK MIC SIGNAL	
15	8	GND	MIC GND	0V

TBマイク信号には必ず2芯シールド線を使用してください。

"SIGNALIZATION" D9-M(#4-40)				
Ribbon	Hard	Signal name	Designation	Active
1	1	-6V	-6VDC FROM 961/2	
2	6	S-CALL	CALL SWITCH (CUE)	
3	2	S-READY	READY SWITCH (STND-BY)	
4	7	S-STUDIO_ON	STUDIO_ON SWITCH (ON_AIR)	
5	3	0V-L	0V LOGIC	
6	8	S-TB SIGN	BACK_TALK TALLY to 961/2	
7	4	+5V SUPPLY	+5VDC SUPPLY	
8	9	+5V COMMON	+5VDC SUPPLY COMMON (0V)	
9	5			

取付ビスは#4-40インチビスを使用して下さい

CAUTION! D-Connector for wiring refer to Hard pin number Description.