


CURRENT PRODUCTS model:CSP166

MONITOR UNIT

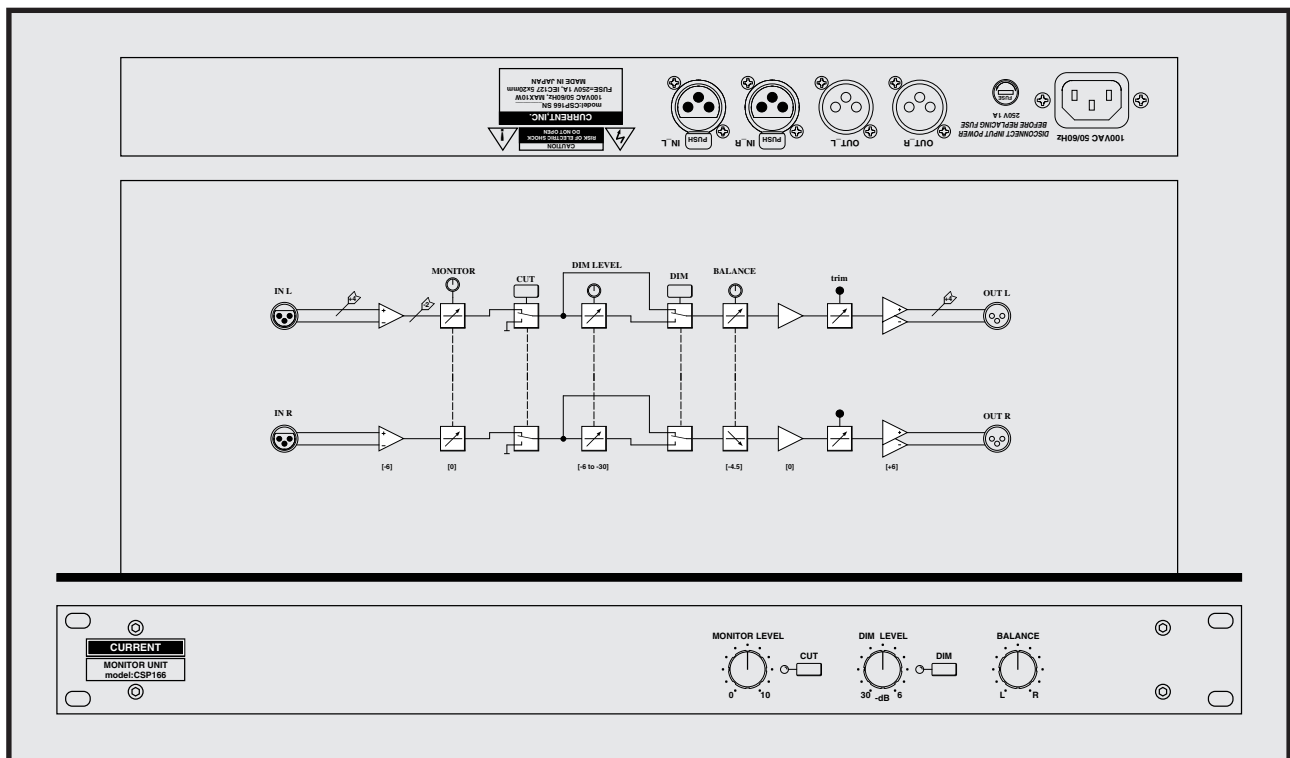

Simple monitor unit
 Monitor cut
 Variable DIM level
 Balance
 XLR input and output
 19 inches 1U size

CSP166 is monitor unit of simple configuration, and input and output is balance specifications of XLR connector. It is equipment which is convenient in cases when variable just wants to do level before power amp. In compact 19 inches 1U size, implementation in system rack is easy.

"Front panel"

With front panel, there are monitor level, monitor cut switch, DIM level, DIM switch, control of balance. It is possible for continuous variables to level DIM to -6dB to -30dB.



"Others"

When you require multifunctional monitor unit, please consider in CSP347, CSP349, MP463.

SPECIFICATIONS

- 🍏 **INPUTS:** STEREO, BALANCED, 12k Ω
- 🍏 **INPUT REFERENCE LEVEL:** +4dBu, max +24dBu
- 🍏 **INPUTS CONNECTOR:** XLR3-F
- 🍏 **OUTPUTS:** STEREO 50 Ω BALANCED
- 🍏 **OUTPUT REFERENCE LEVEL:** +4dBu, max +24dBu
- 🍏 **OUTPUTS CONNECTOR:** XLR3-M
- 🍏 **FREQUENCY RESPONSE:** 20~20kHz \pm 0.1dB
- 🍏 **THD:** < 0.01% at 1kHz, REFERENCE LEVEL
- 🍏 **NOISE LEVEL:** < -90dBu
- 🍏 **MAINS:** 100VAC 50/60Hz, MAX 15W
- 🍏 **DIMENSIONS:** 482Wx44Hx303D, 4kg

Monitor unit	CSP166	¥248,000
accessory : AC cable		

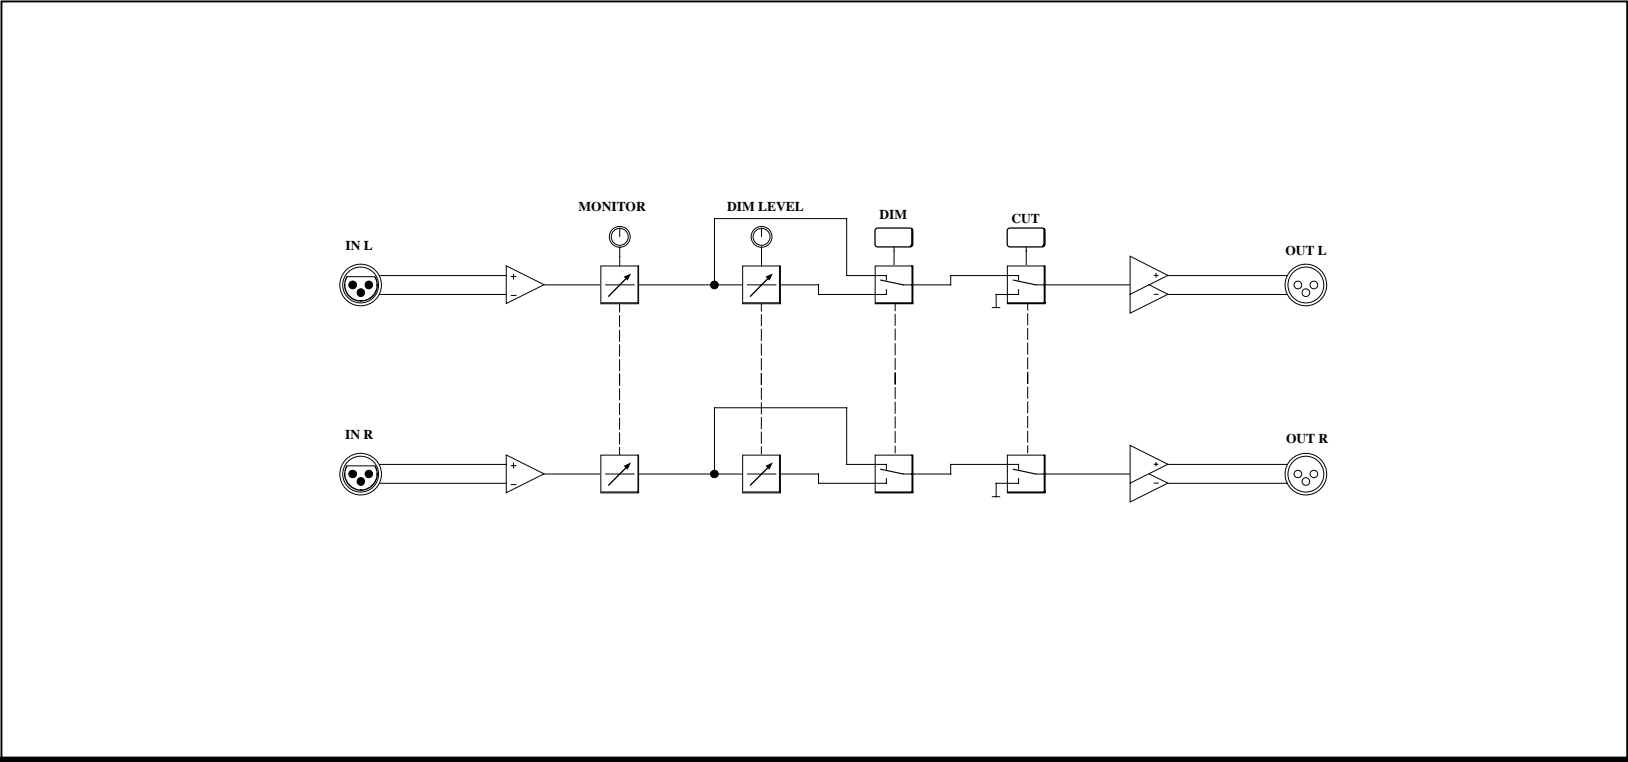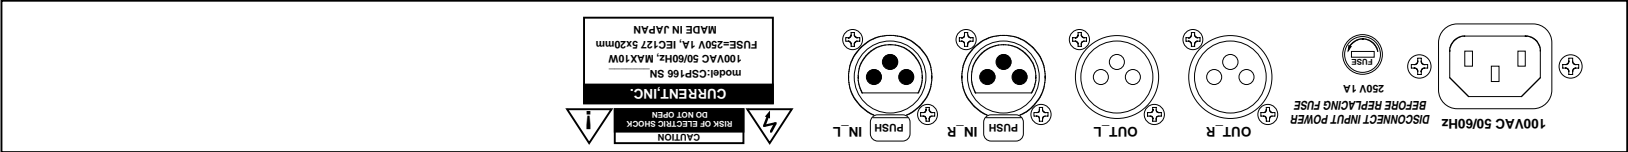

302.6



482.0

44.0

(c)CURRENT,INC.	MONITOR UNIT CSP166	SEP. 97
H.ICHIIHASHI	PANEL DIAGRAM	CSP166-D

Aug.2005