


# CURRENT PRODUCTS model:CSP202

## DIGITAL PROGRAM METER

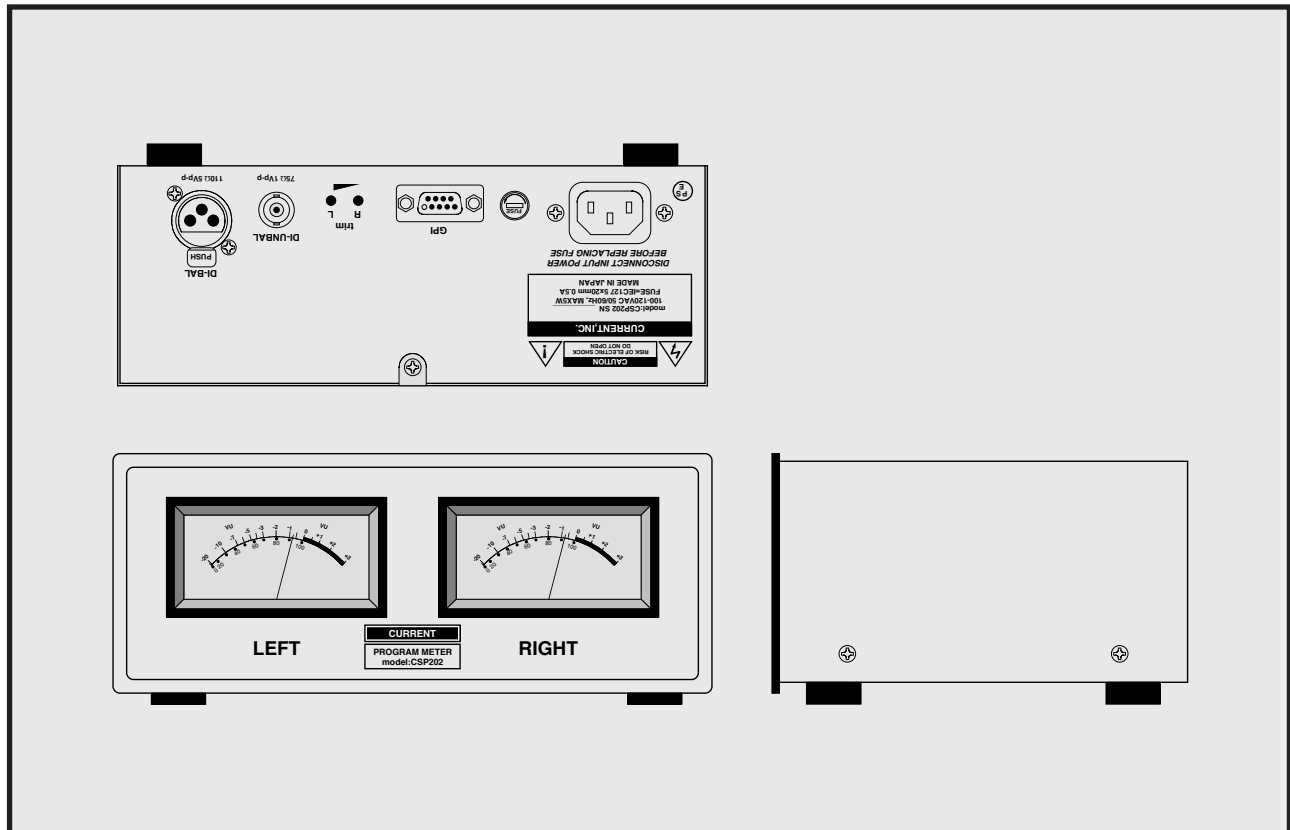

AES/EBU 2ch VU meter  
 Highest grade large size meter adoption  
 Balance, unbalance compatible  
 32k to 192kFs compatible  
 -20dBfs to 14dBfs adjustable  
 Maintenance-free illumination

*CSP202 is a digital program meter of 2ch specifications. It implements sifam made to a VU meter unit, and, as for this component, the adoption results with the large size console are a lot of and highly precise. In addition, it is beautiful and maintenance-free bulb-colored LED is mounted for the illumination of each meter.*

### "Audio input and output"

CSP202 implements DSUB25 of 110 Ω balance specifications and the BNC connector of 75 Ω unbalance specifications in audio input and the through output. It recognizes the connector which an input signal was connected to automatically. (simultaneous connection, impossible) In addition, it can use either of AES/EBU and the SPDIF in the consumer not being different from professional in audio data.

### "Trim"

The reference level of the VU meter is a trim located in the rear panel, and adjustment is possible in the range of -20dBfs to 14dBfs. In addition, the standard reference level is -20dBfs=+4dBu=0VU.

### "About Fs"

It follows it to 32-192kHz automatically, but, please do not change it during a working as much as possible. When you change it, please power

up again.

### "Others"

It is possible for a reference level and the panel name to customize, and, in that case, plate-making charges are necessary separately.



## SPECIFICATIONS

- 🍏 **BALANCED INPUT:** 110Ω, XLR3-F, 0.5~5Vpp
- 🍏 **UNBALANCED INPUT:** 75Ω, BNC, 0.5~5Vpp
- 🍏 **INPUT SIGNAL FORMAT:** AES3, AES3id, SPDIF
- 🍏 **RESOLUTION:** 16bit-24bit
- 🍏 **SAMPLING RATE:** 32~192kHz
- 🍏 **REFERENCE LEVEL:** -20dBfs~-14dBfs (Default= -20dBfs)
- 🍏 **FREQUENCY RESPONSE:** 20Hz-20kHz ±0.5dB
- 🍏 **METERS:** SIFAM R22AF/AL29WF Internal LED Lamp
- 🍏 **MAINS:** 100VAC 50/60Hz MAX 5W
- 🍏 **DIMENSIONS:** 223Wx88Hx153D, 2.5kg

AES 2ch meter	CSP202	¥248,000
Custom silk print		¥64,000
accessory : AC cable		

The specifications are subject to change without notice.  
 2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

MONITOR SYSTEM  
 HEADPHONES AMP  
 CUE SYSTEM  
 COMMUNICATION  
 TB, COUGH SYSTEM  
 MATRIX AMP  
 AUDIO ROUTER  
 AUDIO VIDEO  
 SWITCHER  
 SYSTEM SWITCHER  
 EMERGENCY  
 AUDIO VIDEO  
 DISTRIBUTOR  
 METER SYSTEM  
 ANALOG, DIGITAL  
 PREAMP MIXER  
 LEVEL UNIT  
 DIGITAL AUDIO  
 FADER UNIT  
 AUTO FADER  
 TALLY FADER  
 CLOCK, TIMER  
 EVENT SYSTEM  
 SPECIAL PRODUCTS  
 ETC.

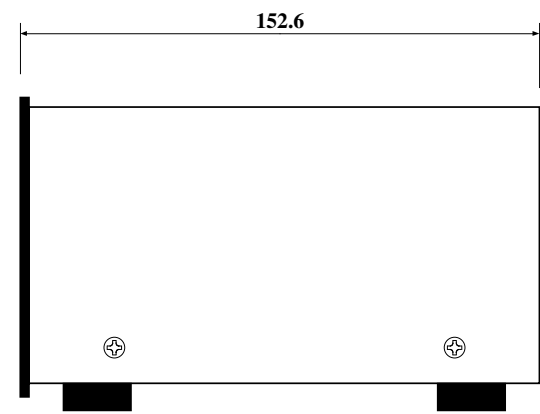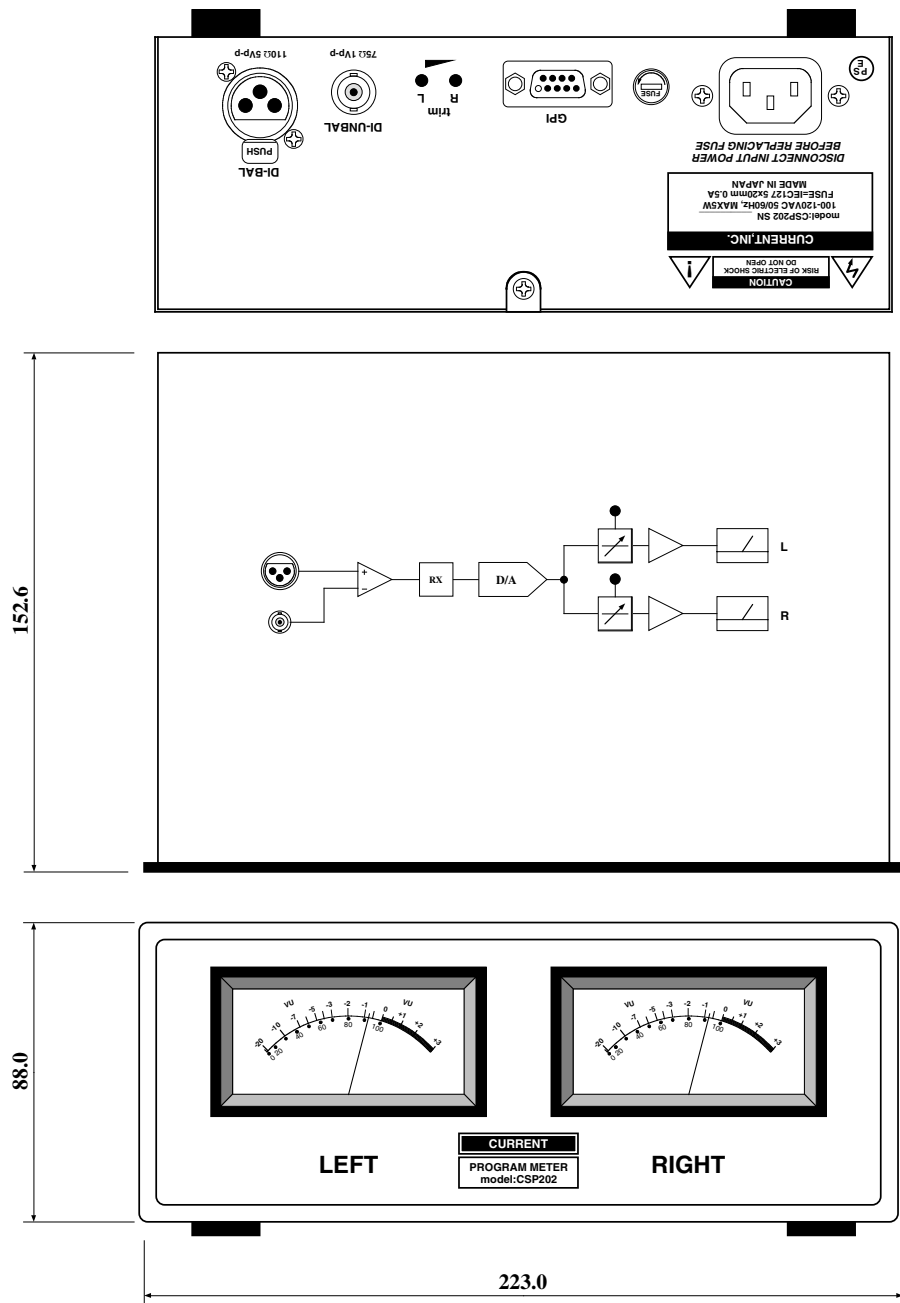

(c)CURRENT, INC.	<b>PROGRAM METER CSP202</b>	Nov.2010
H.ICHIHASHI	<b>PANEL DIAGRAM</b>	Oct.2007
		CSP202-D