


# CURRENT PRODUCTS model:CSP344

## MONITOR UNIT

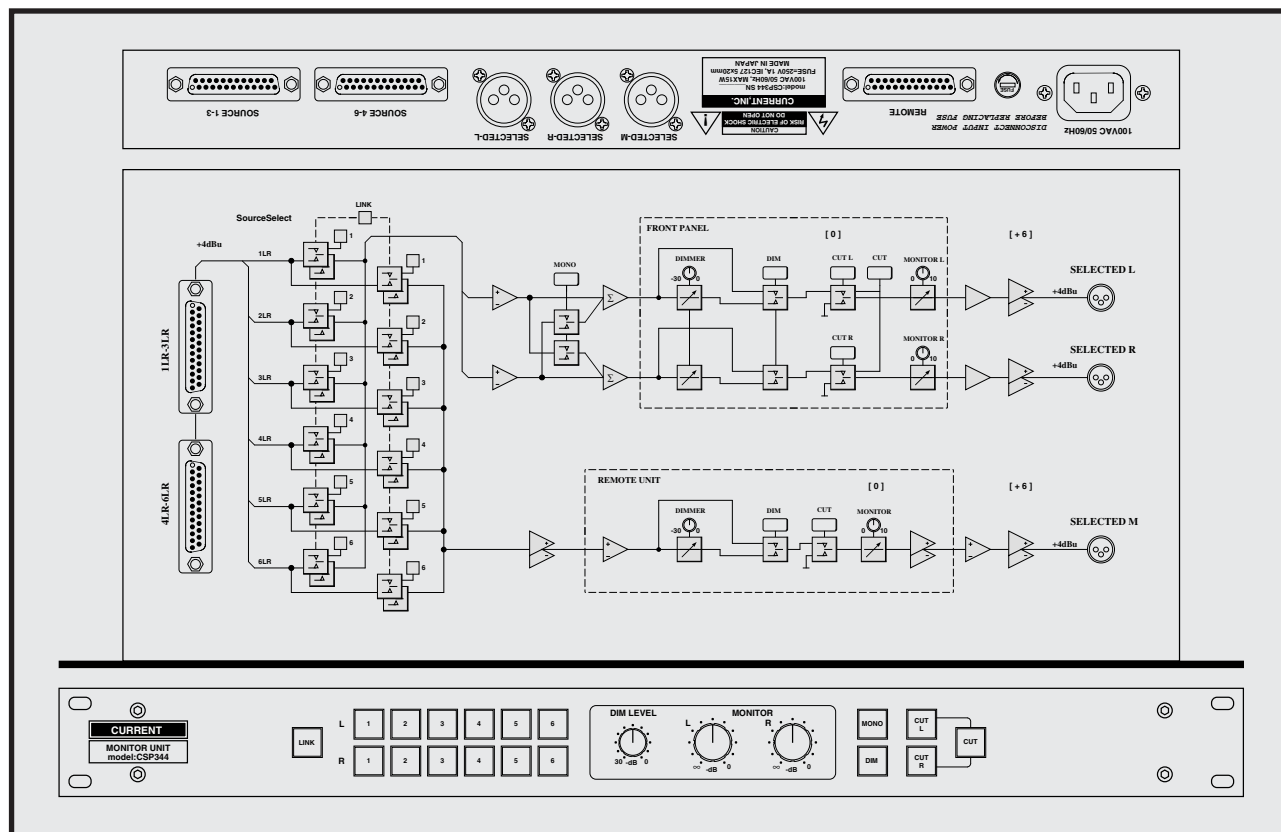

Simultaneous monitor stereo and mono  
Stereo monitor source of 6 systems  
Remote controller  
DIM level control  
Low noise, high-quality sound  
19 inches of 1 U size

**CSP344 is a monitor system with monitor function in a stereo and the mono. It provides sound without the coloring by a super low noise by parts selected carefully and superior circuit configuration. The monitor with the stereo can do it in the main frame of 1 U, and it is possible for monitor control in the mono with the compact remote unit.**

### "Output"

As for the independent stereo and the mono output, a signal controlled by each is output.

### "Monitor select"

In the main body of 1 U, it can choose the L and R of the stereo source of 6 systems independently. It chooses LR with the remote unit together.

### "DIM"

It can set a delicate monitor level when it uses continuous variable DIM levels of 0dB to -30dB together with a monitor level.

### "Monitor level"

In the main frame, it can control LR individually. In addition, it can control the cut of the output by LR independence, too. With the remote unit, it can control LR together.

### AUDIO INPUTS DSub25-F

01 1L +	14 1L -
02 1L 0	15 1R +
03 1R -	16 1R 0
04 2L +	17 2L -
05 2L 0	18 2R +
06 2R -	19 2R 0
07 3L +	20 3L -
08 3L 0	21 3R +
09 3R -	22 3R 0
10	23
11	24
12	25
13	



Remote Unit

### SPECIFICATIONS




- INPUTS: STEREO x6, BALANCED, 24kΩ (600Ω available)
- INPUT CONNECTOR: Dsub25-F(#4-40)
- INPUTS REFERENCE LEVEL: +4dBu, MAX=+24dBu
- OUTPUTS: STEREO x1, MONO x1, BALANCED, 50Ω
- OUTPUT CONNECTOR: XLR3-M
- OUTPUTS REFERENCE LEVEL: +4dBu, MAX=+24dBu
- FREQ.RESPONSE: 20 to 20kHz ±0.1dB
- THD: <0.01% at Ref.Level EIN: <-90dB
- MAINS: 100VAC 50/60Hz MAX 15W
- DIMENSIONS Main unit: 482Wx44Hx303D, 4kg
- DIMENSIONS Remote unit: 146Wx47Hx104D, 1kg
- REMOTE CONNECTOR: Dsub25-M(#4-40)




Main Unit

Main UNIT only	CSP344	¥480,000
with remote unit	CSP344R	¥560,000
accessory : remote cable 5m (CSP344R), AC cable		

The specifications are subject to change without notice.  
2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

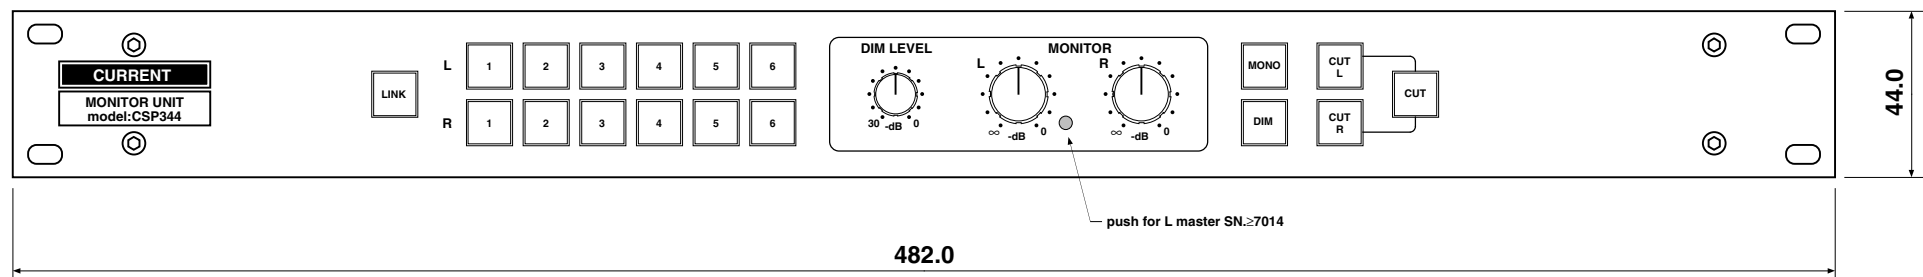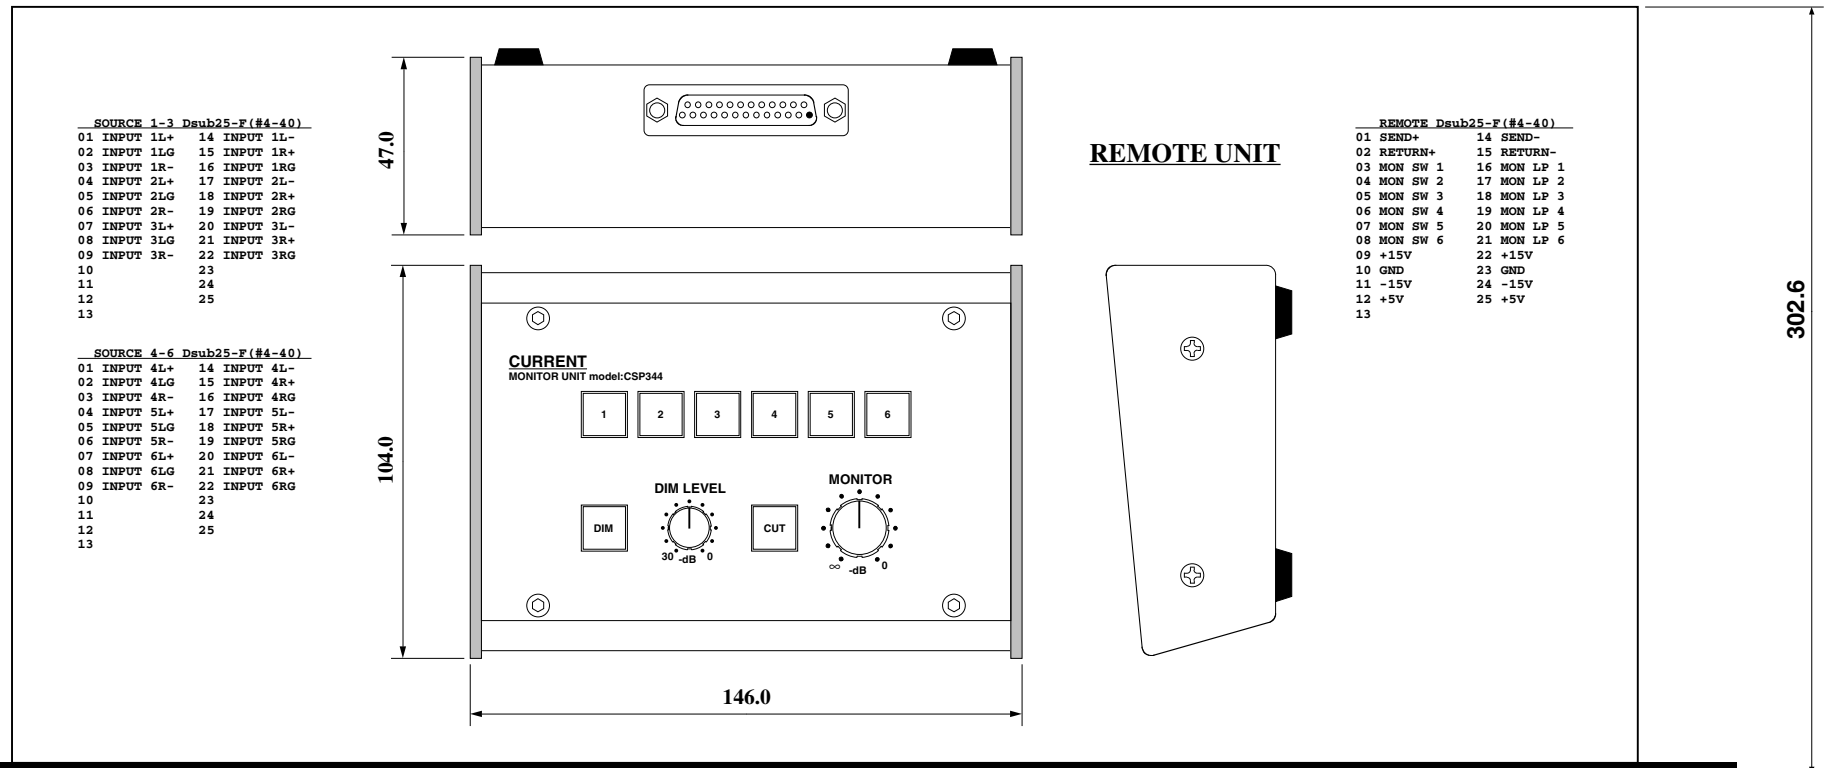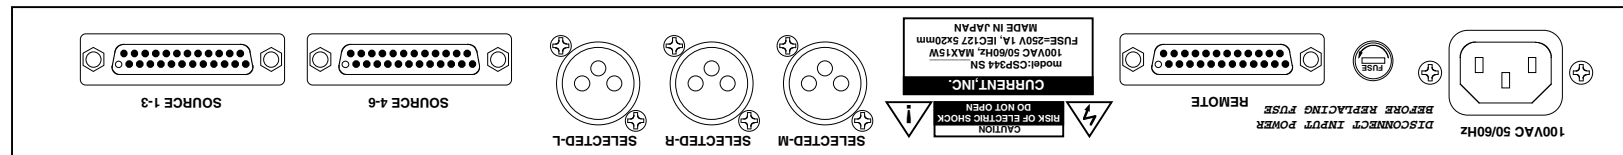

(c)CURRENT,INC.	CSP344 MONITOR UNIT	Mar.2022 Apr.2015
H.ICHIIHASHI	PANEL DIAGRAM	Aug.2005 CSP344-D2022

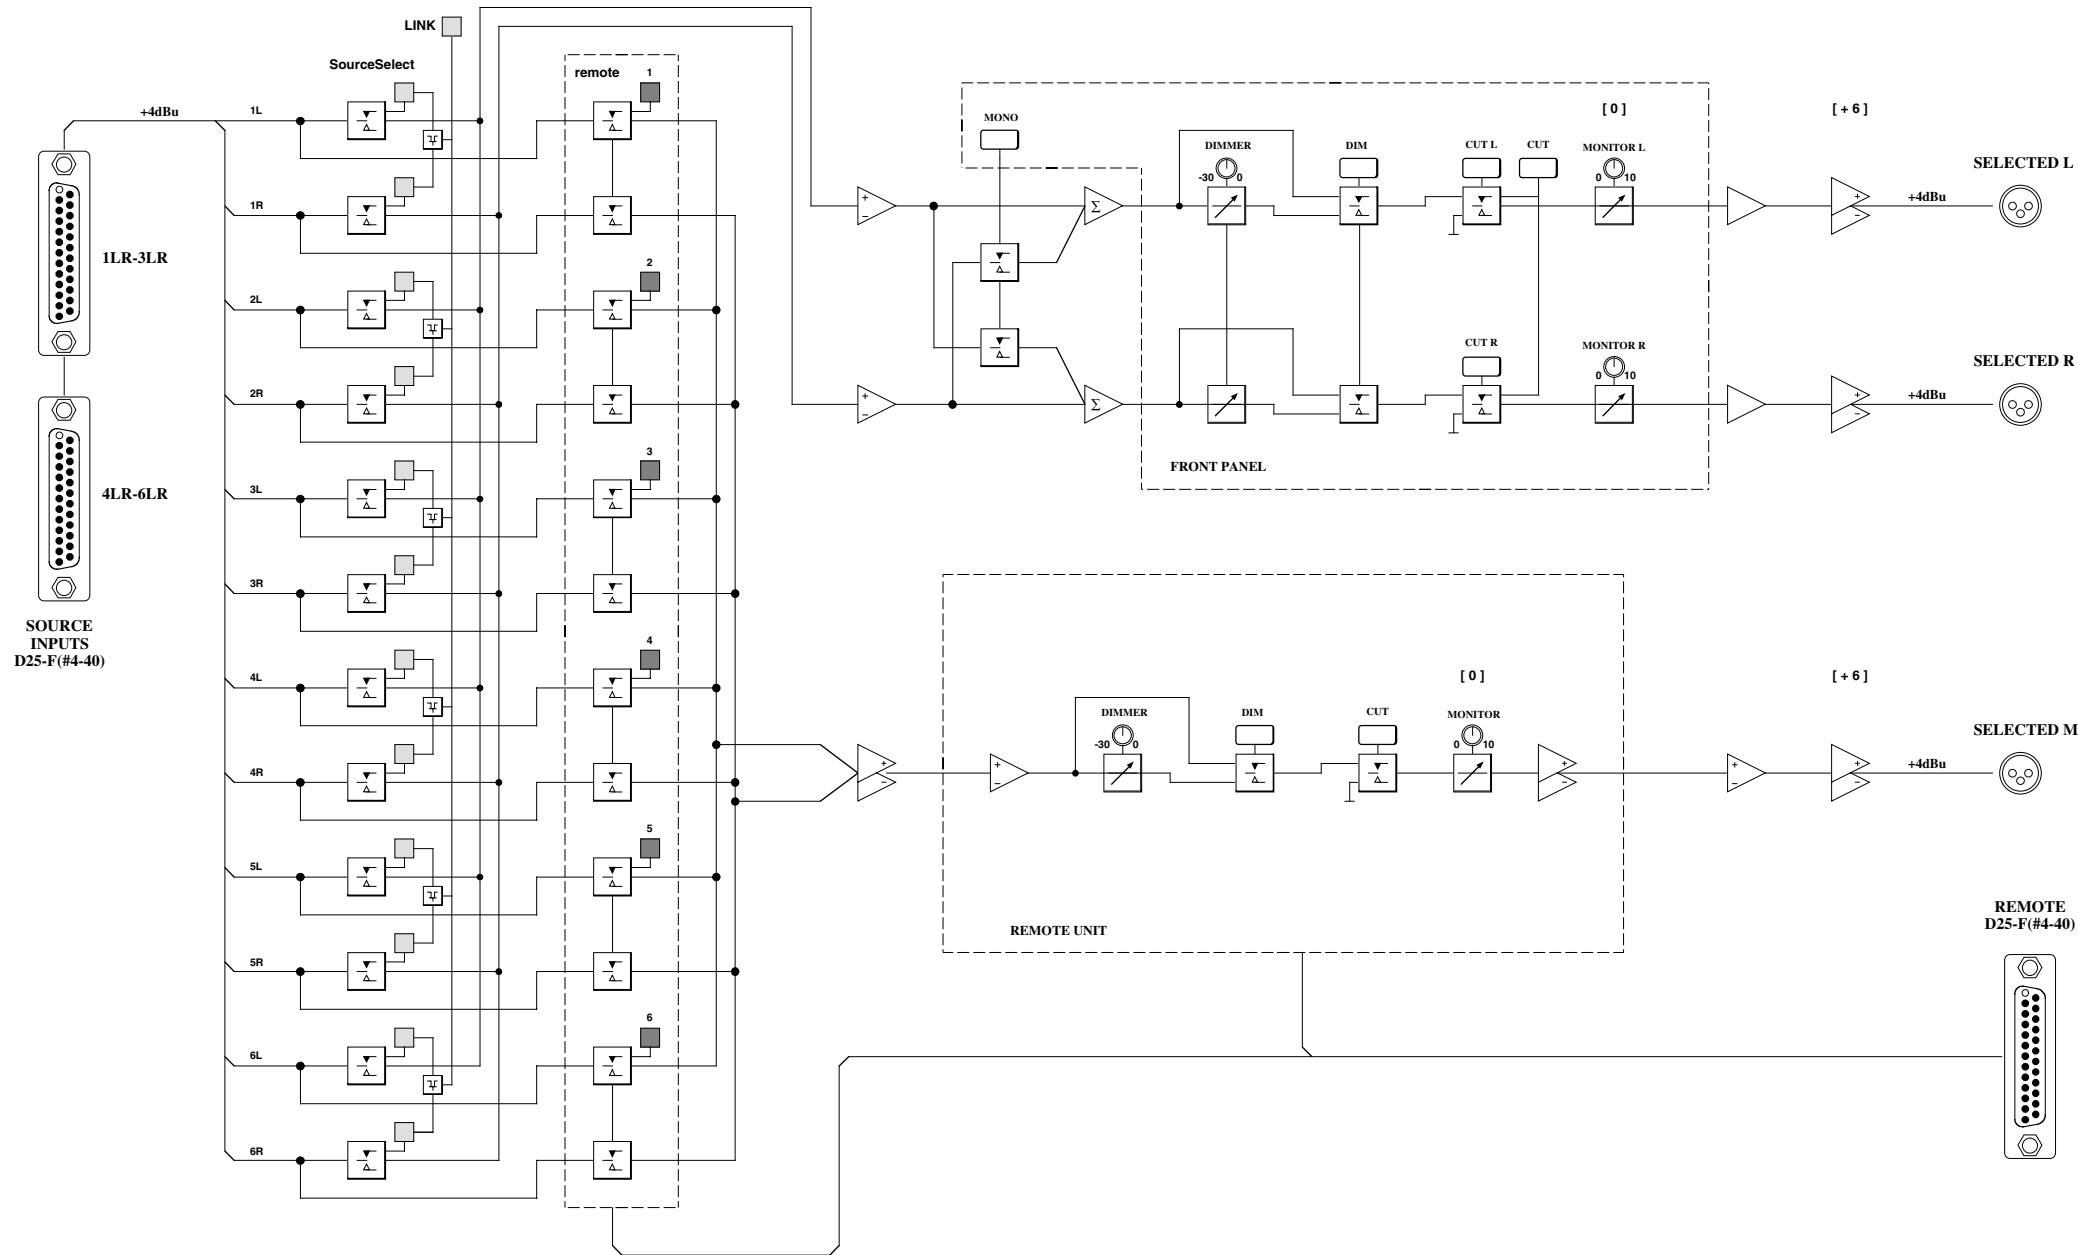

(c)CURRENT,INC.	MONITOR UNIT CSP344	Apr.2015
H.ICHIHASHI	SYSTEM DIAGRAM	Aug.2005
		CSP344-B

## CSP344 "1LR-3LR","4LR-6LR" D25-F(#4-40) Connector Pin List

Ribbon	Hard	Signal name	Designation	Active
1	1	1L+	INPUT 1L+	
2	14	1L-	INPUT 1L-	
3	2	GND	GND	
4	15	1R+	INPUT 1R+	
5	3	1R-	INPUT 1R-	
6	16	GND	GND	
7	4	2L+	INPUT 2L+	
8	17	2L-	INPUT 2L-	
9	5	GND	GND	
10	18	2R+	INPUT 2R+	
11	6	2R-	INPUT 2R-	
12	19	GND	GND	
13	7	3L+	INPUT 3L+	
14	20	3L-	INPUT 3L-	
15	8	GND	GND	
16	21	3R+	INPUT 3R+	
17	9	3R-	INPUT 3R-	
18	22	GND	GND	
19	10			
20	23			
21	11	GND	GND	
22	24			
23	12			
24	25	GND	GND	
25	13			

4 , 5 , 6 入力 は 1 , 2 , 3 を読み替えてください。

注意！ Dサブコネクタの接続はH A R D ピン番号で接続してください。

取付ビスは # 4 - 4 0 インチビスを使用して下さい。

**CAUTION! D-Connector for wiring refer to Hard pin number Description.**

**Mounting screw for D-connector use #4-40 size.**

## CSP344 "REMOTE" D25-F/M(#4-40) Connector Pin List

Ribbon	Hard	Signal name	Designation	Active
1	1	SEND+	SEND+	AUDIO
2	14	SEND-	SEND-	AUDIO
3	2	RETURN+	RETURN+	AUDIO
4	15	RETURN-	RETURN-	AUDIO
5	3	MON SW 1	MON SW 1	
6	16	MON LP 1	MON LP 1	
7	4	MO SW 2	MO SW 2	
8	17	MON LP 2	MON LP 2	
9	5	MON SW 3	MON SW 3	
10	18	MON LP 3	MON LP 3	
11	6	MON SW 4	MON SW 4	
12	19	MON LP 4	MON LP 4	
13	7	MON SW 5	MON SW 5	
14	20	MON LP 5	MON LP 5	
15	8	MON SW 6	MON SW 6	
16	21	MON LP 6	MON LP 6	
17	9	+15V	+15V	
18	22	+15V	+15V	
19	10	GND	GND	
20	23	GND	GND	
21	11	-15V	-15V	
22	24	-15V	-15V	
23	12	+5V	+5V	
24	25	+5V	+5V	
25	13			

注意！ Dサブコネクタの接続はH A R Dピン番号で接続してください。

取付ビスは # 4 - 4 0 インチビスを使用して下さい

**CAUTION! D-Connector for wiring refer to Hard pin number Description.**

**Mounting screw for D-connector use #4-40 size.**