


CURRENT PRODUCTS model:CSP345

MONITOR UNIT

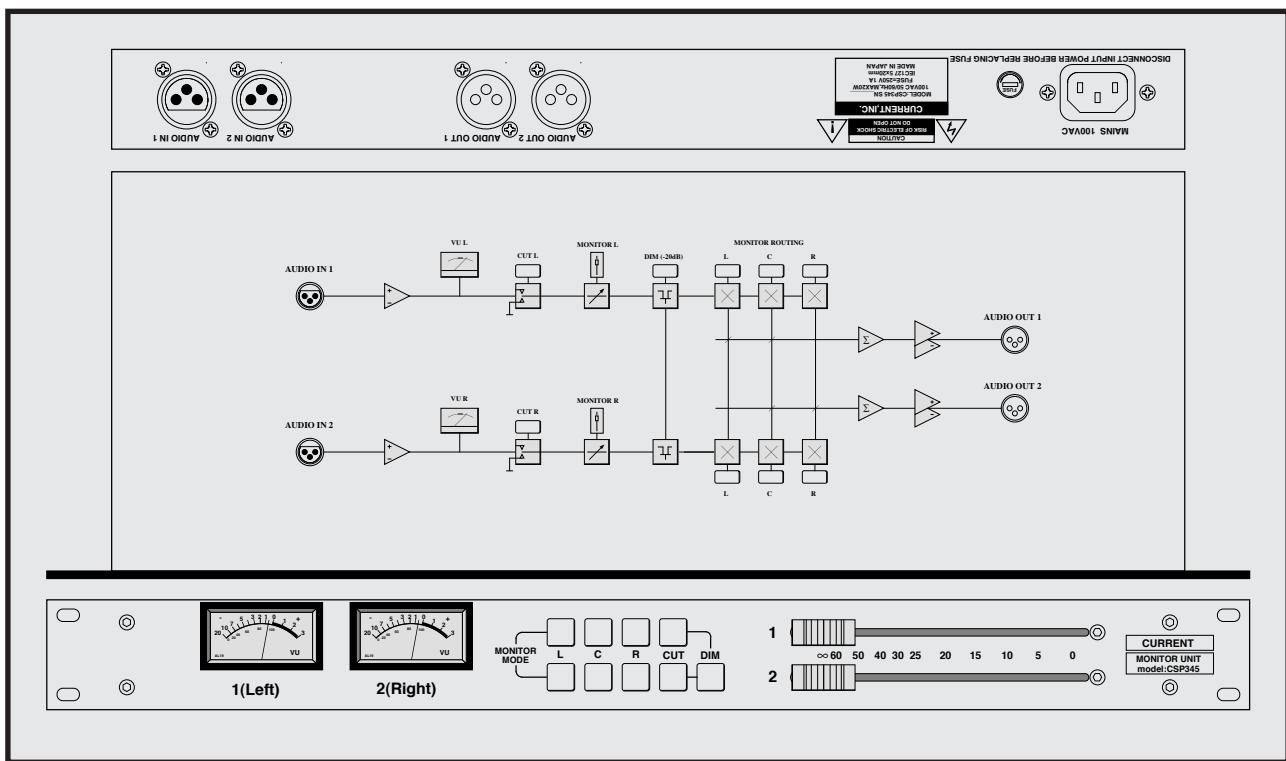

Stereo monitor unit

It is with VU meter

It is most suitable for editing room

Low noise, high-quality sound

Monitor mode switch

19 inches 1U size

CSP345 is stereo monitor unit which implemented left right independent monitor fader. It has provided in monitor logic to choose VU meter confirming input source and monitor mode.

"Monitor logic"

Left and right is independent and can assign L, R, C monitor logic of CSP345, and there is function of CUT and -20dB DIM.

"Remote"

There is type with fader section as remote as option model, too.

Fader stroke of this model is 60mm.



remote type

S P E C I F I C A T I O N S




- **INPUTS:** 24kΩ BALANCED
- **INPUTS REFERENCE LEVEL:** +4dBu, MAX=+24dBu
- **INPUTS CONNECTOR:** XLR3-F
- **OUTPUTS:** STEREO, 50Ω BALANCED
- **OUTPUTS REFERENCE LEVEL:** +4dBu, MAX=+24dBu
- **OUTPUTS CONNECTORS:** XLR3-M
- **FREQUENCY RESPONSE:** 20~20kHz ±0.1dB
- **THD:** < 0.01% at 1kHz, REFERENCE LEVEL
- **NOISE LEVEL:** < -90dBu
- **MAINSS:** 100VAC 50/60Hz, MAX 15W
- **DIMENSIONS:** 482Wx44Hx303D, 4.5kg

Monitor unit

CSP345

¥450,000

accessory : AC cable

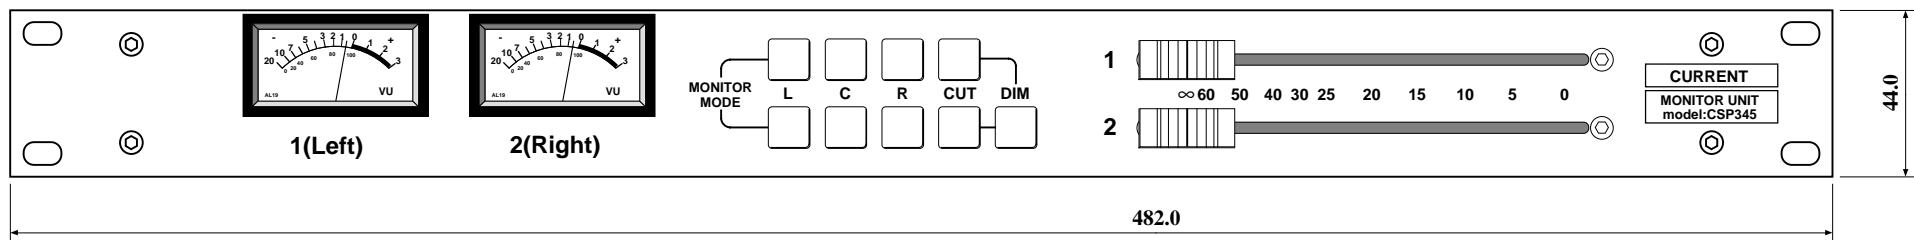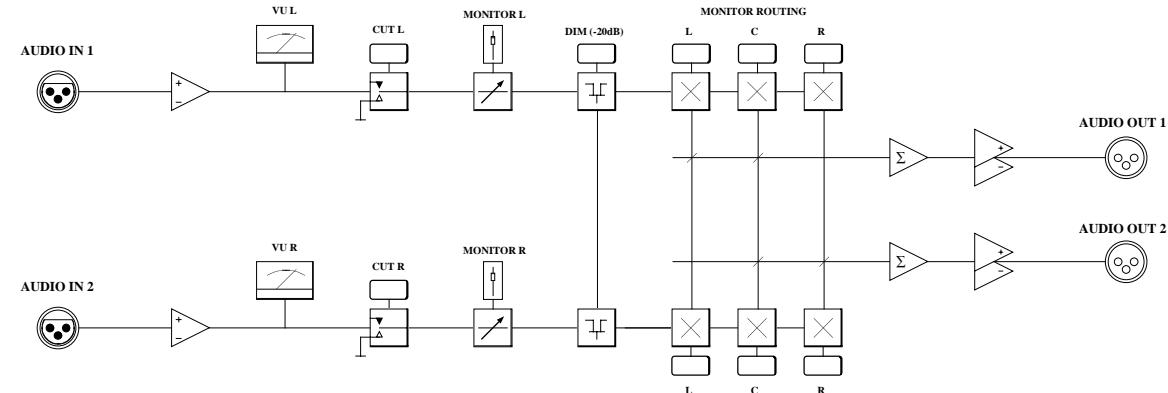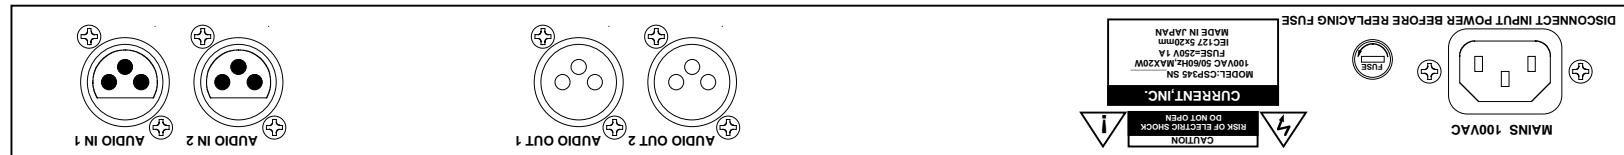

(c)CURRENT,INC.	MONITOR UNIT CSP345	NOV. 96
H.ICHIHASHI	PANEL DIAGRAM	CSP345-D