
CURRENT PRODUCTS model:CSP370 DIGITAL MONITOR

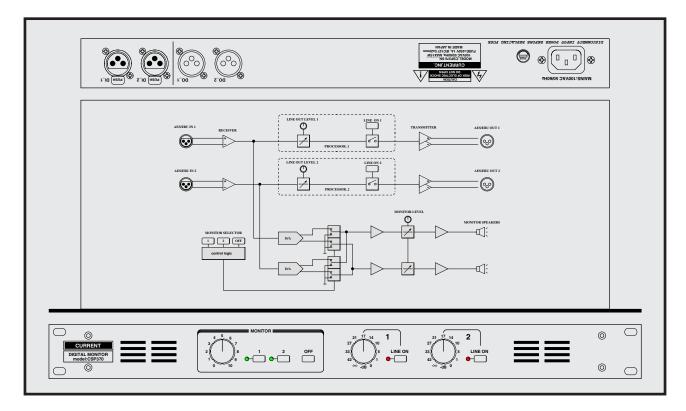

Dual digital audio level control Line ON/OFF Line out volume control Stereo monitor speaker 19 inches 10 size

CSP370 is digital monitor unit that dual digital audio line out level, ON/OFF, monitor with speaker are possible. It is most suitable as the digital line out key to CD, MD.

"Line out"

2 path is independent and is continuous variable possibility at line out level in the range of to 0dB to infinite. Additionally, it can turn on the output with LINE ON button.

"Monitor"

It switches either 2 path and can monitor it with speaker. Monitor source is led by input section and can monitor even state of LINE off. In addition, it is not controlling emphasis with DA converter for monitors.

"FS, emphasis"

It is supporting to sampling frequency of 44.1kHz and 48kHz. It handles only level and outputs it in through without handling it about channel status, validity, users bit and emphasis.



S P E C I F I C A T I O N S

AES/EBU INPUT: BALANCED 110Ω XLR3-F
AES/EBU OUTPUT: BALANCED 110Ω XLR3-M
RESOLUTION: 16bit
SAMPLING RATE: 44.1kHz & 48kHz
EMPHASIS: NO PROCESSED
CONTROL: LINE LEVEL, CUT, MONITOR LEVEL
ELEVEL CONTROL: 0~-60dB,∞
MONITOR SPEAKERS: STEREO MAX 500mW
MAINS: 100VAC 50/60Hz MAX=15W
DIMENSIONS: 482Wx44Hx303D 4kg


Digital monitor CSP370


¥450 ,000

accessory : AC cable

2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN TEL:81-3-3321-9559 FAX:81-3-5376-2735 The specifications are subject to change without notice.



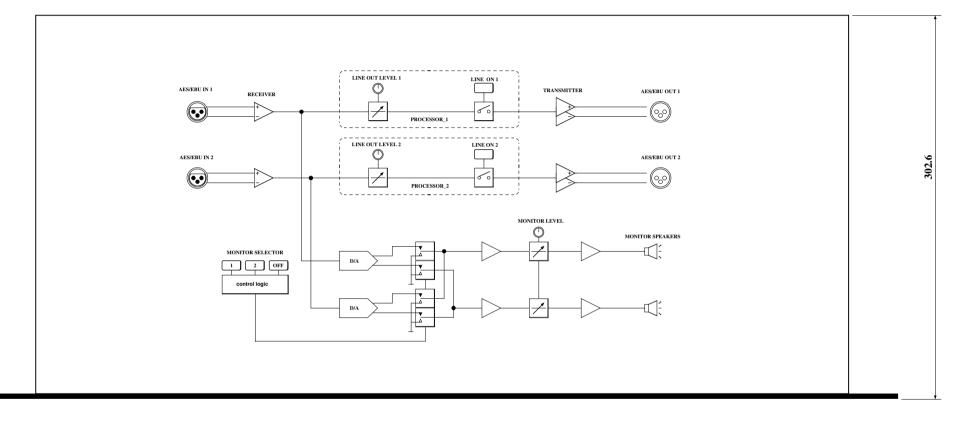

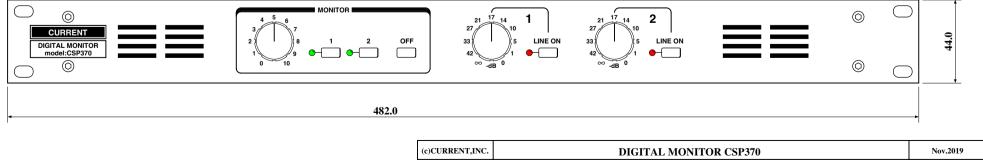

(c)CURRENT,INC.	DIGITAL MONITOR CSP370	Nov.2019	l
H.ICHIHASHI	PANEL DIAGRAM	CSP370-D2019	