


CURRENT PRODUCTS model:GPS705

VTR SYSTEM SWITCHER

REAR PANEL

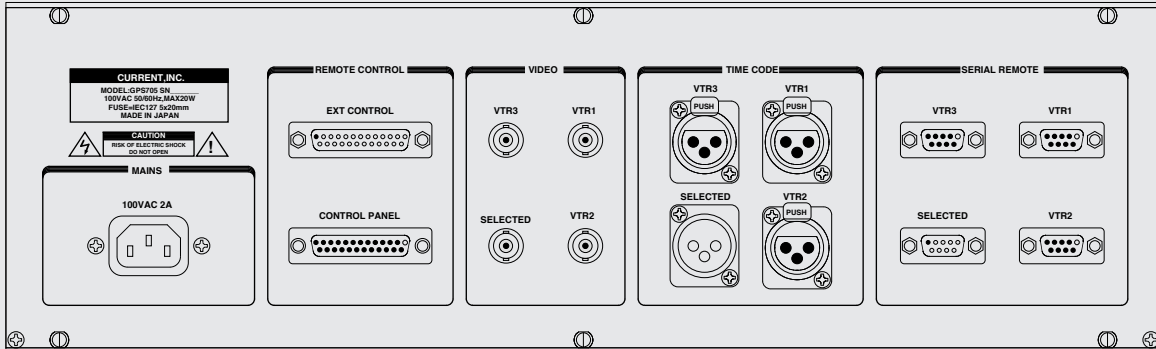

9P remote switch of 3:1
 Timecode switch of 3:1
 Composite video switch of 3:1
 Remote control
 19 inches 3U size

GPS705 is the system switcher which is switchable in 3 VTR, and 9P remote, LTC, the switch of the video are possible.

"Switching"

A signal switch of GPS705 is all pin switches by the relay and does not choose a connected model and a signal. In addition, without a noise by the switching, it can ignore most of the signal loss, too.

"Control"

It is standard specifications to make by remote control from switch panel of the external, and the switch control of GPS705 is optional and can mount a switch to main frame front panel.

"Others"

Please refer about the system switcher of different specifications.



SPECIFICATIONS

- 🍏 9P REMOTE INPUT: Dsub9-F(#4-40) x3
- 🍏 9P REMOTE SELECTED: Dsub9-M(#4-40)
- 🍏 TC INPUT: XLR3-F x3
- 🍏 TC SELECTED: XLR3-M
- 🍏 VIDEO INPUT: BNC 75Ω x3
- 🍏 VIDEO SELECTED: BNC 75Ω
- 🍏 REMOTE CONTROL: Dsub25-F(#4-40)
- 🍏 CONTROL PANEL: USER DEFINED
- 🍏 MAINS: 100VAC 50/60Hz, MAX=30W
- 🍏 DIMENSIONS: 483Wx132.5Hx350D, 7kg

System switcher	GPS705	¥640,000
accessory : AC cable		

GPS705 "Control Panel " Dsub25-F(#4-40)

Ribbon	Hard	Signal name	Designation	Active
1	1	SW COM	SWITCHES COMMON	0V
2	14	LP COM	LAMPS COMMON	+5V
3	2	SW1	SELECT SWITCH 1	LO
4	15	LP1	SELECT TALLY 1	LO
5	3	SW2	SELECT SWITCH 2	LO
6	16	LP2	SELECT TALLY 2	LO
7	4	SW3	SELECT SWITCH 3	LO
8	17	LP3	SELECT TALLY 3	LO
9	5			
10	18			
11	6			
12	19			
13	7			
14	20			
15	8			
16	21			
17	9			
18	22			
19	10			
20	23			
21	11			
22	24			
23	12			
24	25			
25	13			

GPS705 "Serial Port" VTR1-3:D9-F, Selected:D9-M (#4-40)

1	1	S-1	GND	
2	6	S-2	GND	
3	2	S-3	TX-B	
4	7	S-4	TX-A	
5	3	S-5	RX-A	
6	8	S-6	RX-B	
7	4	S-7	GND	
8	9	S-8	GND	
9	5	S-9	SPARE LINE	

注意！ Dサブコネクタの接続はHardピン番号で接続してください。

CAUTION! D-Connector for wiring refer to Hard pin number Description.

Mounting screw for D-connector use #4-40 screw.