


CURRENT PRODUCTS model:SL415

EVENT DISPLAY

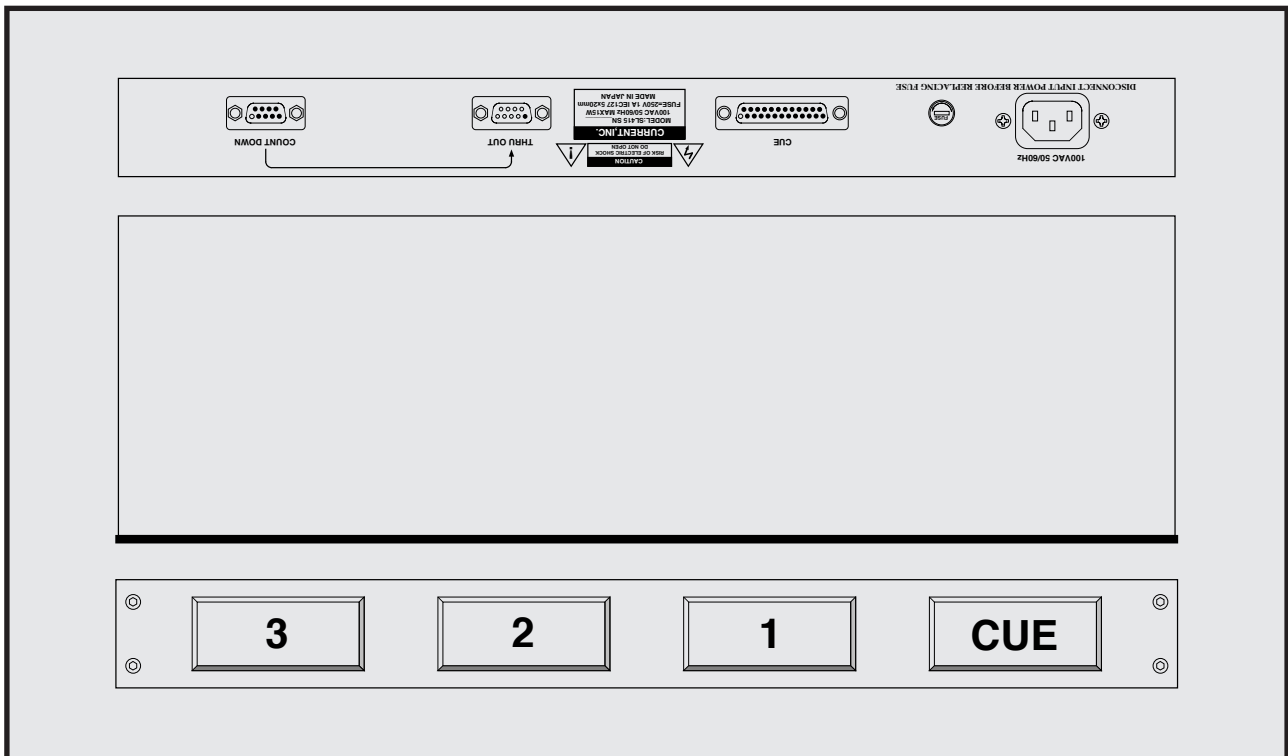

Event count down display
 Large display
 CUE tally display
 19 inches 1U size

It is the display which SL415 counts down with 3, 2, 1 and indicates. It adopts a large display and is extremely superior in visibility.

"Countdown"

When an event is input into countdown input, it counts down with 3, 2, 1 and indicates it. There are the specifications it accepts the event 5 seconds ago, and, likewise, to count down. Additionally, it can insert the throughout on the way of an available event line, too.

"CUE"

There is 1 display as the display for external carries and it is CUE display by default, but can make for other display because it can easily change the name.

"Others"

Please refer to specifications of the non-standard for Seki shitemodeo.

SPECIFICATIONS

- 🍏 COUNT DOWN CONNECTOR: Dsub9-F(#4-40)
- 🍏 EXT TALLY INPUT CONNECTOR: Dsub9-M(#4-40)
- 🍏 CUE TALLY INPUT CONNECTOR: Dsub25-M(#4-40)
- 🍏 INPUT INTERFACE: OPTOCOUPLER
- 🍏 MAINS: 100VAC 50/60Hz MAX 10W
- 🍏 DIMENSIONS: 430Wx44Hx303D, 3.5kg

Event display	SL415	¥248,000
accessory : AC cable		

SL415 Connector Pin List

"CUE" D25-F(#4-40) Connector				
Ribbon	Hard	Signal name	Designation	Active
1	1	0V	0V	
2	14	+24V	+24V SUPPLY	
3	2			
4	15	 <p>+ 5Vから + 24Vまで入力できます。</p>		
5	3			
6	16			
7	4			
8	17			
9	5			
10	18			
11	6	CUE+	CUE フォトカプラ入力 +	
12	19	CUE-	CUE フォトカプラ入力 -	
13	7			
14	20			
15	8			
16	21			
17	9			
18	22	CUE入力に接点を接続する場合には、CUE+を +24Vに接続して、CUE-と0Vをメイクして下さい。 定電流入力のため、抵抗は必要ありません。		
19	10			
20	23			
21	11			
22	24			
23	12	注意！ Dサブコネクタの接続はHardピンの番号で接続してください。		
24	25			
25	13			

"COUNT DOWN" D9-F(#4-40) Connector				
Ribbon	Hard	Signal name	Designation	Active
1	1	COM	COMMON (GND)	0V
2	6			
3	2	COUNT	COUNT DOWN COMMAND	L
4	7	コントロール入力は10kでプルアップされて		
5	3			
6	8			
7	4			
8	9	注意！ Dサブコネクタの接続はHardピンの番号で接続してください。		
9	5			