


# CURRENT PRODUCTS

## LEXPURE & LEXTEND

It is a good news to you of the trouble with contact failure such as a switch, the volume of every kind. The people of the trouble think that there is many it by troubles such as a switch, the volume, but as a result of having made a try of cleaners and protective materials of every kind, tell it because "Lexpure", "Lextend" got a result having good. After having washed it in Lexpure well when it uses it, please make contact protection in Lextend by all means. In addition, please use the Lextend less. The washing of the contact is 1 set of 2 of them by all means.

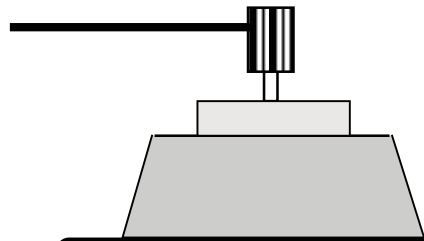

**Non-Freon  
An electronic  
equipment cleaner**

**LEXPURE**

Does not contain CFCs, chlorinated solvents.  
After washing, it does not leave a residue at all.  
We do not have to worry about the dew condensation.  
Voltage endurance 35,000V  
It is most suitable for cleaning of the screen of the computer screen.  
It OK's the ball cleaning of the mouse.  
Time of drying is shortened when it uses the warm wind such as dryers.  
It shows an effect for apparatus panel side cleaning.  
It is 420ml inner capacity  
It is 270ml the first petroleum  
Fire strict prohibition

**CHEMSEARCH**

### "Caution of operation"

It avoids the washing of the heating component, and, please wash it after going back up to normal temperature. There is inflammability, and, please do not use it in the circumferences such as during electricity and fire, the spark. It avoids inhalation of the steam that you last for long time, and, please use it with the ventilation, ventilation.  
Please avoid the long-time contact with the silicone rubber. Please read a can label before use by all means.



**Electronic equipment  
use, dampproofing  
Corrosion-proofing,  
lubrication protective  
texture**

**LXTEND**

It protects an apparatus from corrosion resistance gas and moisture.  
Be superior to water displacement characteristics and send water of the board surface.  
It smoothens the desorption (a card edge) of the board and prevents abrasion of the slide side.  
Voltage endurance 35,000V  
Because it is a pole thin oil film, it does not disturb the electricity of the contact.  
It is safe to various plastic of the electronic equipment, rubber, metal.  
Does not contain CFCs, chlorinated solvents.  
Contents: 420ml  
The first petroleum: 250ml  
fire strict prohibition

**CHEMSEARCH**

Lexpure ¥6,000  
Lextend ¥6,200  
accessory : None