


302.6

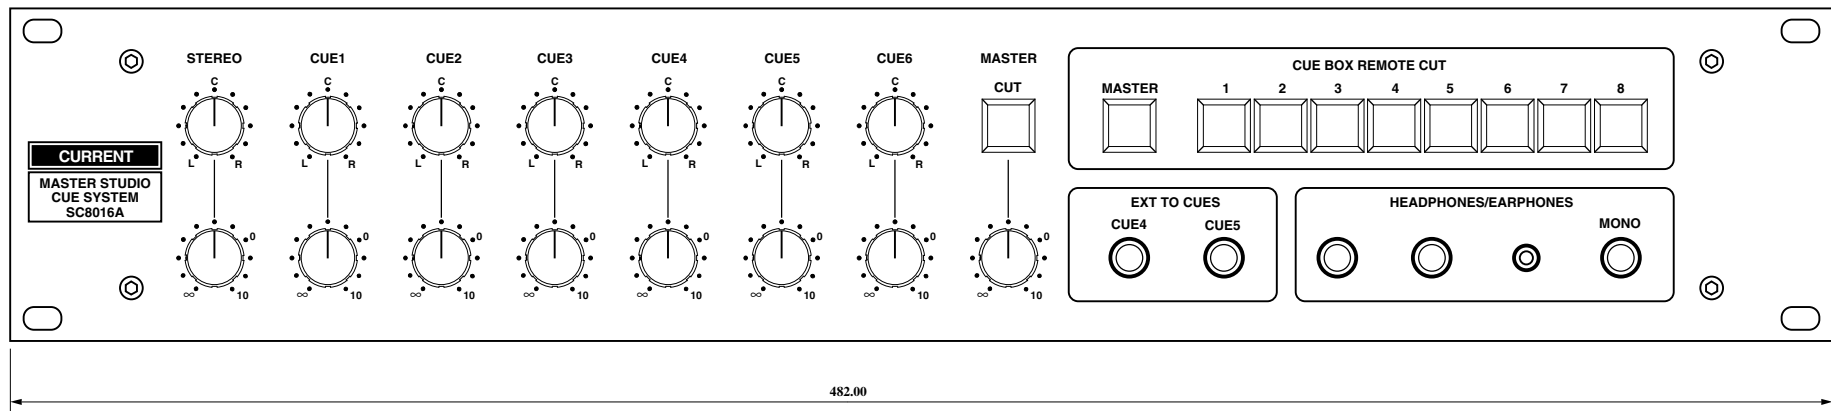

88.00

482.00

(c)CURRENT, INC.	SC8016A-2U	JAN.2002
H.ICHIHASHI	PANEL DIAGRAM	SC8016A-2U

SC8016-2U CUE System Connector Pin List

SC8016-2U "Dsub25-M (M2.6)

Ribbon	Hard	Signal name	Designation	Active
1	1	CUT01	CUE BOX CUT 01 (ACTIVE=0V)	Lo
2	14	CUT02	CUE BOX CUT 02 (ACTIVE=0V)	Lo
3	2	CUT03	CUE BOX CUT 03 (ACTIVE=0V)	Lo
4	15	CUT04	CUE BOX CUT 04 (ACTIVE=0V)	Lo
5	3	CUT05	CUE BOX CUT 05 (ACTIVE=0V)	Lo
6	16	CUT06	CUE BOX CUT 06 (ACTIVE=0V)	Lo
7	4	CUT07	CUE BOX CUT 07 (ACTIVE=0V)	Lo
8	17	CUT08	CUE BOX CUT 08 (ACTIVE=0V)	Lo
9	5			
10	18			
11	6			
12	19			
13	7			
14	20			
15	8			
16	21			
17	9			
18	22			
19	10			
20	23			
21	11	+26.5V	+26.5V SUPPLY	+26.5V
22	24	+26.5V	+26.5V SUPPLY	+26.5V
23	12	+0.0V	+26.5V SUPPLY COMMON (CUT SWITCH COMMON)	0V
24	25	+0.0V	+26.5V SUPPLY COMMON (CUT SWITCH COMMON)	0V
25	13	NC	NONE CONNECTION	

CAUTION! D-Connector for wiring refer to Hard pin number Description. Mounting screw for D-connector use #4-40 size.

注意！ Dサブコネクタの接続はHardピン番号で接続してください。取付ビスは#4-40インチビスです。