


# CURRENT PRODUCTS model:TB966

## TALKBACK BOX

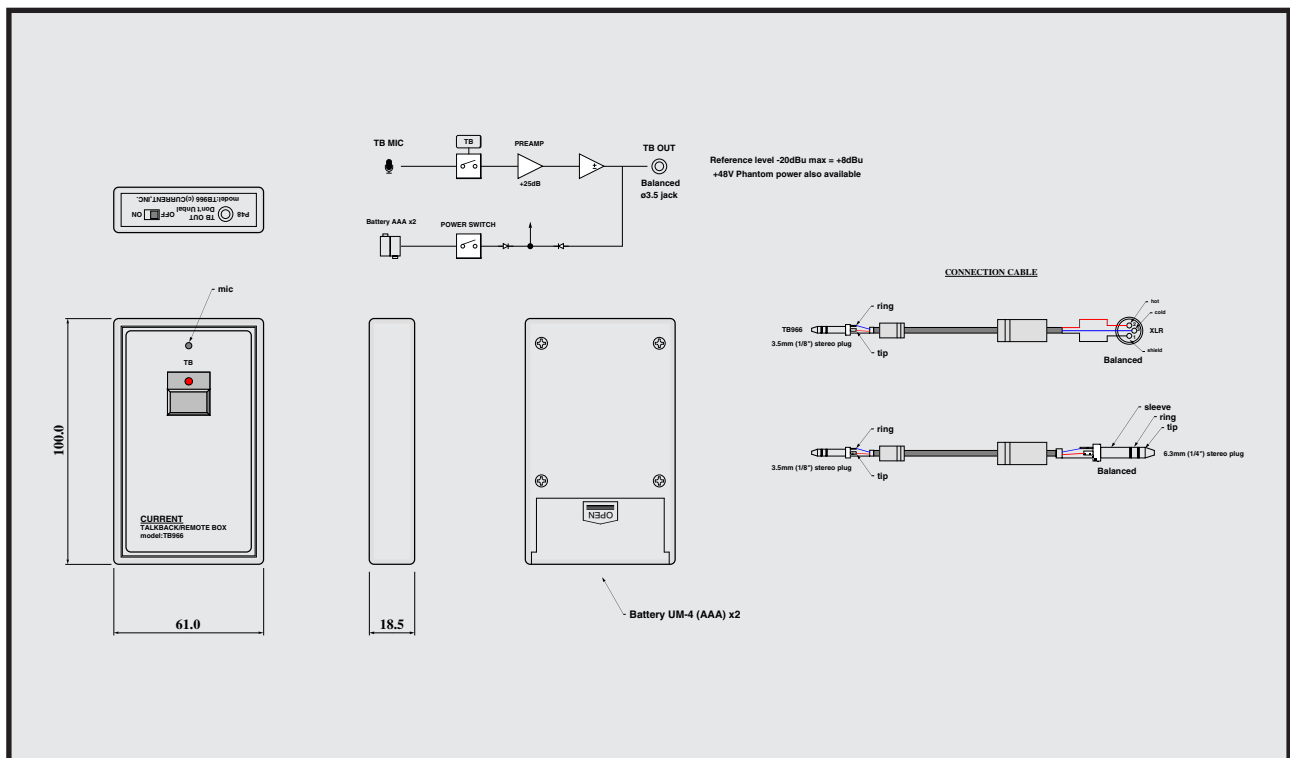

### PTT TALKBACK

Built-in microphone and preamplifier  
Talkback without interface, Balanced output  
Battery or phantom power ( $\geq$ rev3)  
Compact, Easy installation

**TB966 is a stand-alone TB box. The TB966 is an all-in-one type with built-in batteries, so there is no need for installation work. just push the TB button and the TB signal is output from the output port, so simply connect powered speakers to complete your talkback system. It can also be used as a sound collector or hearing aid by connecting headphones or earphones.**

### "Function"

The talkback signal is output only while the TB button is pressed. The output level is approximately -20 dBu, so it can be directly connected to the line input of powered speakers or mixers. A delay circuit reduces annoying switch noise.

### "Connection"

The output connector is a 1/8" 3P mini-jack balanced output with a differential circuit for clear communication even with long cables. To avoid problems caused by noise, be sure to connect to XLR or TRS balanced input devices. Be careful when using conversion plugs. Unbalanced connection is not possible.

### "Power supply"

The power supply is designed for ultra-low power consumption and can operate for about 1000 hours (about one month) on two AAA alkaline batteries.

### "Usage notes"

The +48V phantom power supply is also supported for rev3 or higher, expanding the range of applications. When using the unit exclusively with +48V phantom power supply or when not using it for a long period of time, remove the batteries. If the batteries are used for a long time, hydrogen gas will be generated from the inside of the batteries, which will open the explosion-proof safety valve and induce leakage. For alkaline batteries, use products that claim to prevent leakage. When the LED on the TB button stops lighting up, it is a sign that the battery has reached the end of its useful life.




### "Other"

The TB969G15 (15cm) or TB969G30 (30cm) with gooseneck microphone are also available.


### SPECIFICATIONS

- 🍏 **OUTPUT : BALANCED**
- 🍏 **OUTPUT CONNECTOR: 1/8" 3P JACK (3.5mm STEREO JACK)**
- 🍏 **OUTPUT IMPEDANCE : 320Ω**
- 🍏 **MAXIMUM OUTPUT LEVEL: +8dBu**
- 🍏 **PREAMP GAIN: +25dB**
- 🍏 **CONTROL: TB SWITCH**
- 🍏 **INDICATOR: TB ON LED**
- 🍏 **POWER: AAA size Alkaline or Lithium battery x2**
- 🍏 **DIMENSIONS: 61Wx100Hx19D**


TB966 TALKBACK BOX	¥19,800
TB966-W01 XLR CABLE 5m	¥6,500
TB966-W02 XLR CABLE 10m	¥7,000
TB966-W03 XLR CABLE 15m	¥8,500
TB966-W04 XLR CABLE 20m	¥10,000
TB966-W11 XLR CABLE 1.5m	¥6,500
TB966-W12 XLR CABLE 3m	¥6,500
accessory: AAA Alkaline battery x2	

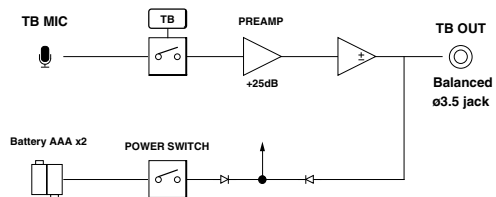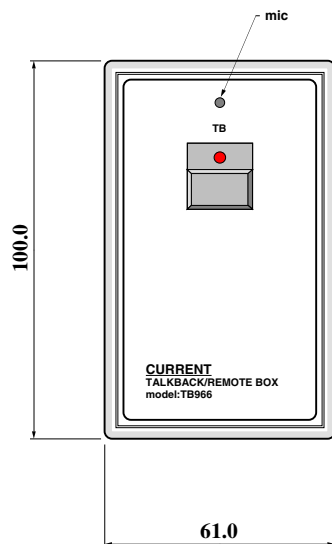

Reference level -20dBu max = +8dBu  
+48V Phantom power also available

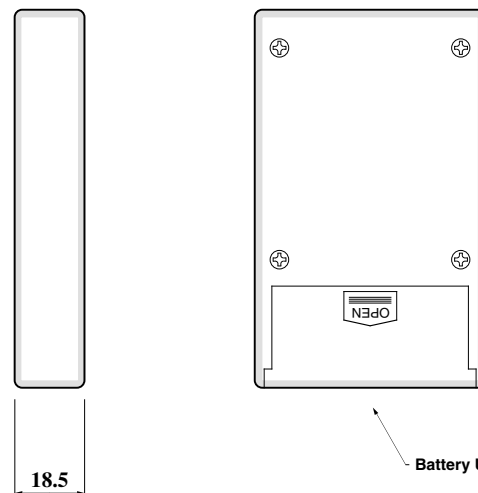

#### CONNECTION CABLE

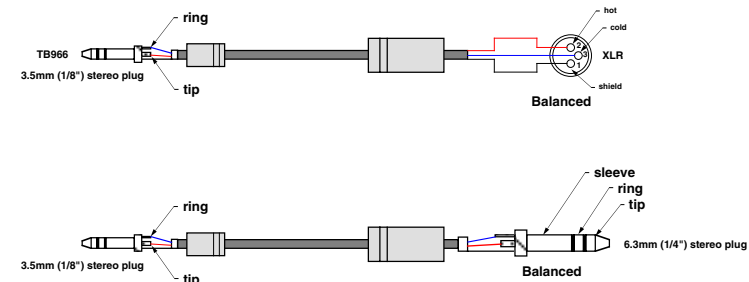

rev.7

(c)CURRENT,INC.	TALKBACK BOX TB966	Jul.2023
H.ICHIMASHI	PANEL DIAGRAM	TB966-D rev7