


# CURRENT PRODUCTS model:AF322

## LTC DISPLAY

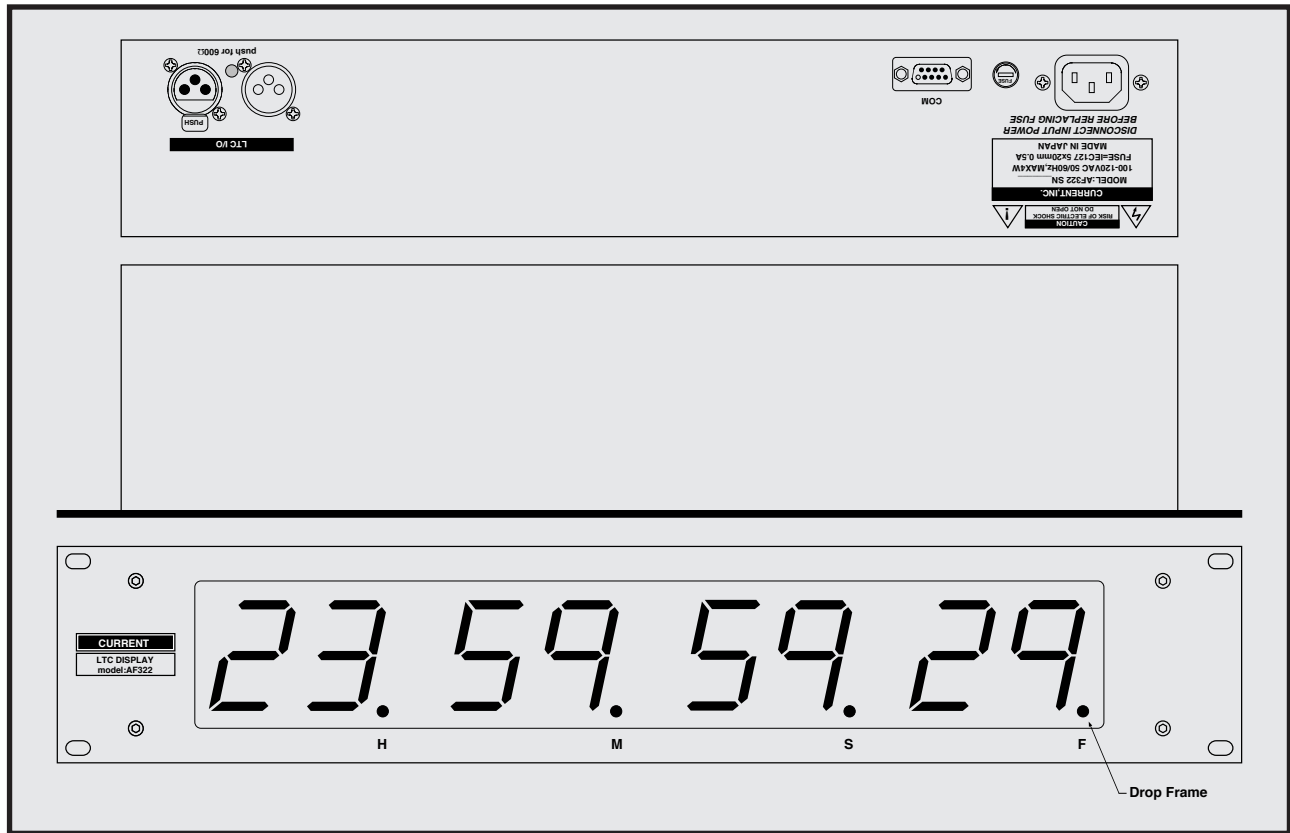

Large LTC display  
The through output  
600  $\Omega$  line support  
19 inches 2U size

**AF322 is LTC display using the large LED with high visibility. It reads it from 1/30 to 20 times speed and it is possible and supports in a frame rate of 24, 25, 29.97 and 30.**

### "Input and output"

As for the input, a female of XLR3, the through output are male connectors of XLR3. The input and output connectors is directly connected to and can input from either. Moreover, the 600  $\Omega$  termination switch is implemented, too.

### "Display"

The display uses red LED of the 45mm size, and the visibility is very high. In addition, in the case of LTC of the Drop frame, the decimal point of the digit of 1 frame turns on.

### "Others"

Please refer about supporting to larger size, a different shape, TMC100, serial time data input.






### SPECIFICATIONS

- 🍏 **INPUT:** XLR3-F, BNC
- 🍏 **THRU OUTPUT:** XLR3-M, BNC
- 🍏 **FRAME RATE:** 24, 25, 29.97, 30Hz
- 🍏 **SMPTE RATE:** x1 to x20
- 🍏 **INPUT LEVEL:** -20 to +15dBu
- 🍏 **ERROR BYPASS:** 5 Frame
- 🍏 **COM PORT:** Dsub9-F (#40-40)
- 🍏 **MAINS:** 100VAC 50/60Hz MAX10W
- 🍏 **DIMENSIONS:** 482Wx88Hx153D, 4kg

LTC display	AF322	¥480,000
	accessory : AC cable	

The specifications are subject to change without notice.  
2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

MONITOR SYSTEM  
HEADPHONES AMP  
CUE SYSTEM  
TFC COUGH SYSTEM  
COMMUNICATION  
MATRIX AMP  
AUDIO ROUTER  
AUDIO VIDEO  
SWITCHER  
SYSTEM SWITCHER  
EMERGENCY  
AUDIO VIDEO  
DISTRIBUTOR  
METER SYSTEM  
ANALOG, DIGITAL  
PREAMP MIXER  
LEVEL UNIT  
DIGITAL AUDIO  
FADER UNIT  
AUTO FADER  
TALLY FADER  
CLOCK TIMER  
EVENT SYSTEM  
SPECIAL PRODUCTS  
ETC.

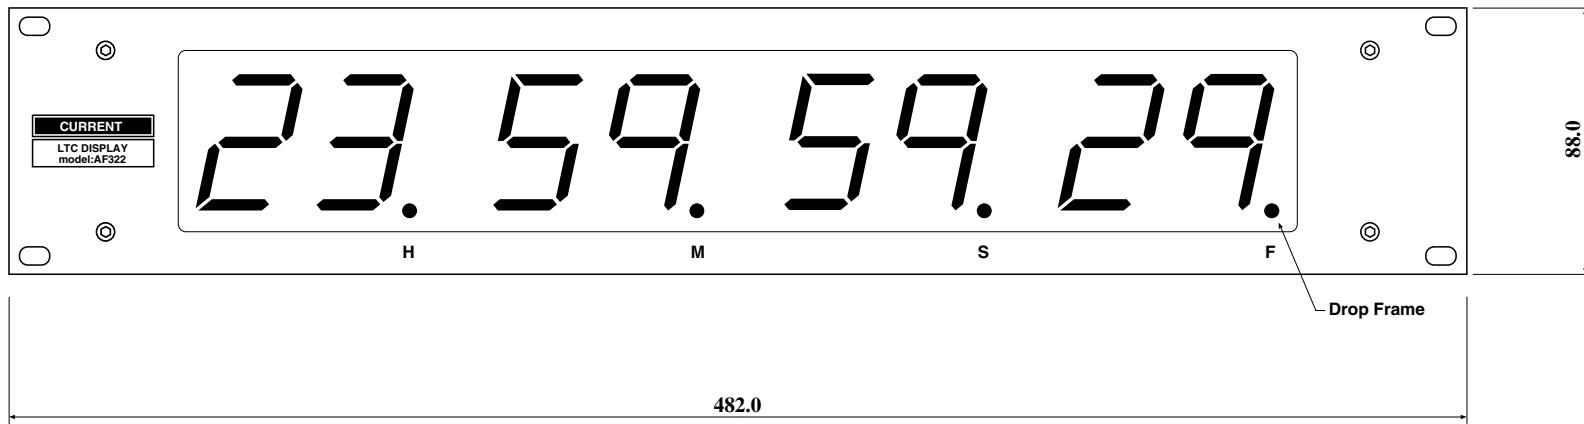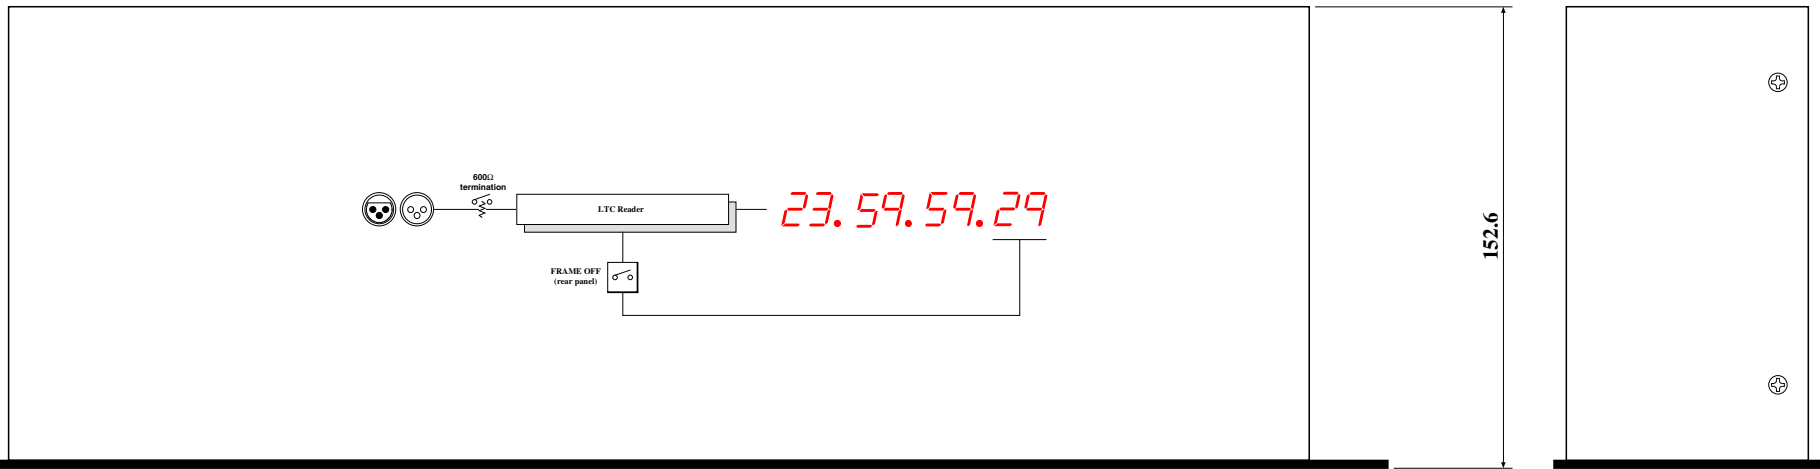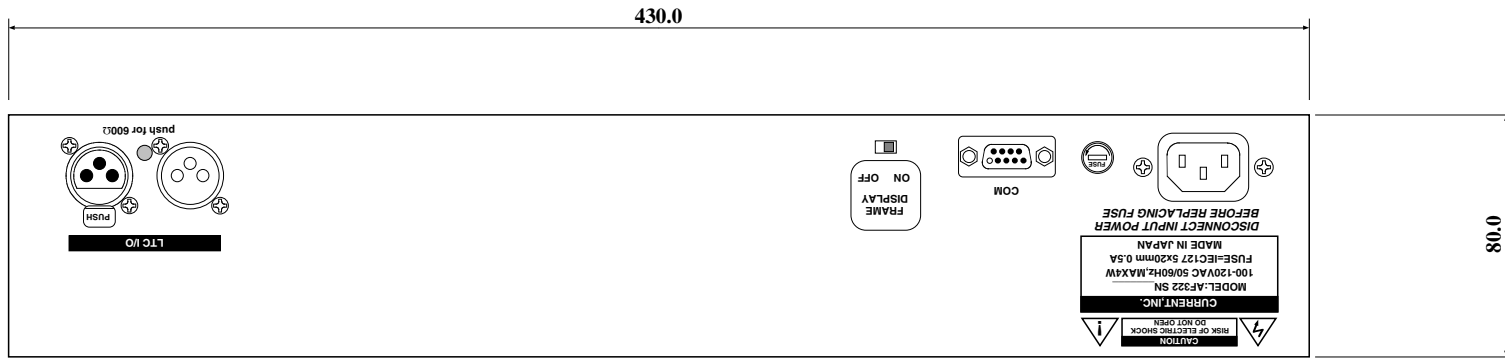

Oct.2023  
Feb.2017

(c)CURRENT,INC.	LTC DISPLAY AF322	Apr.2003
H.ICHIHASHI	PANEL DIAGRAM	AF322-D2023

Oct.2023 add detail size  
Feb.2017 add frame off switch