


CURRENT PRODUCTS model:CSP104

PROGRAM METER

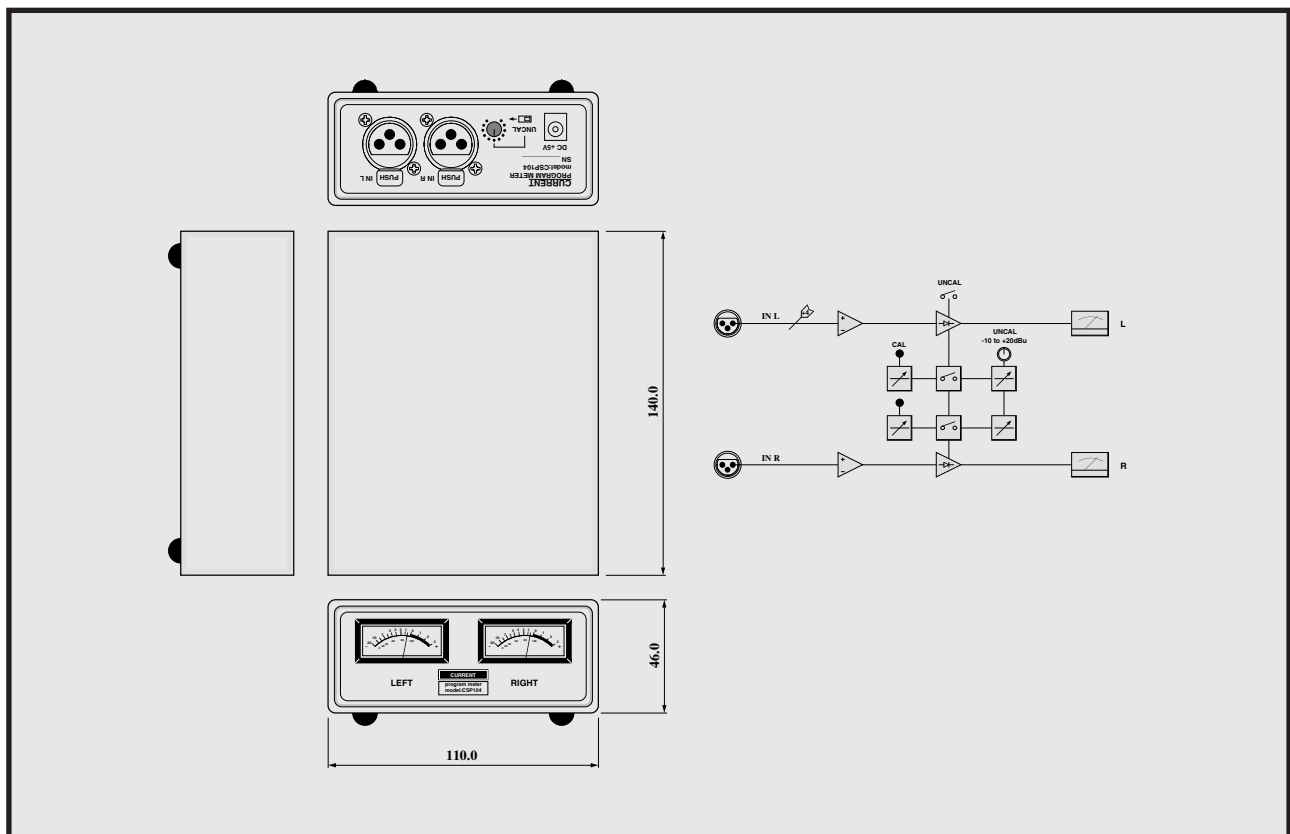

Stereo VU meter
 XLR balanced input
 Mini size VU meter mounting
 Supports -10 to +20 dBu standard level
 With inseparable lighting
 Compact size

CSP104 is a VU meter box that uses a mini-sized meter unit.
The balanced XLR connector input enables a reliable level check when connecting to professional equipment.

VU

The factory has been set to 0VU = +4dBu, but when to ON the UNCAL switch of the rear panel, can be changed in the range of -10dBu ~ +20dBu.



Input

The input of CSP104 is an XLR 3-pin type female connector. Moreover, the influence on connected equipment is reduced by making the input impedance of 100kΩ or more.

SPECIFICATIONS

- 🍏 **INPUTS:** BALANCED
- 🍏 **INPUT IMPEDANCE:** >100kΩ
- 🍏 **INPUT CONNECTOR:** XLR3-F x2
- 🍏 **REFERENCE LEVEL:** +4dBu, MAX=+24dBu
- 🍏 **FREQUENCY RESPONSE:** 20~20kHz +0.1dB, -3dB
- 🍏 **UNCAL ADJUST:** -10dBu~+20dBu ON REAR PANEL
- 🍏 **METER LAMP:** AMBER LED
- 🍏 **POWER:** DC5V 0.5W
- 🍏 **DIMENSIONS:** 110Wx46Hx146D, 0.5kg

Order number: CSP104 ¥32,000
 accessory : +5V Power supply wall adaptor

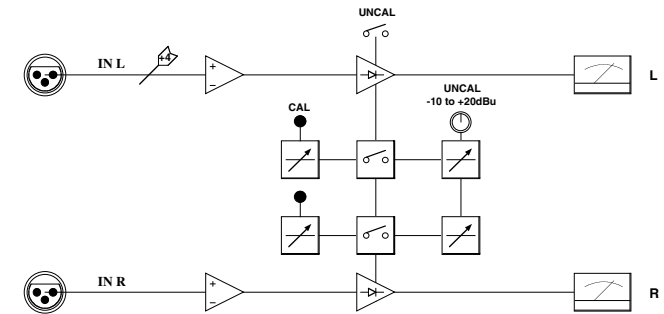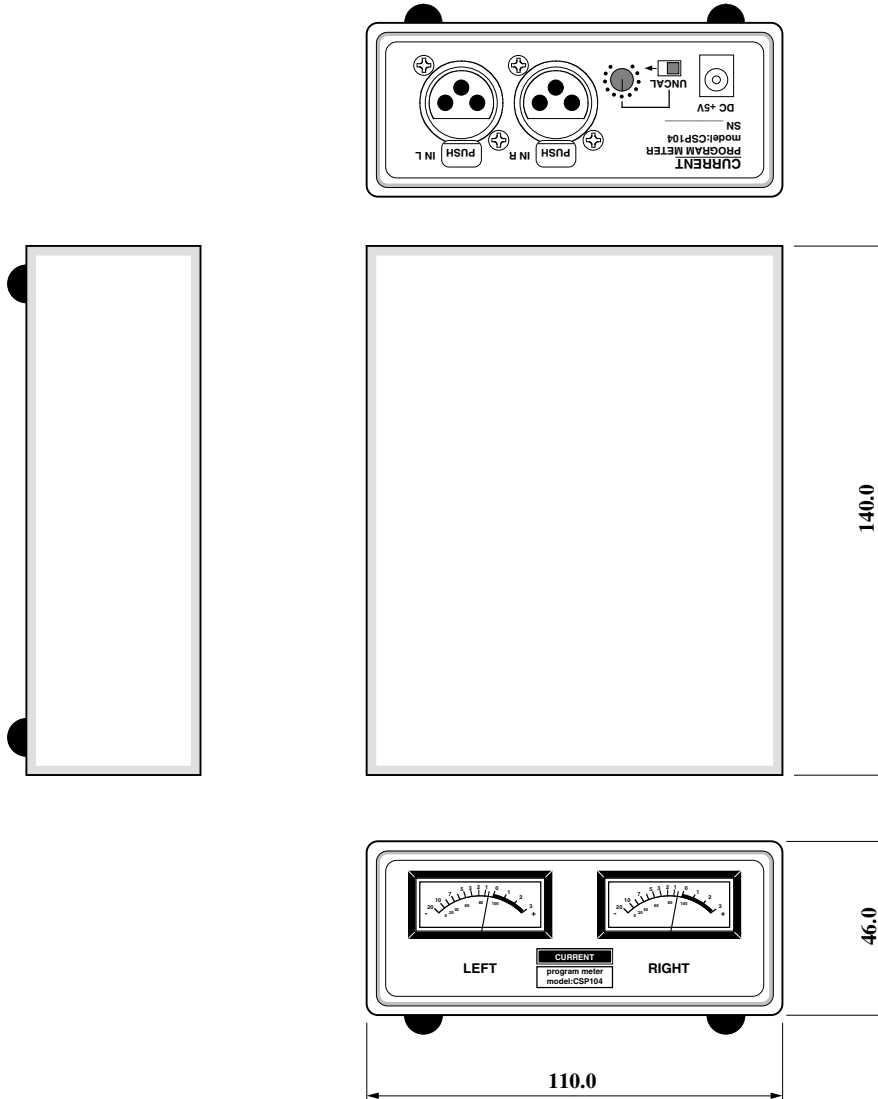

Aug.2020

(c)CURRENT,INC.	CSP104 PROGRAM METER	Mar.2016
H.ICHIHASHI	PANEL DIAGRAM	CSP104-D rev4