


# CURRENT PRODUCTS model:CSP192

## Powered10M

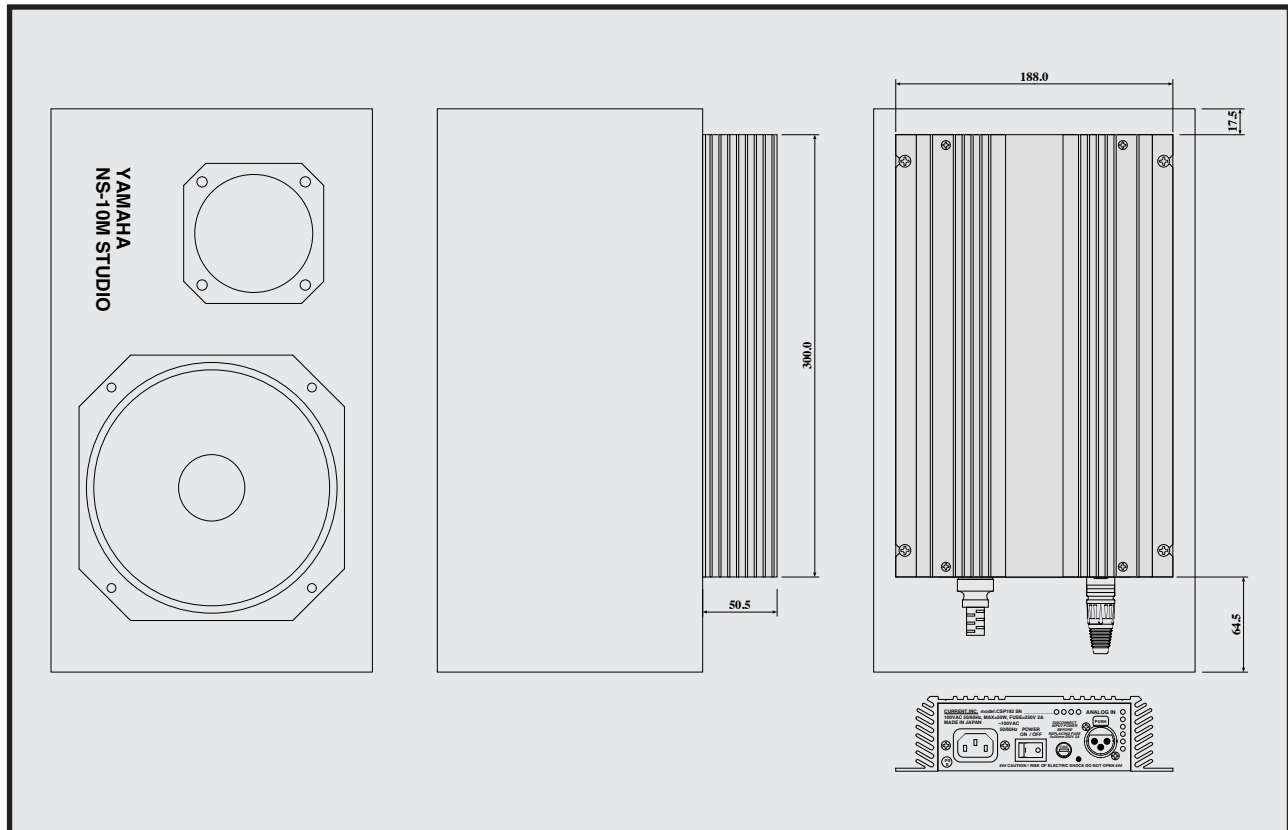

Powered 10M was not likely  
NS-10M to powered  
Easy installation

*CSP192 is the power amp unit which can change NS-10M (STUDIO) into a powered monitor. Though it loves it, it is a reason to be inconvenient to use power amp extra and is most suitable for you who compromise with an unwilling powered monitor. With an amplifier performed special tuning of with forever 10M sound.*

### "Input"

The XLR connector of the balanced input does not depend on the setting environment. It can use even unbalance by using a conversion adapter in the case of RCA.

### "Installation"

It is the easy installation that it connects an output cable to the speaker terminal, and only fixes a main frame with 4 wood screws. If speaker size is compatible not only 10M, it can attach any speaker.

### "Amplifier"

As for the power amp of the BTL connection, input and output is a discrete circuit using the Power MOS-FET of complete balance specifications. Moreover, the power supply transformer using large toroidal core supplies clean power having margin.



### SPECIFICATIONS

- 🍏 **AUDIO INPUT:** BALANCED, 3kΩ
- 🍏 **CONNECTOR:** XLR3-F
- 🍏 **GAIN:** +24dB
- 🍏 **SENSITIVITY:** 1.4V
- 🍏 **FREQ.RESPONSE:** 10 to 20kHz ±0.1dB
- 🍏 **THD:** <0.01% at 8Ω 1W    🍏 **EIN:** <-110dB
- 🍏 **CONTINUOUS POWER:** 30W (8Ω, THD < 0.1%)
- 🍏 **PEAK POWER:** 50W (20ms Burst)
- 🍏 **PROTECTION:** Power on mute, DC Detection ±3V
- 🍏 **MAINS:** 100VAC 50/60Hz MAX 50W
- 🍏 **DIMENSIONS:** 188Wx51Hx300D, 2.5kg

Powered 10M (pair) CSP192      ¥198,000

accessory : AC cable

The specifications are subject to change without notice.  
2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN