


CURRENT PRODUCTS model:CSP352 SUPER MONITOR

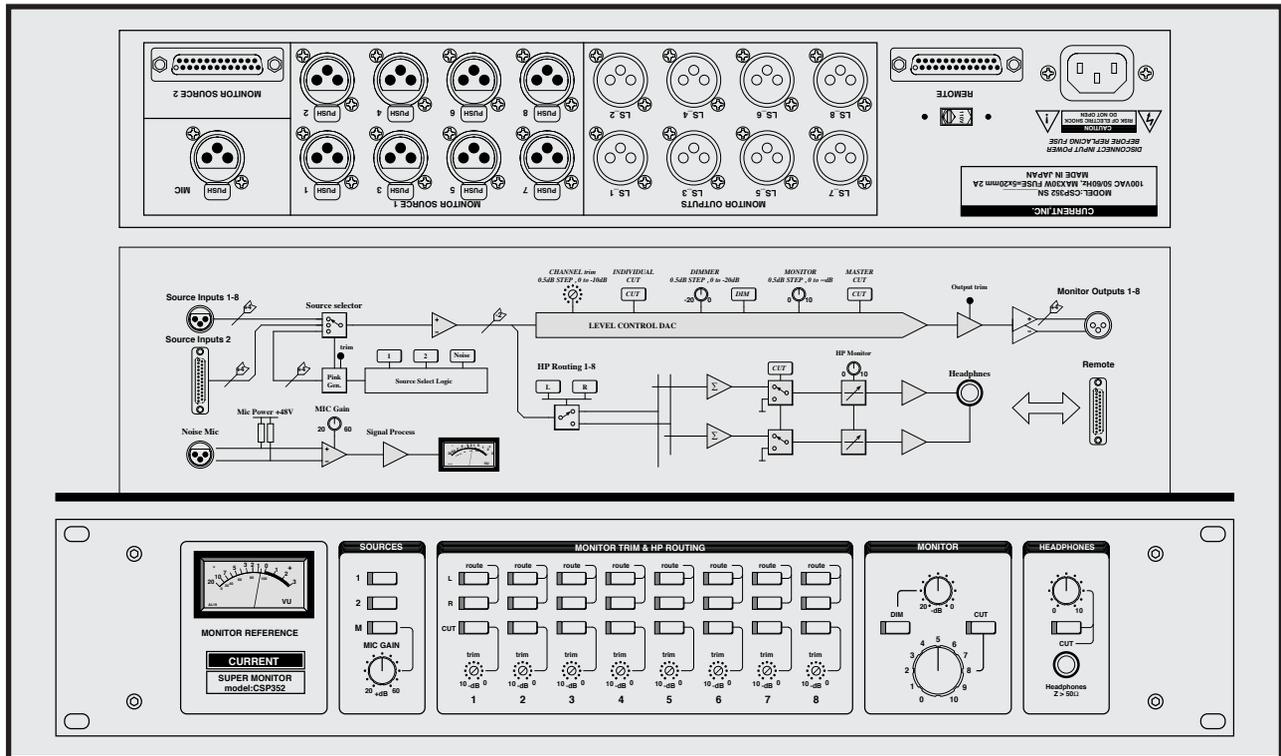

8ch monitor of 2 systems
 Super low noise
 Broadband more than 100kHz
 Pink noise generator for level adjustment
 Level control without the tracking error
 Headphone monitor
 Remote control
 19 inches 2U size

CSP352 is a monitor unit of 8ch specifications to support DVD, broadband of DSD. It realized the super high-performance rial acoustic monitor which there was not at all of the coloring by making simple configuration with the parts of the highest grade. It realized accurate 0.5dB step attenuation and high SN, low distortion, wide dynamic range by having adopted a tip for exclusive use of a thing of a digital control method.

"Monitor"

It can set 1-8 monitor trims by 0.5dB step precisely in the range of 0 to -10dB. CUT can also do each channel by independence. The monitor level can control 1-8 without tracking error. As for the DIM level, setting of 0 to -20dB is possible. The monitor source has 2 systems of XLR and Dsub25-F.

"Headphone"

Monitor source 1-8 can perform routing of each to a headphone monitor bus of the L and R by independence. When both turn it on, it is mixed mono, and, as for the level, 3dB decreases.

"Pink noise"

For the adjustment of each monitor level, it has implemented a pink noise generator and a microphone amplifier and a VU meter for level confir-

mation.

"Remote"

It can control the CUT switch of each monitor, a monitor, the DIM level in parallel from the outside.




SPECIFICATIONS


- ▲MONITOR INPUTS 1: 8, XLR3-F
- ▲MONITOR INPUTS 2: 8, Dsub25-F(#4-40)
- ▲ALL INPUTS IMPEDANCE : 24kΩ, REF=+4dBu MAX=+24dBu
- ▲ALL OUTPUTS IMPEDANCE: 50Ω, REF=+4dBu MAX=+24dBu
- ▲MONITOR TRIM: 0 ~ -10dB
- ▲MONITOR ATT: 0.5dB STEP 0 ~ -95.5dB ~ ∞
- ▲DIM ATT: 0.5dB STEP 0 ~ -20dB
- ▲FREQUENCY RESPONSE: 20~100kHz ±0.1dB
- ▲HP MONITOR: STEREO, > 50Ω, 500mW
- ▲NOISE OUTPUT: PINK NOISE
- ▲MIC INPUT: 1.4kΩ, +20~-+60dB
- ▲THD: < 0.01% at 1kHz, REF LEVEL (20~20kHz unweighted)
- ▲NOISE: < -90dBu (20~20kHz unweighted)
- ▲REMOTE CONNECTOR: 8, Dsub25-F(#4-40)
- ▲MAINS: 100-240VAC 50/60Hz, MAX 50W
- ▲DIMENSIONS: 482Wx88Hx302D, 5kg

Super Monitor	CSP352	¥960,000
accessory : AC cable		

The specifications are subject to change without notice.
 2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

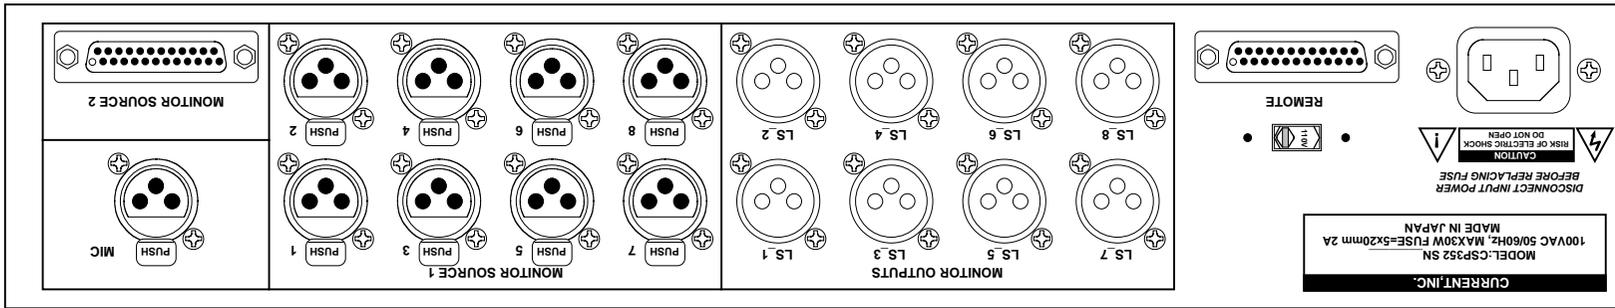

302.6

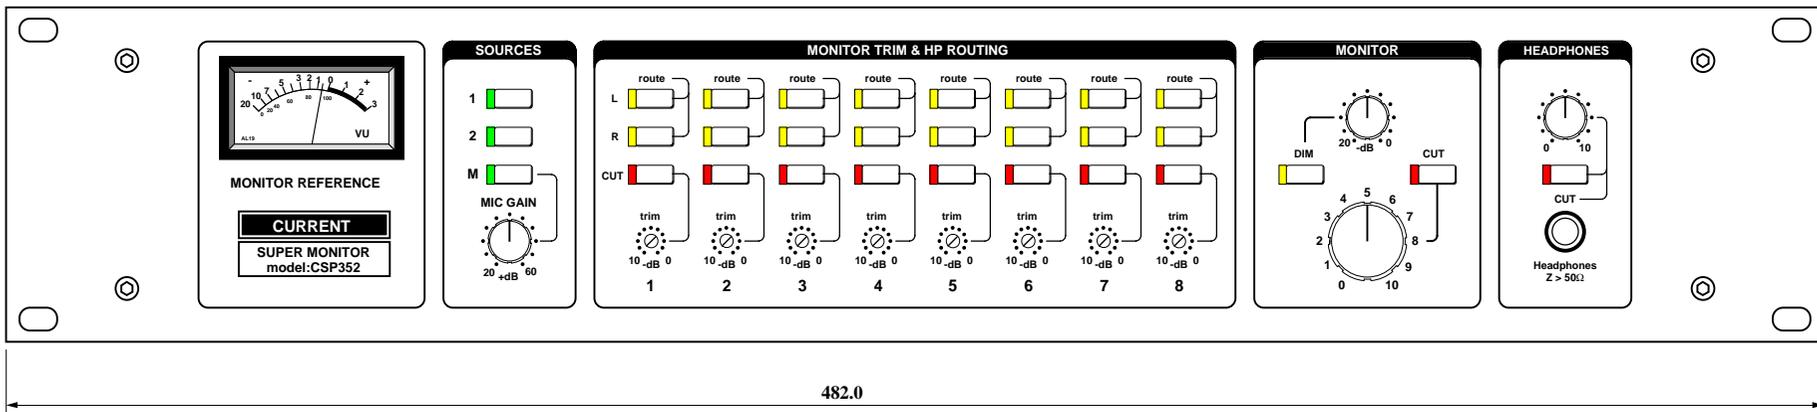


(c)CURRENT, INC.	SUPER MONITOR CSP352	Feb.2003
H.ICHIHASHI	PANEL DIAGRAM	CSP352-D

Source Inputs 1




Source selector

CHANNEL trim
0.5dB STEP, 0 to -10dB
INDIVIDUAL CUT
CUT
DIMMER
0.5dB STEP, 0 to -20dB
DIM
MONITOR
0.5dB STEP, 0 to -dB
CUT
MASTER CUT
CUT


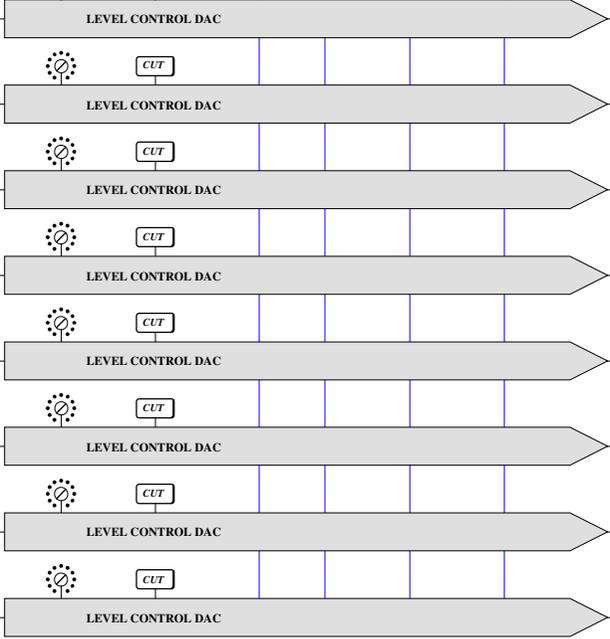


Output trim


Monitor Outputs

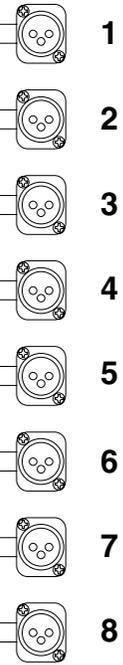

Source Inputs 2




trim
Pink Gen.

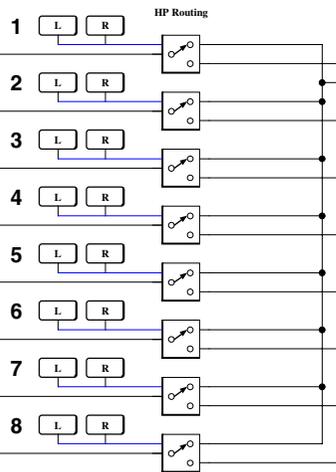


HP Monitor

Headphones

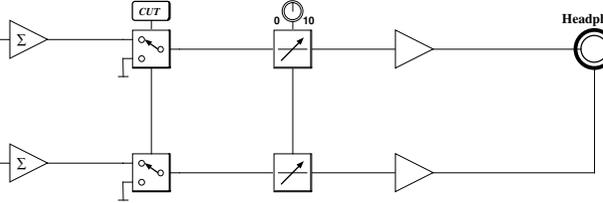

Remote





Mic Power +48V

MIC Gain
20 60

Signal Process

Noise Mic



(c)CURRENT, INC.	SUPER MONITOR CSP352	Mar.2003
H.ICHIHASHI	SYSTEM DIAGRAM	CSP352-B