


CURRENT PRODUCTS model:GPS708

VTR SYSTEM SWITCHER

REAR PANEL

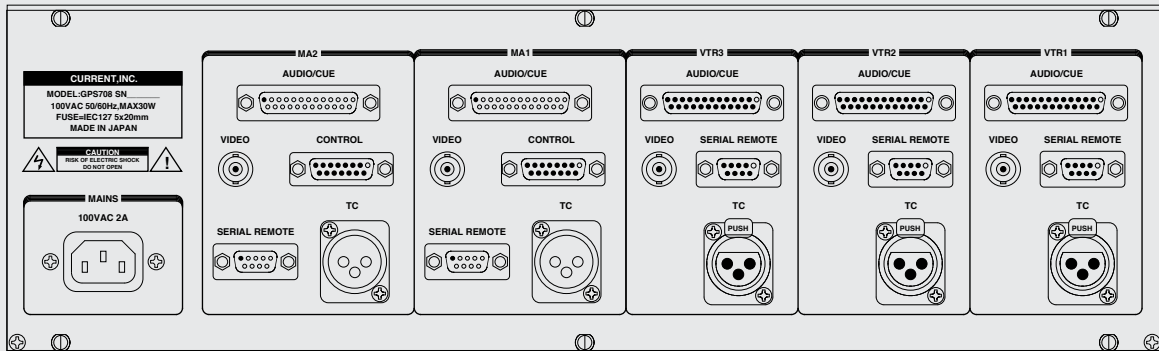

- 2 : 3 のシステムスイッチャー
- 9 P リモート切換
- オーディオ 8 c h 切換
- ビデオ切換
- タイムコード切換
- 1 9 インチ 3 U

GPS708は2つのコントロールルームで、3台のVTRを共用するためのシステムスイッチャーで、9Pリモート、8系統のオーディオ、1系統のビデオ、タイムコードの切換が可能です。

◆スイッチング

GPS708の信号切換はリレーによる全ピン切換ですので接続する機種及び信号を選ばません。また、スイッチングによるノイズもなく、シグナルロスもほとんど無視できます。

◆コントロール

GPS708の切換コントロールは、外部のスイッチパネル等からリモートコントロールで行うのが標準仕様ですが、オプションで本体フロントパネルにスイッチを取り付けることも出来ます。

◆排他処理

GPS708は先取り優先で、片方の部屋で選ばれているVTRは、その部屋が選択を解除しなければもう一方では選ぶことが出来ません。各部屋へのリモートコネクターには自分自身のスイッチとタリー及び、相手が選んでいる場合のタリーを出力しています。

◆その他

異なる仕様のシステムスイッチャーにもお応えしますのでお問い合わせください。

SPECIFICATIONS

- VTR 1,2,3 AUDIO: Dsub25-F(#4-40)
- VTR 1,2,3 9P REMOTE: Dsub9-F(#4-40)
- VTR 1,2,3 VIDEO: BNC 75Ω
- VTR 1,2,3 TC: XLR3-F
- CONTROL ROOM AUDIO: Dsub25-M(#4-40)
- CONTROL ROOM 9P REMOTE: Dsub9-M(#4-40)
- CONTROL ROOM VIDEO: BNC 75Ω
- CONTROL ROOM TC: XLR3-M
- CONTROL ROOM REMOTE: Dsub25-F(#4-40)
- CONTROL REMOTE TALLY: COMMON=+5VDC
- MAINS: 100VAC 50/60Hz, MAX=50W
- DIMENSIONS: 483Wx132.5Hx350D、8kg

御注文型番: GPS708
標準価格: ¥720,000(税別)
付属品: ACケーブル

CURRENT,INC. 2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN
株式会社カレント 〒156-0044 東京都世田谷区赤堤2-26-11 TEL:81-3-3321-9559 FAX:81-3-5376-2735

The specifications are subject to change without notice. 記載内容は予告なく変更することがありますのであらかじめご了承ください。

GPS708 "MA1/2 CONTROL" Dsub15-F(#4-40)

Ribbon	Hard	Signal name	Designation	Active
1	1	SW COM	SWITCHES COMMON	0V
2	9	LP COM	LAMPS COMMON	+5V DC
3	2	SW1-1	VTR-1 SELECT SWITCH for MA-1	Lo
4	10	LP1-1	VTR-1 SELECTED TALLY for MA-1 MAX=50mA	Lo (O.C.)
5	3	SW1-2	VTR-2 SELECT SWITCH for MA-1	Lo
6	11	LP1-2	VTR-2 SELECTED TALLY for MA-1 MAX=50mA	Lo (O.C.)
7	4	SW1-3	VTR-3 SELECT SWITCH for MA-1	Lo
8	12	LP1-3	VTR-3 SELECTED TALLY for MA-1 MAX=50mA	Lo (O.C.)
9	5	SW2-1	VTR-1 SELECT SWITCH for MA-2	Lo
10	13	LP2-1	VTR-1 SELECTED TALLY for MA-2 MAX=50mA	Lo (O.C.)
11	6	SW2-2	VTR-2 SELECT SWITCH for MA-2	Lo
12	14	LP2-2	VTR-2 SELECTED TALLY for MA-2 MAX=50mA	Lo (O.C.)
13	7	SW2-3	VTR-3 SELECT SWITCH for MA-2	Lo
14	15	LP2-3	VTR-3 SELECTED TALLY for MA-2 MAX=50mA	Lo (O.C.)
15	8	NC	No CONNECTION	

注意！ Dサブコネクタの接続はHardピン番号で接続してください。

CAUTION! D-Connector for wiring refer to Hard pin number Description.

Mounting screw for D-connector use #4-40 screw.

GPS708 "MA1/2 AUDIO/CUE" Dsub25-M(#4-40)

Ribbon	Hard	Signal name	Designation	Active
1	1	AUDIO 1+	AUDIO LINE 1 +	
2	14	AUDIO 1-	AUDIO LINE 1 -	
3	2	AUDIO 1G	AUDIO LINE 1 GND	
4	15	AUDIO 2+	AUDIO LINE 2 +	
5	3	AUDIO 2-	AUDIO LINE 2 -	
6	16	AUDIO 2G	AUDIO LINE 2 GND	
7	4	AUDIO 3+	AUDIO LINE 3 +	
8	17	AUDIO 3-	AUDIO LINE 3 -	
9	5	AUDIO 3G	AUDIO LINE 3 GND	
10	18	AUDIO 4+	AUDIO LINE 4 +	
11	6	AUDIO 4-	AUDIO LINE 4 -	
12	19	AUDIO 4G	AUDIO LINE 4 GND	
13	7	AUDIO 5+	AUDIO LINE 5 +	
14	20	AUDIO 5-	AUDIO LINE 5 -	
15	8	AUDIO 5G	AUDIO LINE 5 GND	
16	21	AUDIO 6+	AUDIO LINE 6 +	
17	9	AUDIO 6-	AUDIO LINE 6 -	
18	22	AUDIO 6G	AUDIO LINE 6 GND	
19	10	AUDIO 7+	AUDIO LINE 7 +	
20	23	AUDIO 7-	AUDIO LINE 7 -	
21	11	AUDIO 7G	AUDIO LINE 7 GND	
22	24	AUDIO 8+	AUDIO LINE 8 +	
23	12	AUDIO 8-	AUDIO LINE 8 -	
24	25	AUDIO 8G	AUDIO LINE 8 GND	
25	13	NC	No Connection	

GPS708 "MA1/2 Serial REMOTE" Dsub9-M(#4-40)

1	1	S-1	GND	
2	6	S-2	GND	
3	2	S-3	TX-B	
4	7	S-4	TX-A	
5	3	S-5	RX-A	
6	8	S-6	RX-B	
7	4	S-7	GND	
8	9	S-8	GND	
9	5	S-9	SPARE LINE	

注意！ Dサブコネクタの接続はHardピン番号で接続してください。

CAUTION! D-Connector for wiring refer to Hard pin number Description.

Mounting screw for D-connector use #4-40 screw.

GPS708 "VTR 1-3 AUDIO/CUE" Dsub25-F(#4-40)

Ribbon	Hard	Signal name	Designation	Active
1	1	AUDIO 1+	AUDIO LINE 1 +	
2	14	AUDIO 1-	AUDIO LINE 1 -	
3	2	AUDIO 1G	AUDIO LINE 1 GND	
4	15	AUDIO 2+	AUDIO LINE 2 +	
5	3	AUDIO 2-	AUDIO LINE 2 -	
6	16	AUDIO 2G	AUDIO LINE 2 GND	
7	4	AUDIO 3+	AUDIO LINE 3 +	
8	17	AUDIO 3-	AUDIO LINE 3 -	
9	5	AUDIO 3G	AUDIO LINE 3 GND	
10	18	AUDIO 4+	AUDIO LINE 4 +	
11	6	AUDIO 4-	AUDIO LINE 4 -	
12	19	AUDIO 4G	AUDIO LINE 4 GND	
13	7	AUDIO 5+	AUDIO LINE 5 +	
14	20	AUDIO 5-	AUDIO LINE 5 -	
15	8	AUDIO 5G	AUDIO LINE 5 GND	
16	21	AUDIO 6+	AUDIO LINE 6 +	
17	9	AUDIO 6-	AUDIO LINE 6 -	
18	22	AUDIO 6G	AUDIO LINE 6 GND	
19	10	AUDIO 7+	AUDIO LINE 7 +	
20	23	AUDIO 7-	AUDIO LINE 7 -	
21	11	AUDIO 7G	AUDIO LINE 7 GND	
22	24	AUDIO 8+	AUDIO LINE 8 +	
23	12	AUDIO 8-	AUDIO LINE 8 -	
24	25	AUDIO 8G	AUDIO LINE 8 GND	
25	13	NC	No Connection	

GPS708 "VTR 1-3 Serial Remote" Dsub9-F(#4-40)

1	1	S-1	GND	
2	6	S-2	GND	
3	2	S-3	TX-B	
4	7	S-4	TX-A	
5	3	S-5	RX-A	
6	8	S-6	RX-B	
7	4	S-7	GND	
8	9	S-8	GND	
9	5	S-9	SPARE LINE	

注意！ Dサブコネクタの接続はHardピン番号で接続してください。

CAUTION! D-Connector for wiring refer to Hard pin number Description.

Mounting screw for D-connector use #4-40 screw.