


CURRENT PRODUCTS model:MP463

QUAD MONITOR UNIT

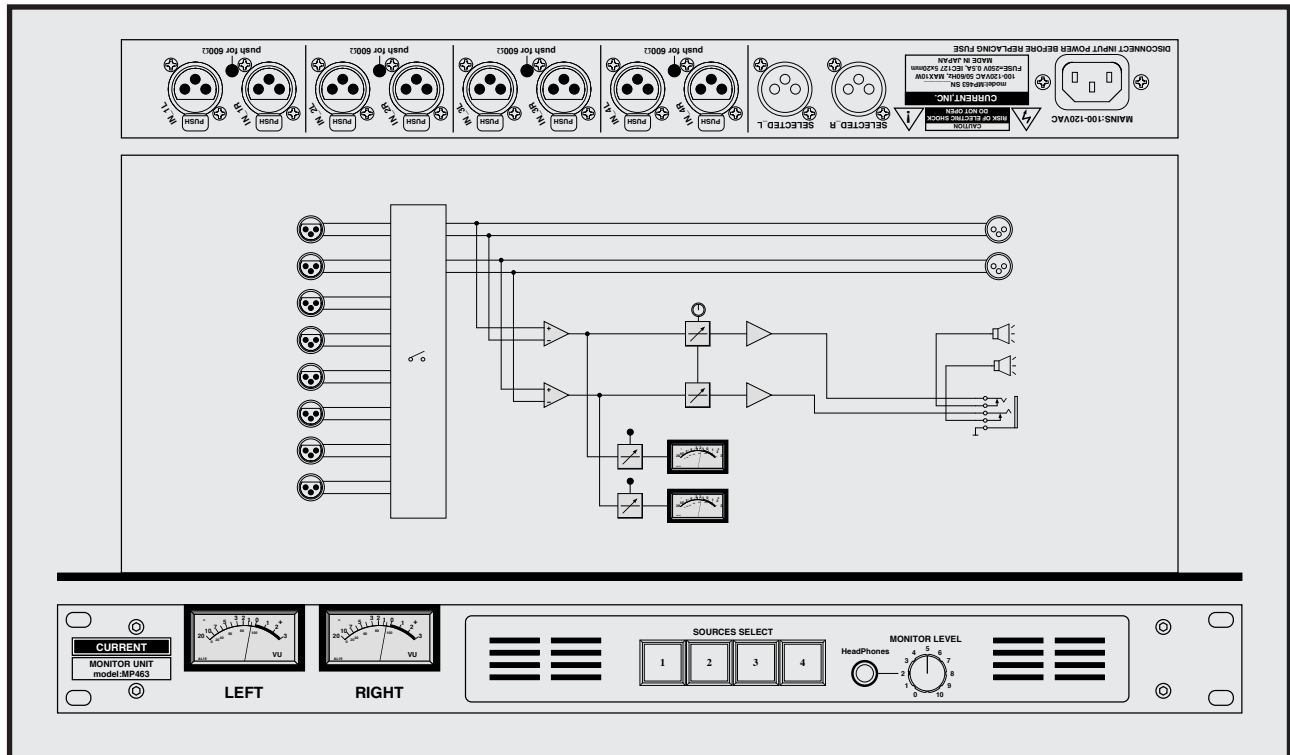

- Stereo speaker
- Stereo headphone
- VU meter
- High-quality sound
- Through output and variable output
- 600 Ω line support
- 19 inches of 1 U size

MP462A is a monitor unit with a speaker, headphone, a VU meter. It is most suitable for the monitor uses such as emergency broadcasting system, line monitor, the DAW monitor.

"Monitor"

A speaker is cut and is replaced by headphone when it places headphone while it monitors it with a speaker of MP462A.
The VU meter indicates an input signal regardless of a monitor level.

"Input-output"

The input and output connectors has been directly connected to, and the input signal is just output.
The circuit of the monitor section does not affect it for high impedance.

"Variable output"

It has had the variable output which linked a monitor level of the front panel other than the through output.
It can use this output for cases to use an external speaker.
It can link the cut switch by the setting of the internal switch.

"VU meter"

The standard reference level is +4dBu, but is changeable to a level of the others with an option. (at the time of an order)
The meter source can also choose input signal or the variable output with an internal switch.
It has been set in the input signal side at the time of the shipment.

"Others"

Please refer about the nonstandard specifications.





SPECIFICATIONS

- ♣ **INPUTS:** STEREO x4, BALANCED, 36kΩ / 600Ω (select on rear panel)
- ♣ **INPUT CONNECTOR:** XLR3-F
- ♣ **INPUTS REFERENCE LEVEL:** +4dBu, MAX=+24dBu
- ♣ **OUTPUTS:** BALANCED, 50Ω
- ♣ **OUTPUT CONNECTOR:** XLR3-M
- ♣ **OUTPUTS REFERENCE LEVEL:** +4dBu, MAX=+24dBu
- ♣ **FREQ.RESPONSE:** 20 to 20kHz ±0.1dB
- ♣ **THD:** <0.01% ♣ **EIN:** <-90dB
- ♣ **HEADPHONES:** >50Ω
- ♣ **MAXIMUM OUTPUT LEVEL** 500mW, <1%
- ♣ **MAINS:** 100~120VAC 50/60Hz MAX 15W
- ♣ **DIMENSIONS:** 482Wx444Hx303D, 4kg


Quad Monitor Unit	MP463	¥298,000
accessory : AC cable		

The specifications are subject to change without notice.
2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

MONITOR SYSTEM HEADPHONES AMP CUE SYSTEM COMMUNICATION T.R. COUGH SYSTEM MATRIX AMP AUDIO ROUTER AUDIO VIDEO SWITCHER SYSTEM SWITCHER EMERGENCY AUDIO VIDEO DISTRIBUTOR METER SYSTEM ANALOG, DIGITAL PREAMP MIXER LEVEL UNIT DIGITAL AUDIO FADER UNIT AUTO FADER TALLY FADER CLOCK TIMER EVENT SYSTEM SPECIAL PRODUCTS ETC.

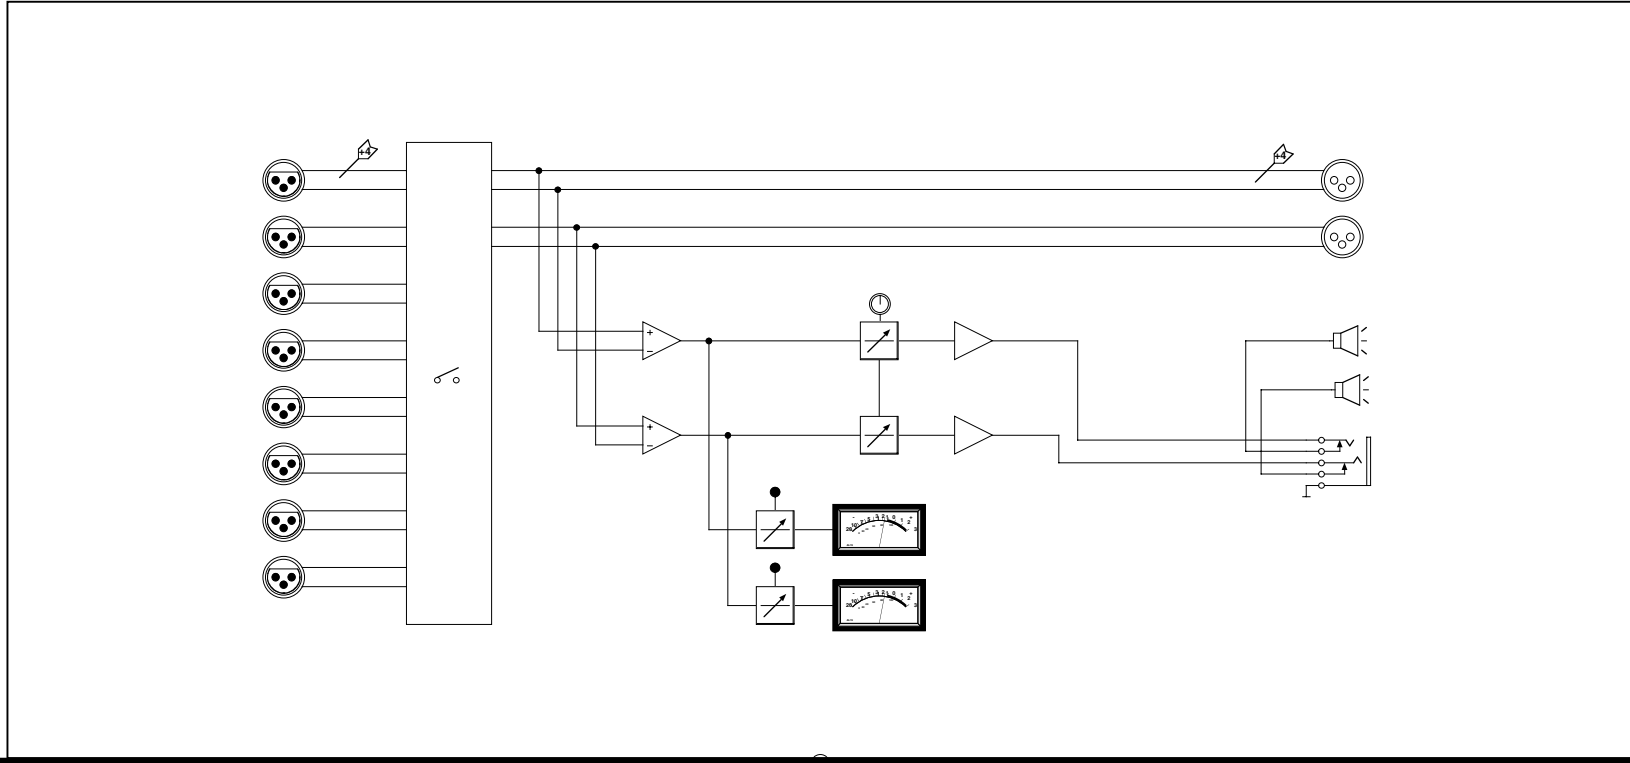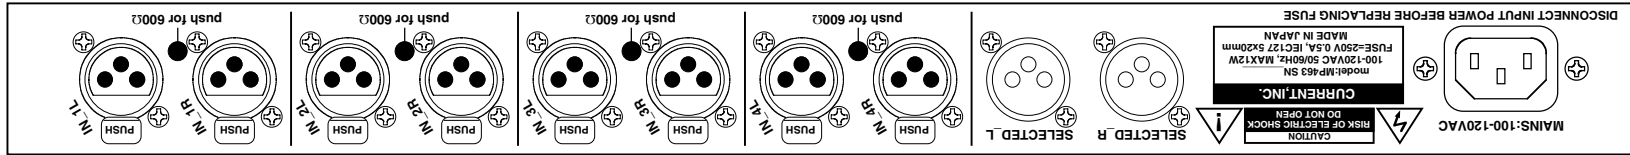

302.6

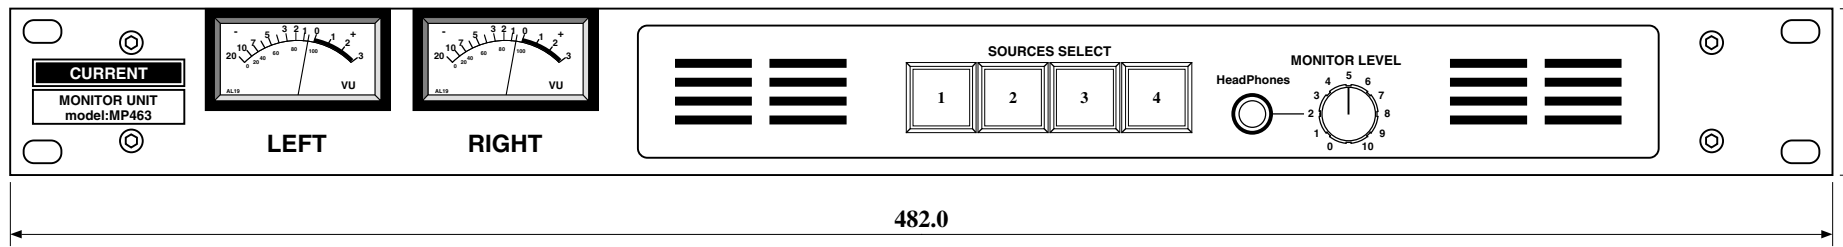

May.2006
Jan.2005

(c)CURRENT,INC.	MONITOR UNIT MP463	Aug.2001
H.ICHIHASHI	PANEL DIAGRAM	MP463-D2006