


CURRENT PRODUCTS model:SL905

TALLY GENERATOR

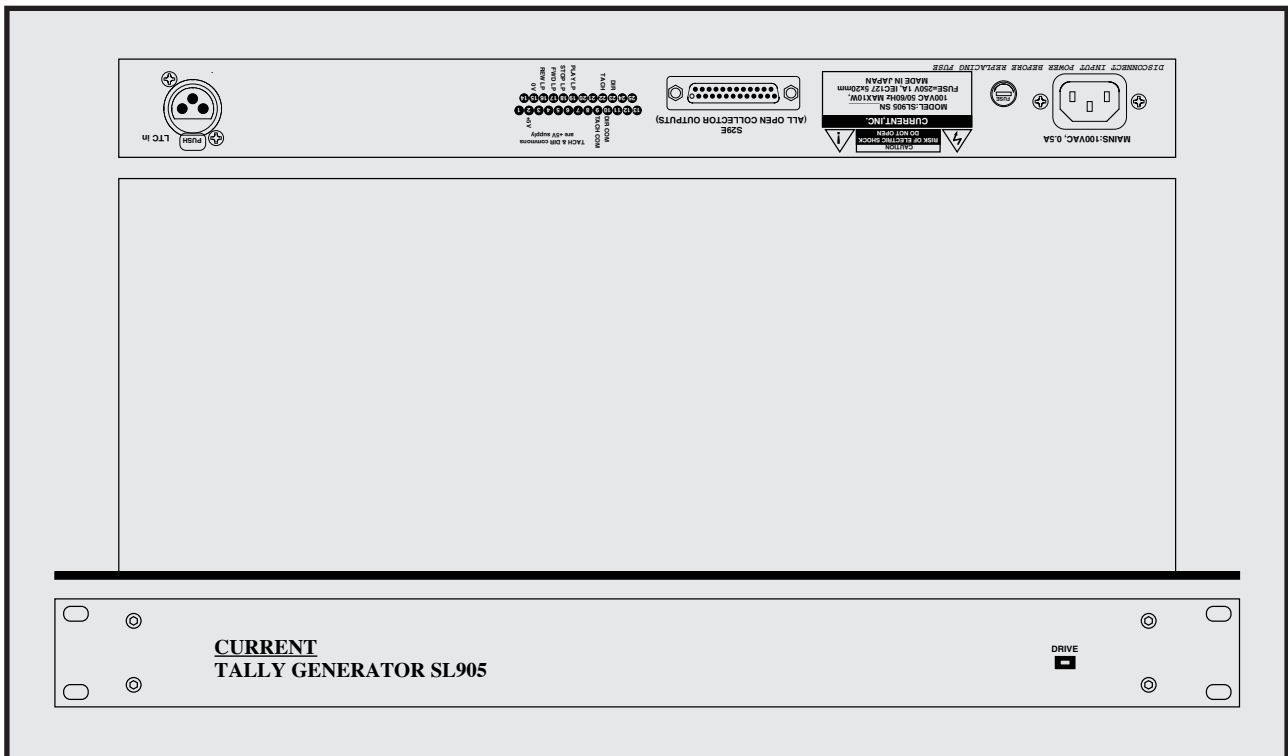

From LTC to SSL S29E

Various tally output

A tach pulse, the direction signal output it, too

From 1/20 to 60 double speed

It is most suitable for equipment without the parallel remote

Open collector output

19 inches 1U size

SL905 outputs REW, FWD, PLAY, a tally of STOP and a tach pulse and a direction signal from LTC timecode. When it wants to use the equipment which does not have parallel remote only with 9P serial remote by an existing system, it is most suitable.

"LTC input "

LTC input with an XLR3-F connector is readable from 1/20 to 60 double speed.

"Tally output"

The tallies of SL905 are output in Dsub25-F, but this format is based on the S29E format of the SSL console, and +5VDC for the common of the tally is output all with an open collector.

"Tach pulse"

The rate of a tach pulse output to S29E supports in a frame rate of LTC. For example, in the case of 30 frames, 30Hz is output.

"Others"




SL905 does not work with the model which does not output LTC in

REW, FWD with hard disk-based equipment such as DAW properly to create a tally and a tach pulse, direction signals from LTC.

SPECIFICATIONS

- 🍏 **LTC INPUT:** BALANCED, 10kΩ
- 🍏 **INPUTS CONNECTOR:** XLR3-F
- 🍏 **INPUTS REFERENCE LEVEL:** 0dBu
- 🍏 **MINIMUM INPUTS LEVEL:** -10dBu
- 🍏 **MAXIMUM INPUTS LEVEL:** +10dBu
- 🍏 **OUTPUT:** OPEN COLLECTOR MAX=24V
- 🍏 **TALLY COMMON:** +5VDC
- 🍏 **S29E I/F:** REW,FWD,PLAY,STOP TALLY,TACH,DIR
- 🍏 **MAINS:** 100VAC 50/60Hz MAX 10W
- 🍏 **DIMENSIONS:** 482Wx44Hx303D, 4kg

Tally generator	SL905	¥298,000
accessory : AC cable		

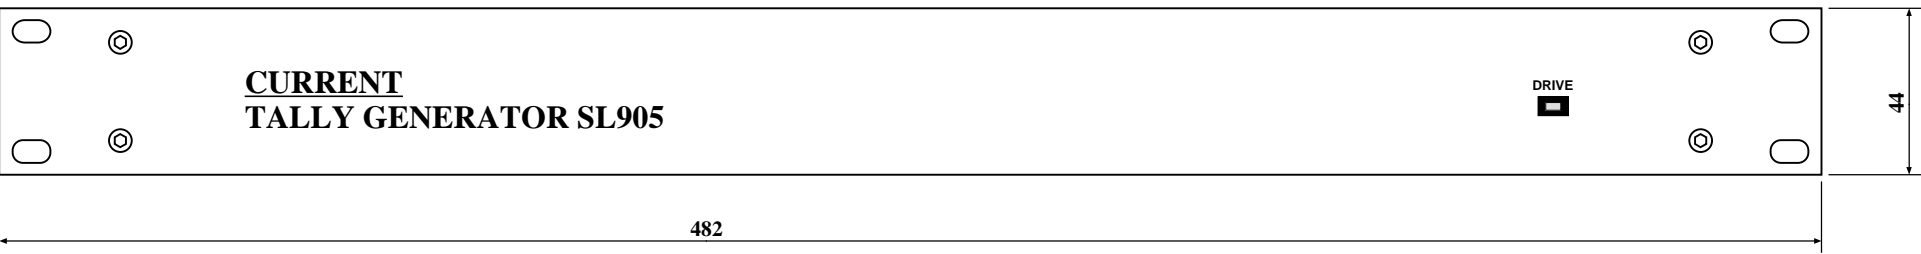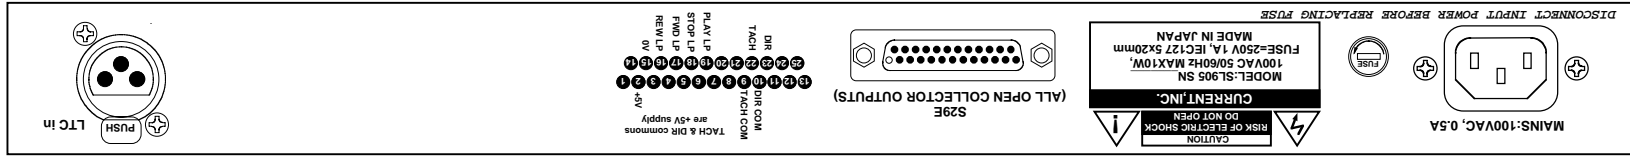

302.6

44

482

CURRENT, INC.	TALLY GENERATOR SL905	OCT. 99
HICHIHASHI	PANEL DIAGRAM	SL905-D

SL905 "S29E" Dsub25-F(#4-40)

Ribbon	Hard	Signal name	Designation	Active
1	1			
2	14			
3	2		LAMPS COMMON	+5V
4	15		SWITCHES COMMON	0V
5	3		REW SW	Lo
6	16		REW LP	Lo
7	4		FWD SW	Lo
8	17		FWD LP	Lo
9	5		STOP SW	Lo
10	18		STOP LP	Lo
11	6		PLAY SW	Lo
12	19		PLAY LP	Lo
13	7			
14	20			
15	8		REC SW	Lo
16	21		REC LP	Lo
17	9		TACH COM	
18	22		TACH	+5V
19	10		DIR COM	
20	23		DIR	+5V
21	11			
22	24			
23	12			
24	25			
25	13			

注意！ Dサブコネクタの接続はHardピン番号で接続してください。取付ビスは#4-40インチビスです。

CAUTION! D-Connector for wiring refer to Hard pin number Description. Mounting screw for D-connector use #4-40 size.