


CURRENT PRODUCTS model:TB123

TEL ASSIST2 REMOTE

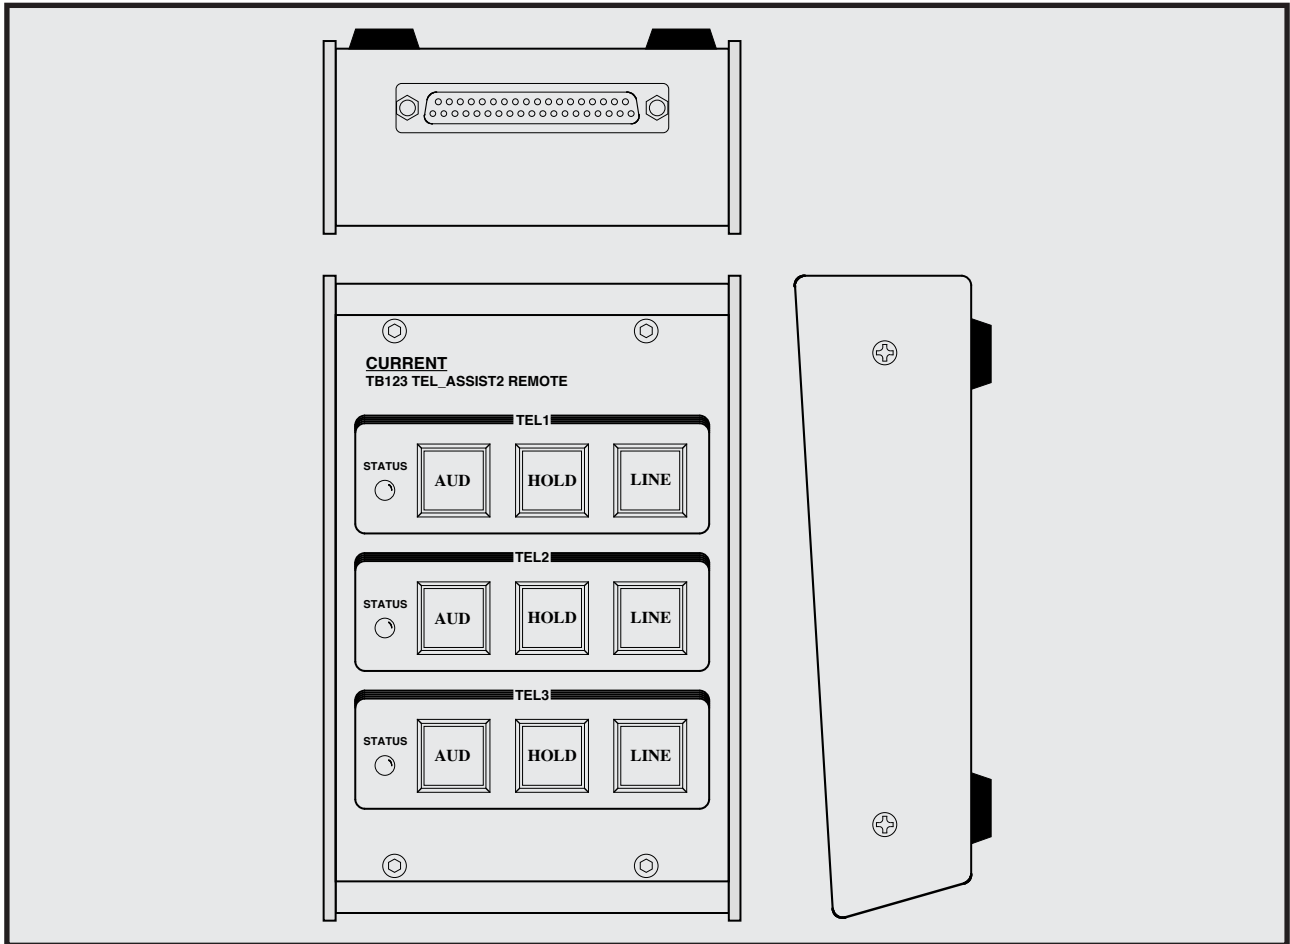

STUDER 'TEL-assist2' remote

3 line control
It is with a CALL lamp
A compact

It is mode Control Box of TEL-HY TB123 connects with STUDER TEL-assist2, and to use.

When I have a telephone, the STATUS lamp turns on. It can apply it to various apparatuses as a general-purpose remote box.

"Mode control"

Corresponding main body of TEL TEL-HY, HOLD, switch the name to STUDIO AUD, HOLD, the LINE.

"Others"

Please contact us to meet such changes or changes in the panel voltage tally, display button, also non-standard specifications.




Dsub37-M(#4-40)

1	AUD LP 1	20	AUD SW 1	2	HOLD LP 1
21	HOLD SW 1	3	LINE LP 1	22	LINE SW 1
4	STS LP 1	23	-----	5	-----
24	-----	6	AUD LP 2	25	AUD SW 2
7	HOLD LP 2	26	HOLD SW 2	8	LINE LP 2
27	LINE SW 2	9	STS LP 2	28	-----
10	-----	29	-----	11	AUD LP 3
30	AUD SW 3	12	HOLD LP 3	31	HOLD SW 3
13	LINE LP 3	32	LINE SW 3	14	STS LP 3
33	-----	15	-----	34	-----
16	LP COM	35	LP COM	17	SW COM
36	SW COM	18	-----	37	-----
19	-----				

SPECIFICATIONS

- ♣CONTROL: TEL-ASSIST2
- ♣CONNECTOR: D-37M (#4-40)
- ♣LAMP: 5V
- ♣DIMENSIONS: 106Wx49Hx164D, 0.8kg

Hybrid controller	TB123	¥120,000
Remote cable	TB123W05	¥58,000
	accessory : None	

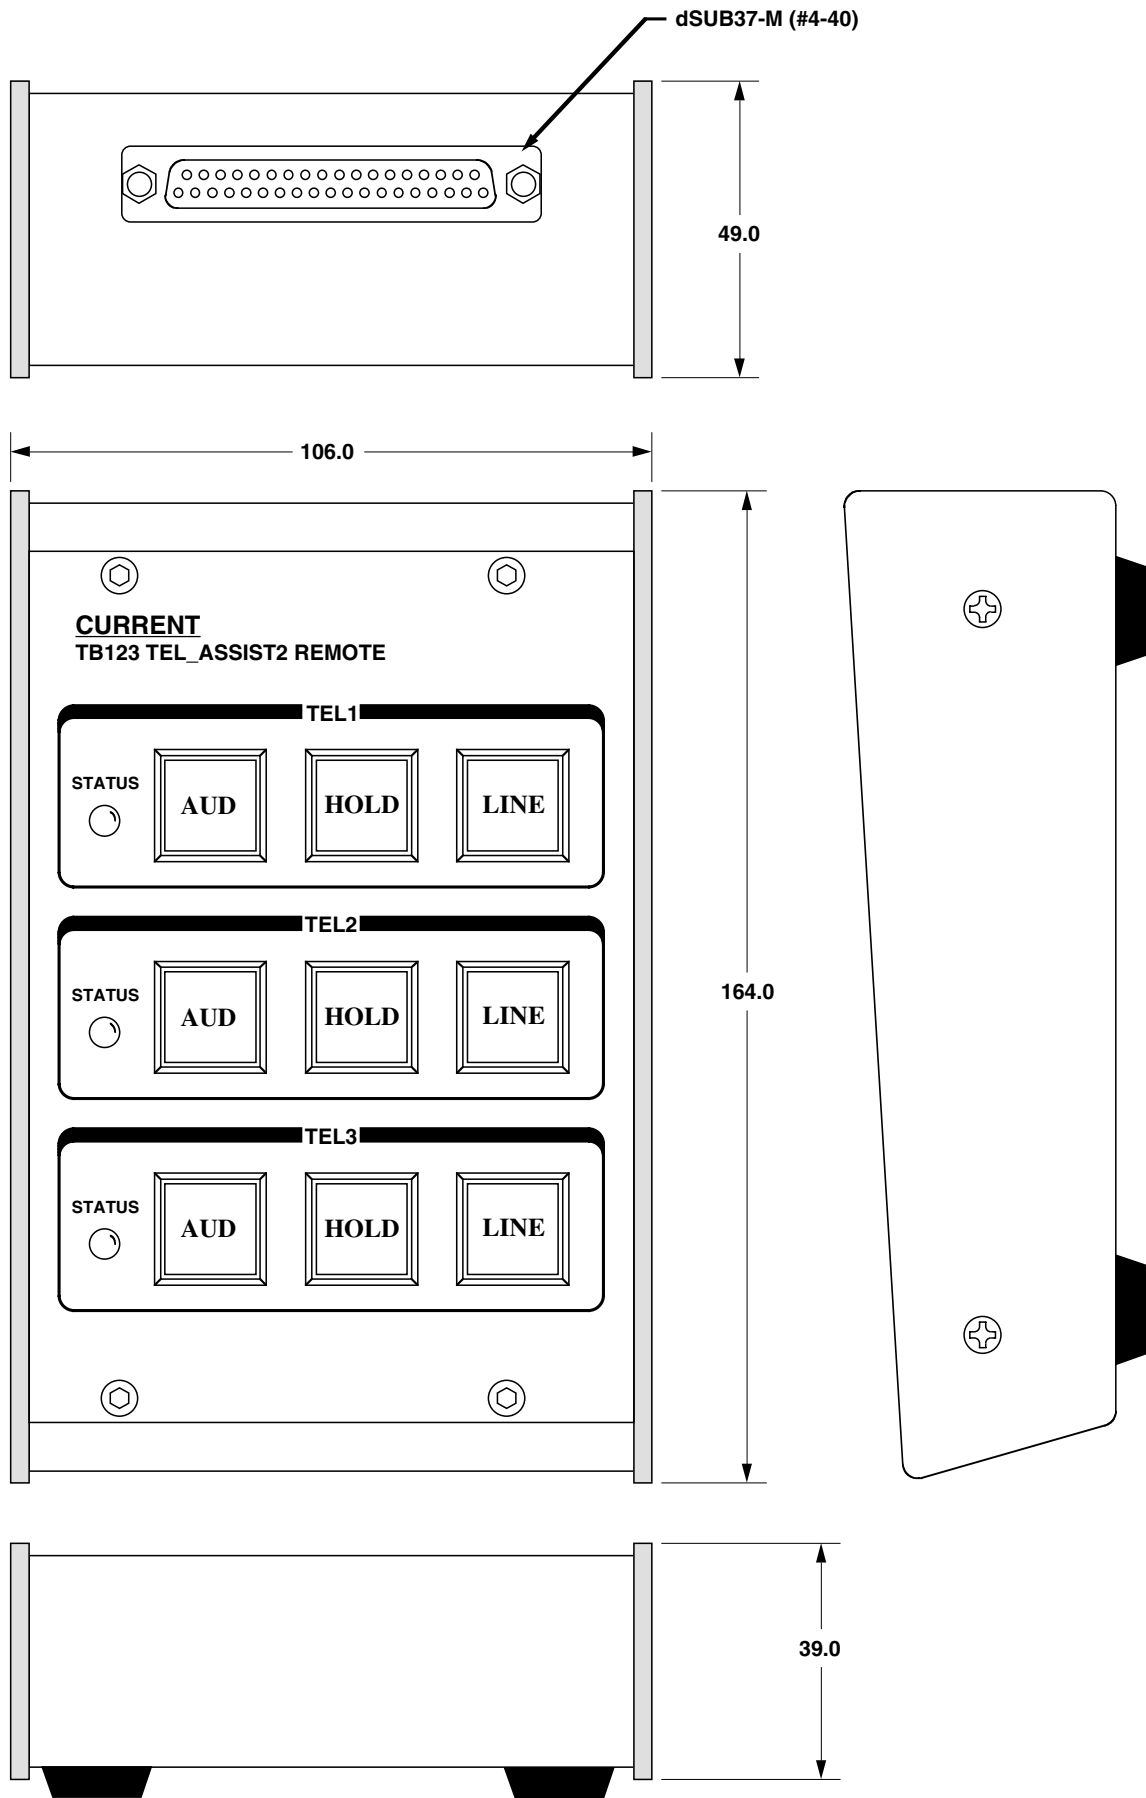

CURRENT,INC.	TB123	NOV 97
H.ICHIHASHI	PANEL DIAGRAM	TB123-D

"TB123" REMOTE D37-M(#4-40) Signal Pin list

Ribbon	Hard	Signal name	Designation
1	1	AUD LP 1	AUD LP 1
2	20	AUD SW 1	AUD SW 1
3	2	HOLD LP 1	HOLD LP 1
4	21	HOLD SW 1	HOLD SW 1
5	3	LINE LP 1	LINE LP 1
6	22	LINE SW 1	LINE SW 1
7	4	STS LP 1	STS LP 1
8	23	RING SW 1	UNUSED
9	5	RT LP 1-1	UNUSED
10	24	RT LP 1-2	UNUSED
11	6	AUD LP 2	AUD LP 2
12	25	AUD SW 2	AUD SW 2
13	7	HOLD LP 2	HOLD LP 2
14	26	HOLD SW 2	HOLD SW 2
15	8	LINE LP 2	LINE LP 2
16	27	LINE SW 2	LINE SW 2
17	9	STS LP 2	STS LP 2
18	28	RING SW 2	UNUSED
19	10	RT LP 2-1	UNUSED
20	29	RT LP 2-2	UNUSED
21	11	AUD LP 3	AUD LP 3
22	30	AUD SW 3	AUD SW 3
23	12	HOLD LP 3	HOLD LP 3
24	31	HOLD SW 3	HOLD SW 3
25	13	LINE LP 3	LINE LP 3
26	32	LINE SW 3	LINE SW 3
27	14	STS LP 3	STS LP 3
28	33	RING SW 3	UNUSED
29	15	RT LP 3-1	UNUSED
30	34	RT LP 3-2	UNUSED
31	16	LP COM	+5V LAMPS COMMON
32	35	LP COM	+5V LAMPS COMMON
33	17	SW COM	0V SWITCHES COMMON
34	36	SW COM	0V SWITCHES COMMON
35	18		
36	37		
37	19		

注意！ Dサブコネクタの接続はHARDピン番号でD-Connector for wiring refer to Hard pin number description.

CAUTION! D-Connector for wiring refer to Hard pin number Description. Mounting screw for D-connector use #4-40 size.

