


CURRENT PRODUCTS model:VC740

SURROUND PROGRAM METER

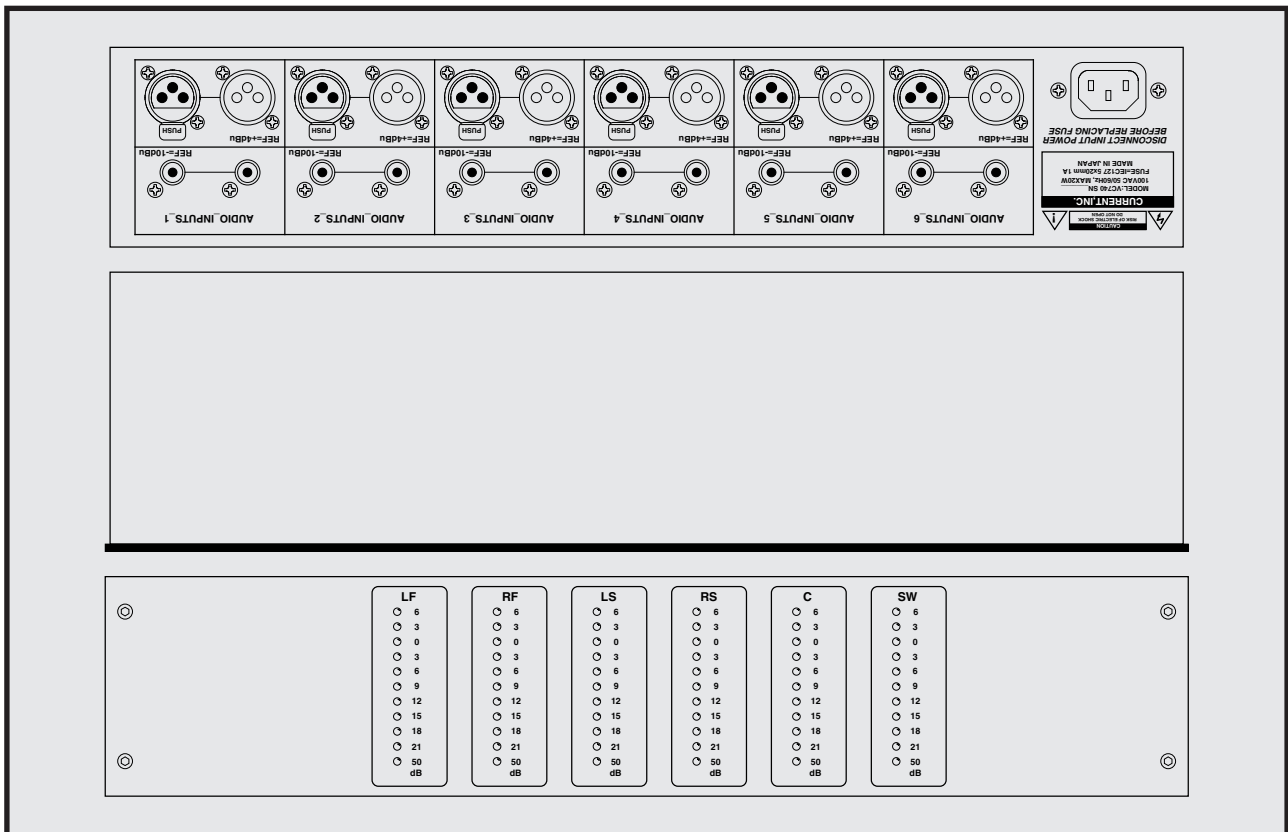

6ch meter
 XLR, RCA input
 Throughout
 High visibility
 19 inches 2U size

VC740 is 11 points of LED meters of 6ch for surround. It implements throughout XLR and RCA with it to an input connector and supports in every production scene.

"Meter range"

The LED display range is -40, -21, -18, -15, -12, -9, -6, -3, 0, +3, +6. The 0dB and -40dB point is adjustable internally. As for the LED color, -40 is green, and -3 to -21 is yellow, and 0 to +8 is red. In addition, only as for XLR input, -50dB can set -40dB point.

"Reference level"

The reference level of the XLR input is +4dBu, and the RCA input is -10dBu. 14dB sensitivity is higher in the RCA input than XLR input, and it connects it with appropriate cable, and it is not because it may occur with an error for low-level display by a noise if there is not it.

"Input and output"

It provides for the input by XLR balanced input and RCA unbalance input, and the throughout is implemented by each, too. The RCA is mixed with XLR internally, and it is not necessary for the cable to replace it when a signal is not input simultaneously.

"Others"



Please refer about rack mount-style, the change of the meter range.




SPECIFICATIONS

- 🍏 **XLR INPUTS:** BALANCED, 24kΩ, REF LEVEL=+4dBu
- 🍏 **RCA INPUTS:** UNBALANCED, 10kΩ, REF LEVEL=-10dBu
- 🍏 **FREQUENCY RESPONSE:** 20Hz~20kHz ±1dB
- 🍏 **DISPLAY:** 11 point
- 🍏 **MAINS:** 100VAC 10W MAX
- 🍏 **MAIN UNIT:** 434Wx88Hx153D 3.5kg

Program meter	VC740	¥298,000
	accessory : AC cable	

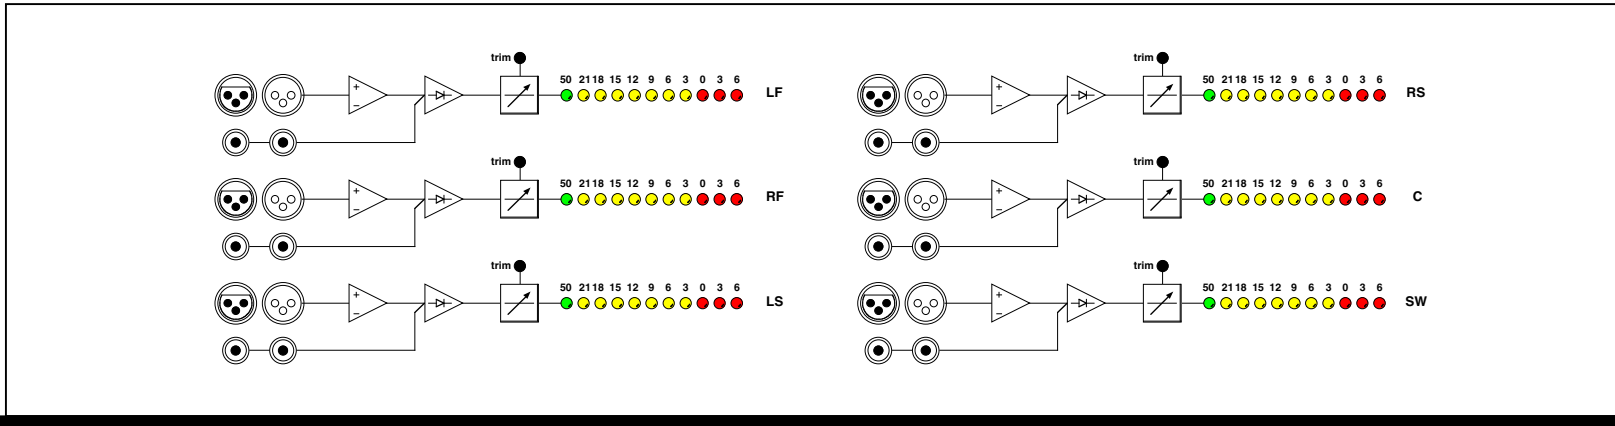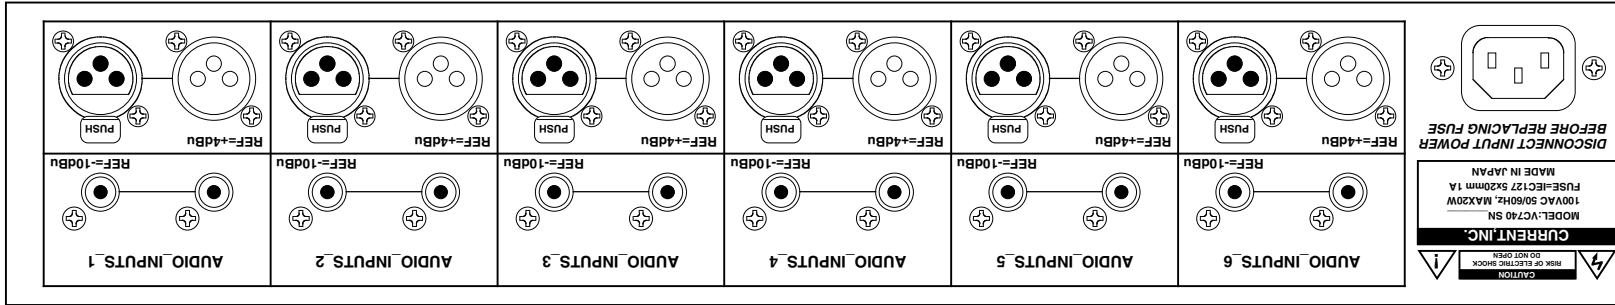

152.6

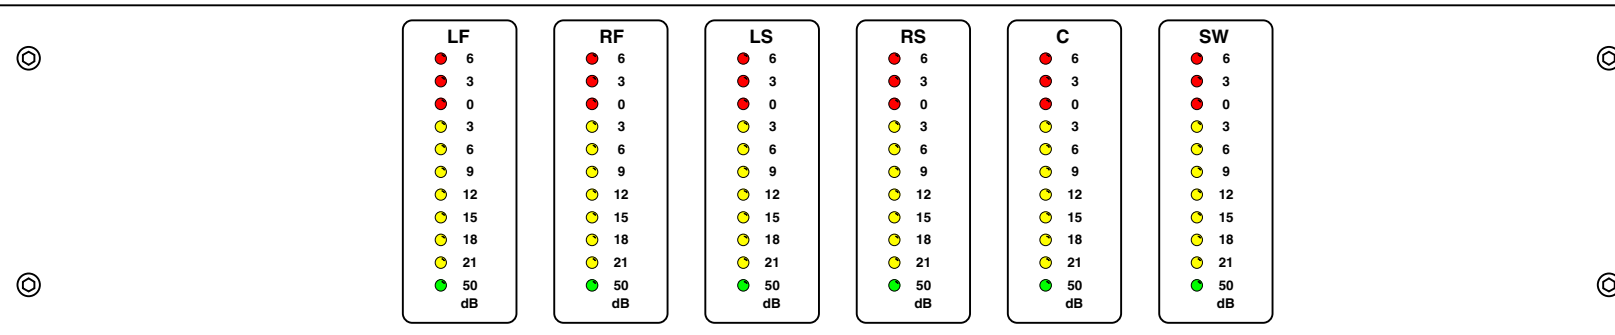

88.0

434.0

CURRENT, INC.	PROGRAM METER VC740	Nov.2010
H.ICHIHASHI	PANEL DIAGRAM	APR 98
		VC740-D