


CURRENT PRODUCTS model:CSP333

STEREO AUDIO ROUTER

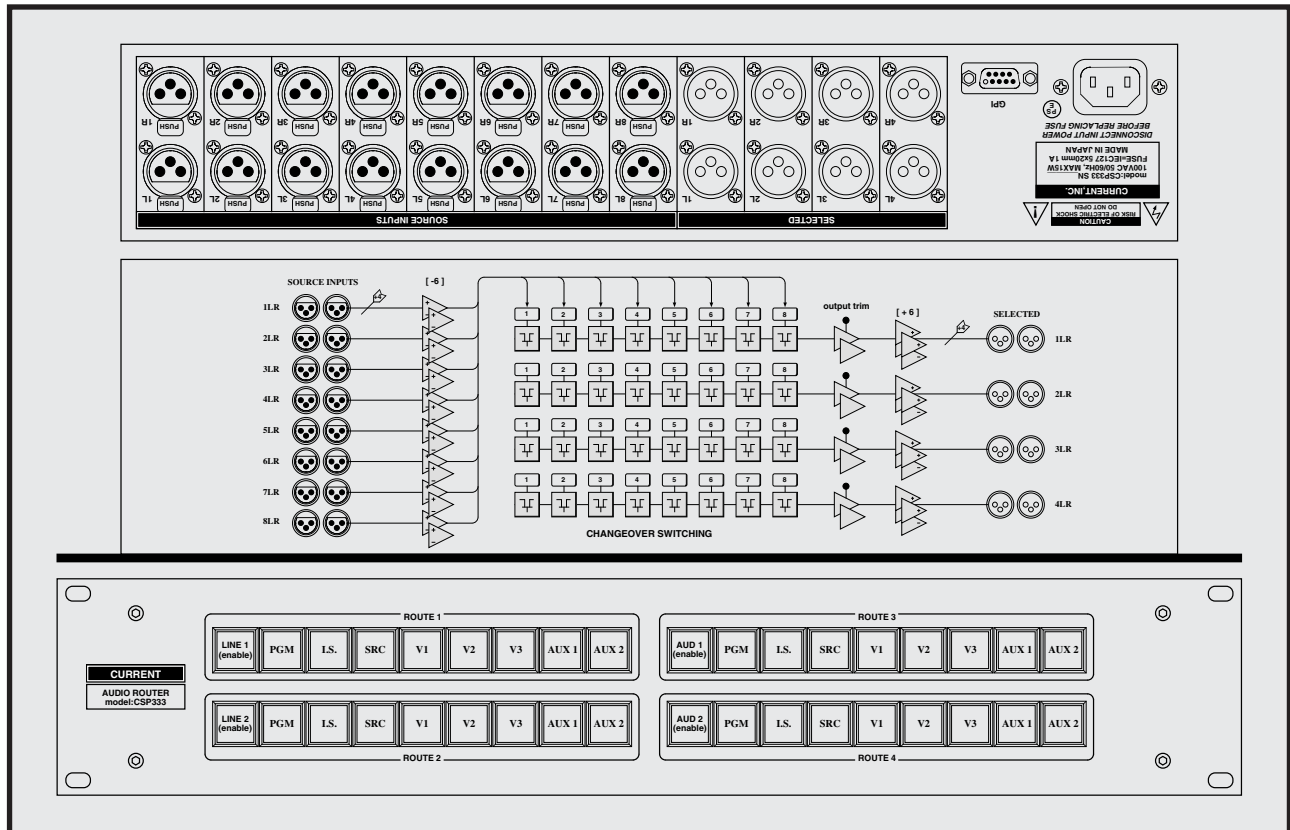

A stereo audio system router of 8x4
 A low noise, high sound quality
 A design with high visibility
 It is most suitable as a program selector
 19 inches 2U size

CSP333 eight stereo input is, the output is a four-channel stereo audio router.
It can choose either of the input of 8 systems by each output.
By a panel design with high visibility, it can do setting and the confirmation that are in a state quickly.
It is most suitable for choice and the routing use of the audio system source.

"INPUT"

It can input the stereo source of 8 systems.
 Rearrangement of the system can easily be XLR type connectors are.

"OUTPUT"

By the stereo output of 4 systems, the source which it chose with front panel is output.
 Rearrangement of the system can easily be XLR type connectors are.

"Front panel"

It operates a select button while pressing the 'Enable' button for prevention of operational error.
 Source 1 is chosen at the time of the power-up by all routes.
 In addition, it can easily change the name of the button by replacing films.

"Others"

Please contact us so we can manufacture different specification matrix switcher, and routers.





SPECIFICATIONS

- ♣SOURCE INPUTS: STEREO 8
- ♣INPUTS IMPEDANCE: BALANCED, 11kΩ
- ♣INPUTS LEVEL: REF=+4dBu, MAX=+24dBu
- ♣INPUT CONNECTOR: XLR3-F
- ♣MATRIX OUTPUTS: STEREO 4
- ♣OUTPUTS IMPEDANCE: BALANCED 50Ω
- ♣OUTPUTS LEVEL: REF=+4dBu, MAX=+24dBu
- ♣OUTPUT CONNECTOR: XLR3-M
- ♣FREQUENCY RESPONSE: 20Hz~20kHz ±0.1dB
- ♣THD: < 0.01% at 1kHz REFERENCE LEVEL
- ♣MAINS: 100VAC 50/60Hz, 12W MAX
- ♣DIMENSIONS: 482Wx88Hx303D,5kg


Stereo Audio Router	CCSP333	¥640,000
accessory : AC cable		

The specifications are subject to change without notice.
 2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

MONITOR SYSTEM
 HEADPHONES AMP
 CUE SYSTEM
 COMMUNICATION
 TB. COUGH SYSTEM
 MATRIX AMP
 AUDIO ROUTER
 AUDIO VIDEO
 SWITCHER
 SYSTEM SWITCHER
 EMERGENCY
 AUDIO VIDEO
 DISTRIBUTOR
 METER SYSTEM
 ANALOG, DIGITAL
 PREAMP MIXER
 LEVEL UNIT
 DIGITAL AUDIO
 FADER UNIT
 AUTO FADER
 TALLY FADER
 CLOCK, TIMER
 EVENT SYSTEM
 SPECIAL PRODUCTS
 ETC.

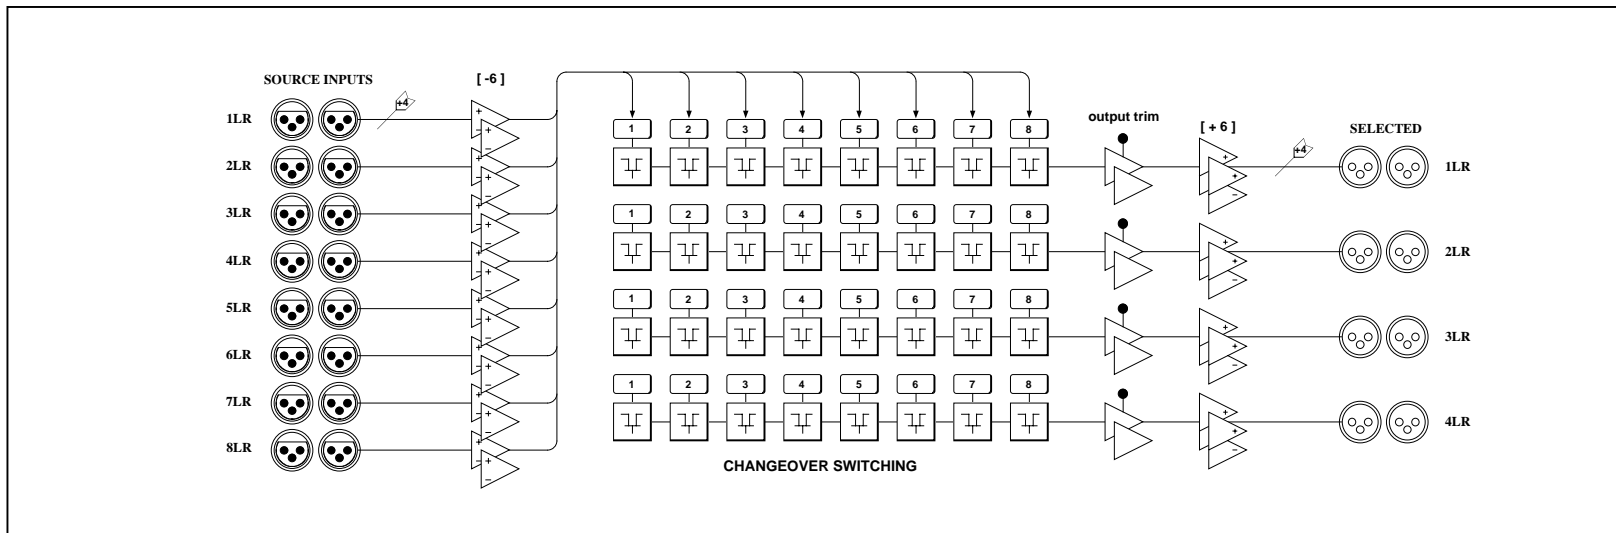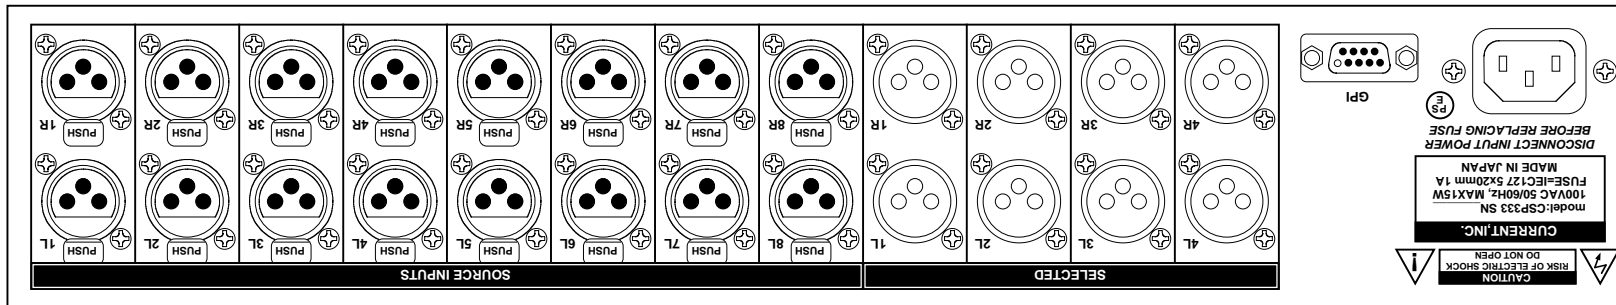

302.6

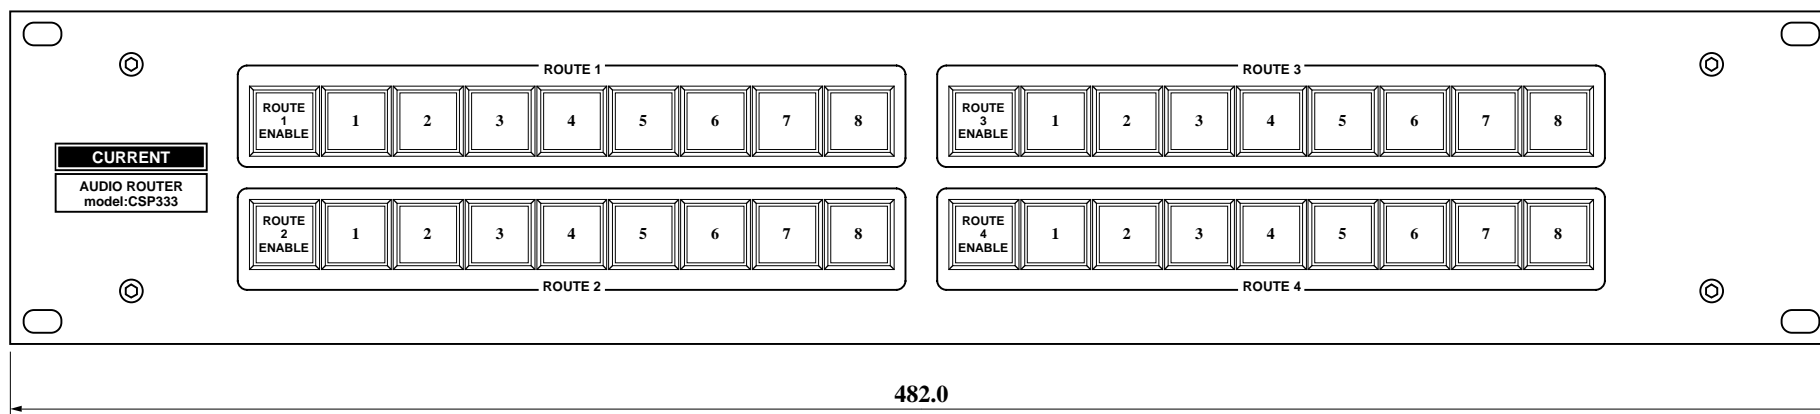

88.0

482.0

(c)CURRENT,INC.	CSP333 AUDIO ROUTER	Mar.2006
H.ICHHASHI	PANEL DIAGRAM	CSP333-D