


# CURRENT PRODUCTS model:CSP914

## DUAL ISOLATOR

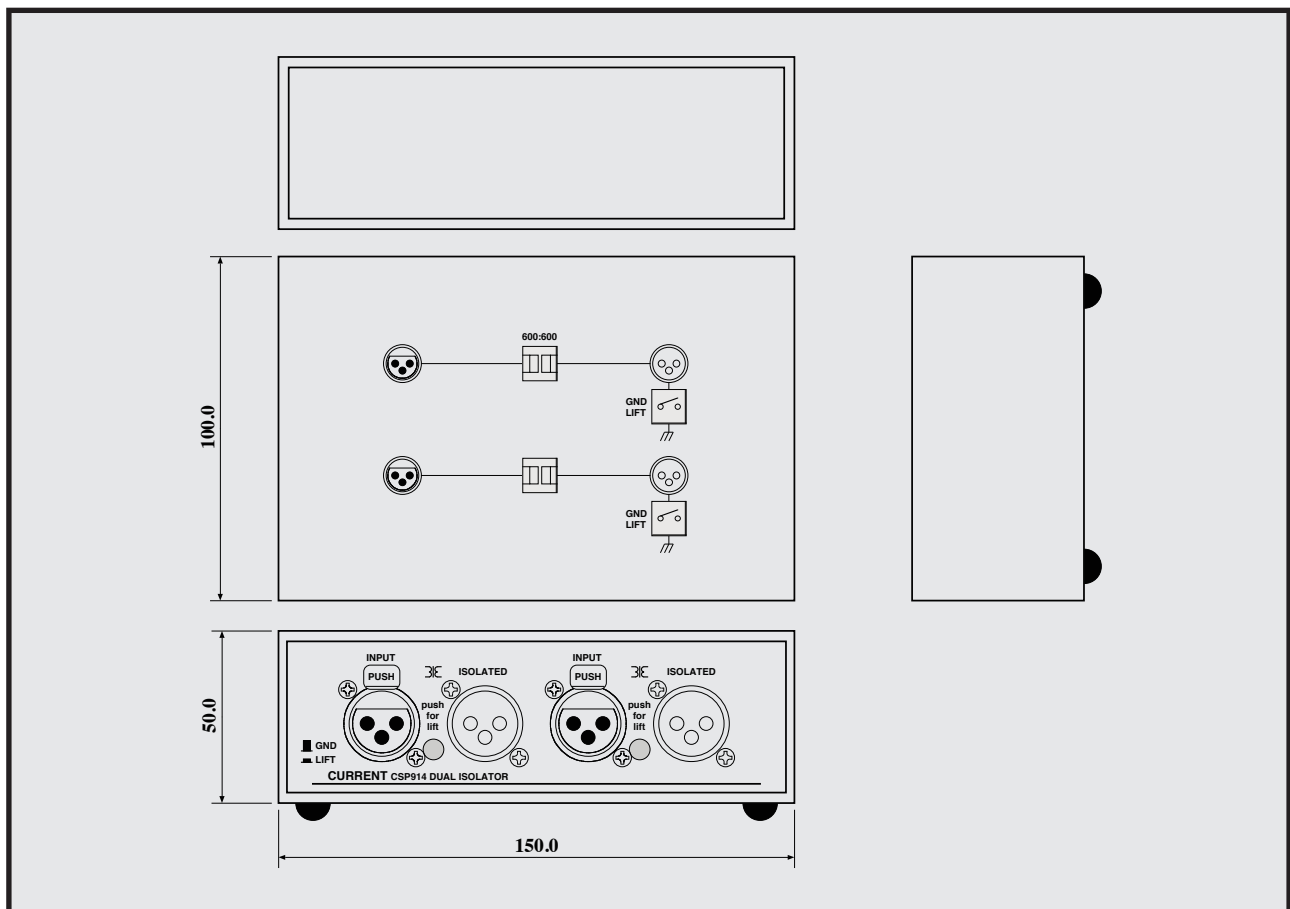

2ch isolator  
 Power supply unnecessary  
 Jensen made transformer use  
 Compact

"Others"  
 Please refer about the manufacturing in the multi channel.

**CSP914 is an isolator of 1:1 using the Jensen made transformer. It solves the GND noise by the system using DAW. It is effective for the case that a problem occurs in unbalanced connection though it is balanced output and a case not to be able to extend a cable to by high impedance. Additionally, it is useful for sound quality because it can cut the high frequency noise. The small box shape allows a studio, the use at every place including the broadcast scene.**



"Audio input and output"  
 A connector is balanced XLR connector, and the input and output does not choose the interconnect equipment. The input and output impedance is 600:600.



"GND"  
 It can completely isolate with a lift switch separating pin1 of the output from GND and can completely shut out the noise caused by the GND.

"Caution of operation"  
 It is the passive equipment using the transformer, and, please note for the external inductive noises such as power supply transformers.

### SPECIFICATIONS

- 🍏 INPUTS: 2ch, 600Ω
- 🍏 INPUT CONNECTORS: XLR3-F
- 🍏 OUTPUTS: 2ch, 600Ω
- 🍏 OUTPUT CONNECTORS: XLR3-M
- 🍏 REFERENCE LEVEL: +4dBu, max=+24dBu
- 🍏 FREQ.RESPONSE: 20 to 20kHz ±0.1dB
- 🍏 THD: <0.01% at Ref.Level
- 🍏 DIMENSIONS: 150Wx50Hx100D 1kg

Dual isolator	CSP914	¥48,000
accessory : None		

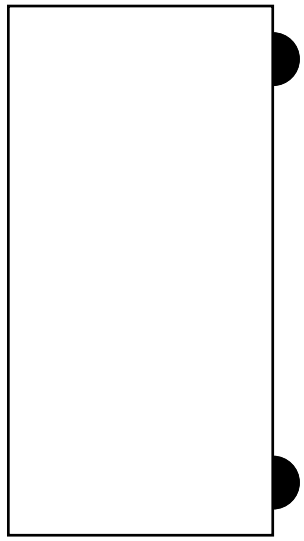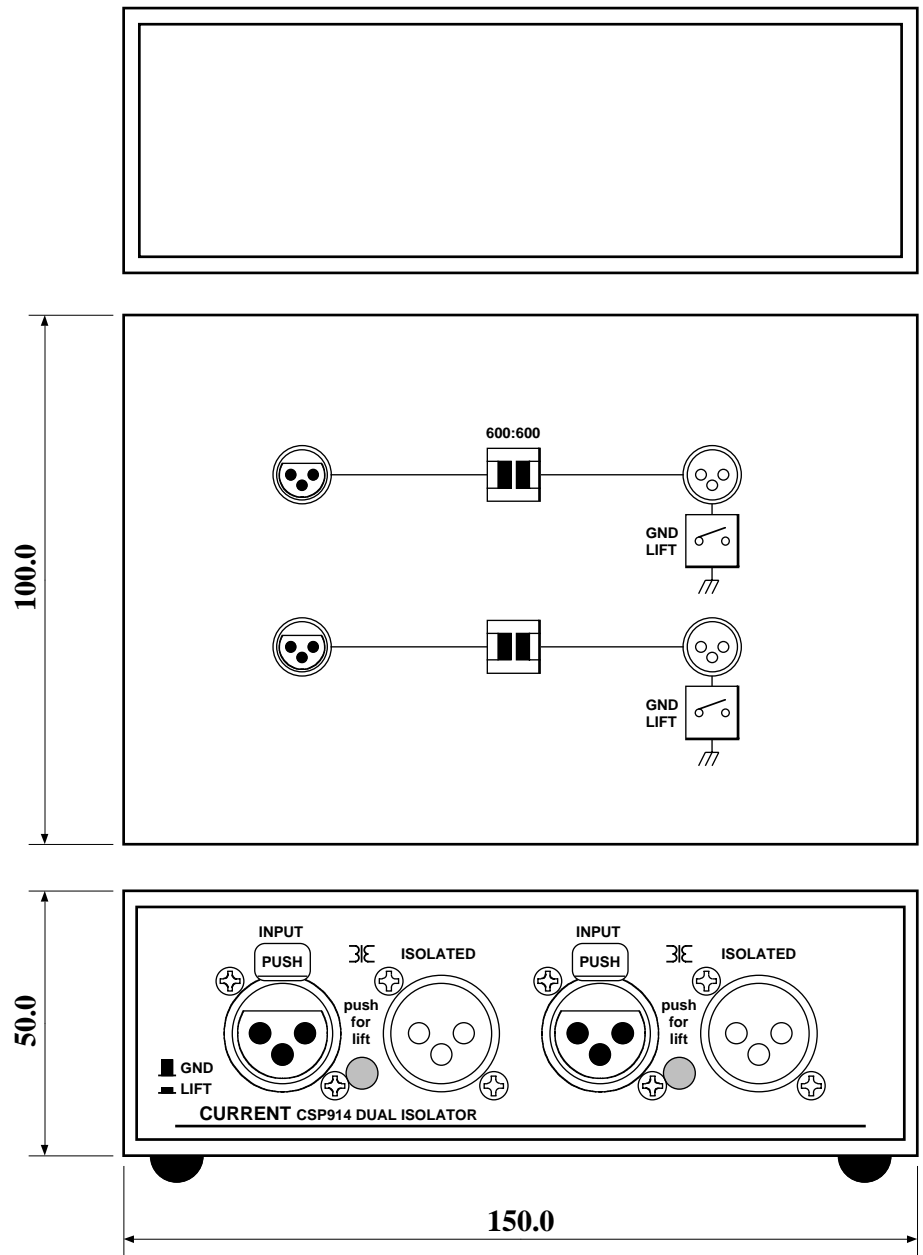

(c)CURRENT,INC.	CSP914 DUAL ISOLATOR	Sep.2006
H.ICHIHASHI	PANEL DIAGRAM	CSP914-D