

# CURRENT PRODUCTS model:MP470

## LINE CHECKER



Easy line check  
Microphone, line support  
Built-in speaker  
48V phantom  
XLR, PHONE, RCA support  
It works with 2 size AA batteries

*MP470 is the line checker who can easily check whether a sound comes to a cable properly. It can confirm dynamic microphone, condenser microphone requiring of the phantom power, line to +4 to -20, these with a speaker whether it only places a connector, and a signal comes.*

#### "Connector"

The input connector can support in XLR, 1/4" phone, a thing providing with 3 types of the RCA in various equipment and fields. In addition, it cannot use 3 connectors simultaneously because it is connected in parallel internally.

#### "Microphone power supply"

48V phantom power for condenser microphones is supplied when it presses the lateral button.

#### "Monitor"

It can confirm the input signal with a built-in speaker and is convenient for work of the hands free. In addition, a microphone and the gain of the line are variable consecutively.


#### "Power supply"

It works with 2 size AA batteries more than 24 hours and is safe for the use the outdoors.



#### SPECIFICATIONS

- INPUTS: BALANCED, 600Ω Transformer
- INPUTS CONNECTORS: XLR3-F, 1/4" PHONE, RCA
- MIC POWER: +48V 2mA
- MONITOR GAIN: 44dB
- POWER: DC3V, UM-3x2
- DIMENSIONS: 90Wx35Hx135D 0.3kg

Line checker	MP470	¥36,000
accessory : battery		

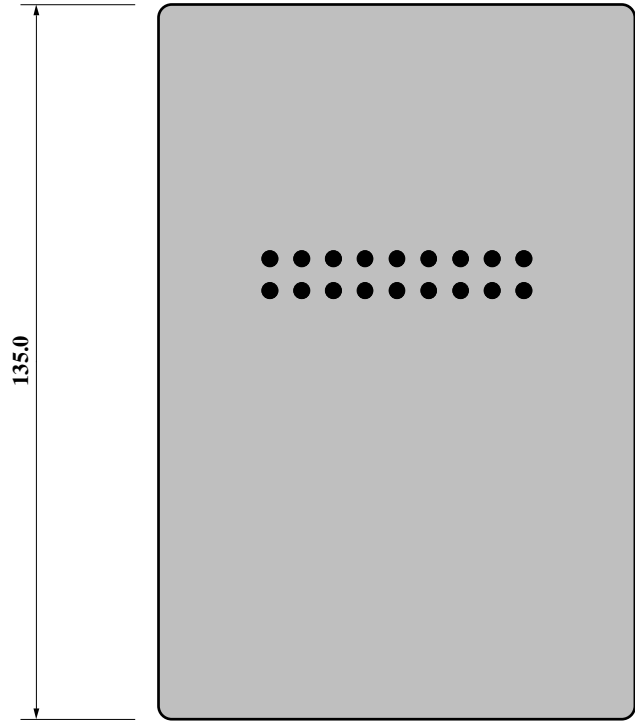

push for 48V

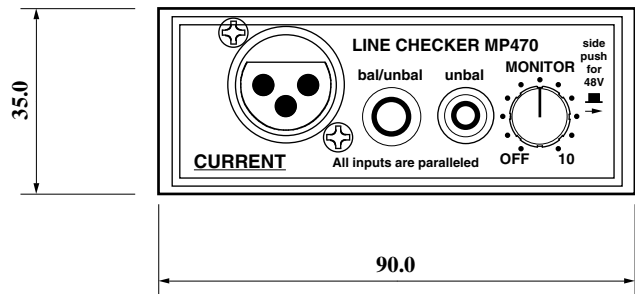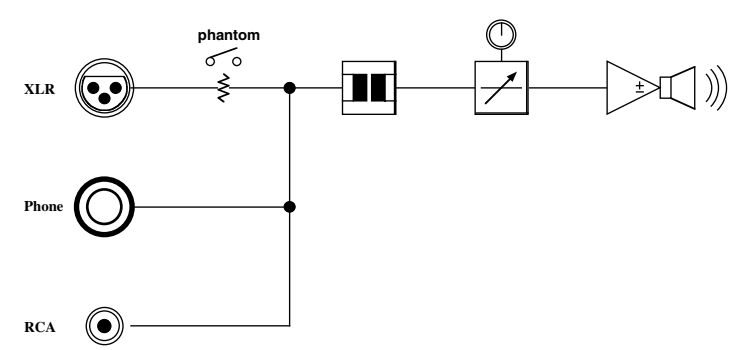

(c)CURRENT,INC.	<b>LINE CHECKER MP470</b>	May.2007
H.ICHIHASHI	<b>PANEL DIAGRAM</b>	May.2001
		MP470-D