


# CURRENT PRODUCTS model:CSP153A/R

## PROGRAM METER

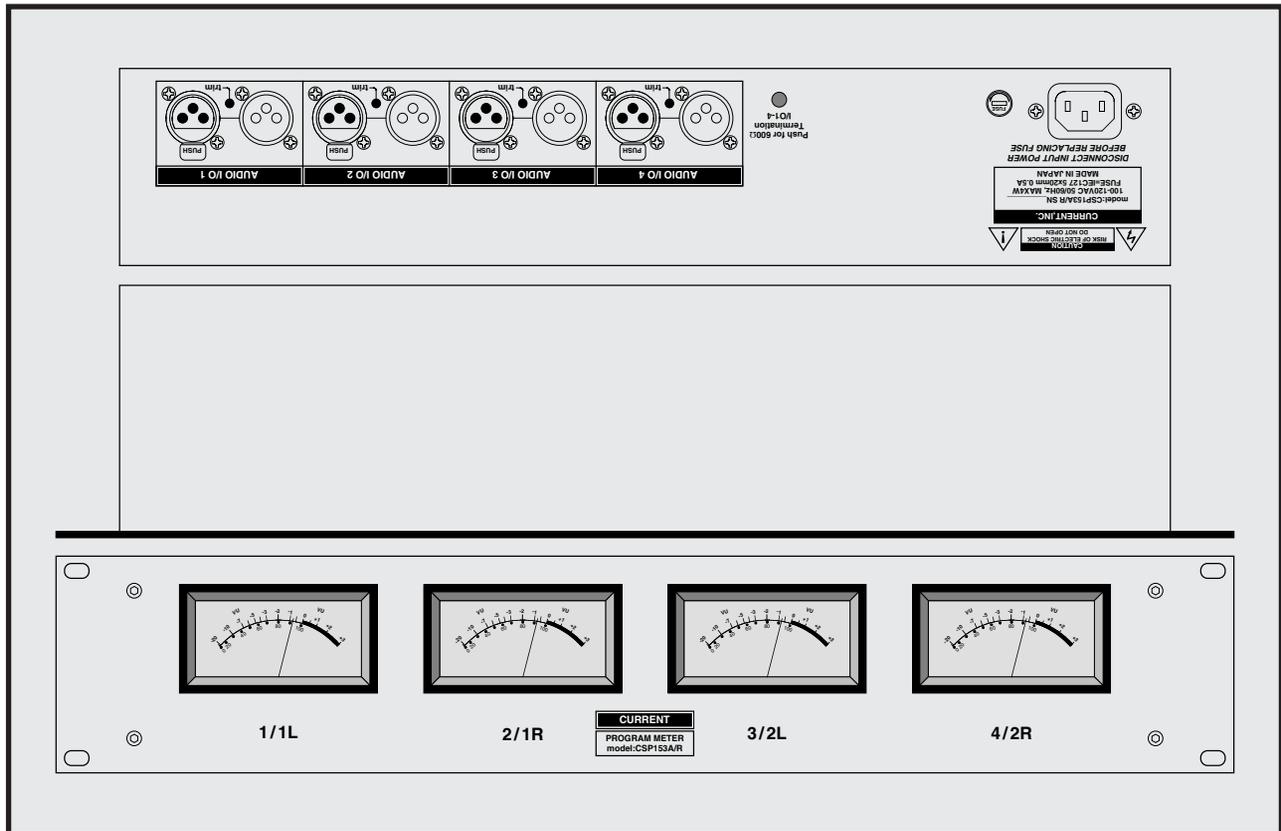

4ch VU meter  
 Highest grade large size meter  
 Balanced XLR inputs and through outputs  
 -20dBu to +20dBu trim  
 600 Ω line compatible  
 Maintenance-free illumination  
 19 inches 2U size

**CSP153A/R is a program meter of 4ch specifications. It implements sifam made to a VU meter unit, and, as for this component, the adoption results with the large size console are a lot of and highly precise. Moreover, it is beautiful and maintenance-free bulb-colored LED is mounted for the illumination of each meter.**

### "Audio input and output"

Audio input and the through output of CSP153A/R are balanced XLR type connectors. In addition, it is compatible with the 600 Ω line with a termination switch of the rear panel.

### "Trim"

The reference level of the VU meter is a trim located beside each input connector of the rear panel, and adjustment is possible to -20dBu to +20dBu. In addition, the standard reference level is 0VU=+4dBu.

### "Others"

It is possible for the change to name of a reference level and the panel depending on specifications, but plate-making charges are necessary separately. It is possible for a reference level and the panel name to customize, and, in that case, plate-making charges are necessary separately.

Please specify CSP153A of the desktop or rack mount-type CSP153AR at the time of an order.



CSP153A

### SPECIFICATIONS



- 🍏 **INPUTS:** 4ch, 20kΩ, BALANCED
- 🍏 **INPUT CONNECTOR:** XLR3-F
- 🍏 **THRU OUTPUT CONNECTOR:** XLR3-M
- 🍏 **FREQUENCY RESPONSE:** 20~20kHz ±0.5dB
- 🍏 **REFERENCE:** +4dBu, adjustable -20~+20dBu
- 🍏 **METERS:** SIFAM R22AF/AL29WF Internal LED Lamp
- 🍏 **MAINS:** 100VAC 50/60Hz MAX=5W
- 🍏 **CSP153AR DIMENSIONS:** 482Wx88Hx153D, 5kg
- 🍏 **CSP153A DIMENSIONS:** 438Wx88Hx153D, 5kg

Rack mount	CSP153R	¥248,000
No mount angle	CSP153	¥248,000
Custom silk print		¥64,000


accessory : AC cable

The specifications are subject to change without notice.  
 2-26-11 AKATSUTSUMI, SETAGAYA-KU, TOKYO, 156-0044 JAPAN

MONITOR SYSTEM  
 HEADPHONES AMP  
 CUE SYSTEM  
 COMMUNICATION  
 TB. COUGH SYSTEM  
 MATRIX AMP  
 AUDIO ROUTER  
 AUDIO VIDEO  
 SWITCHER  
 SYSTEM SWITCHER  
 EMERGENCY  
 AUDIO VIDEO  
 DISTRIBUTOR  
 METER SYSTEM  
 ANALOG, DIGITAL  
 PREAMP MIXER  
 LEVEL UNIT  
 DIGITAL AUDIO  
 FADER UNIT  
 AUTO FADER  
 TALLY FADER  
 CLOCK, TIMER  
 EVENT SYSTEM  
 SPECIAL PRODUCTS  
 ETC.

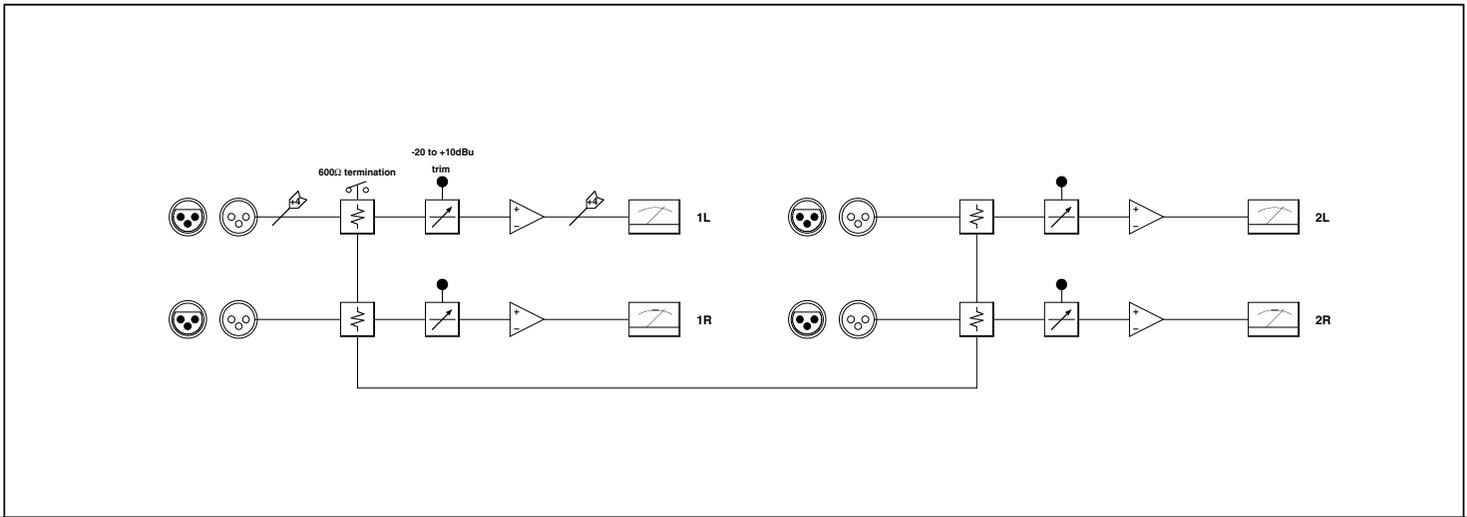
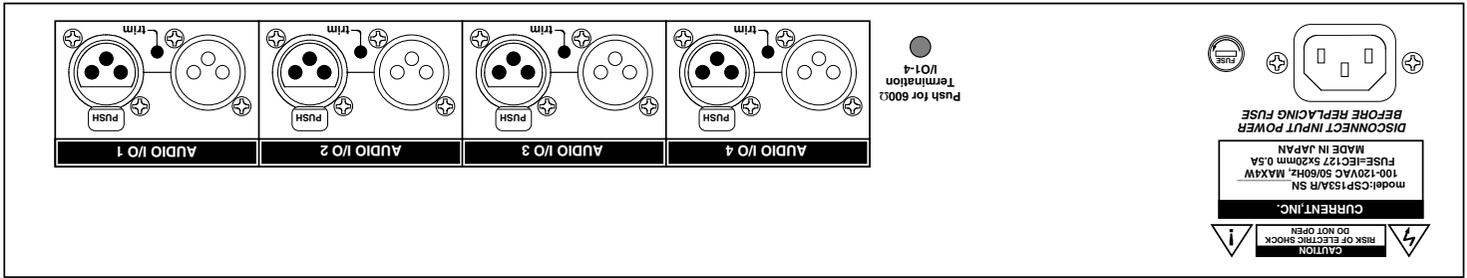


152.6

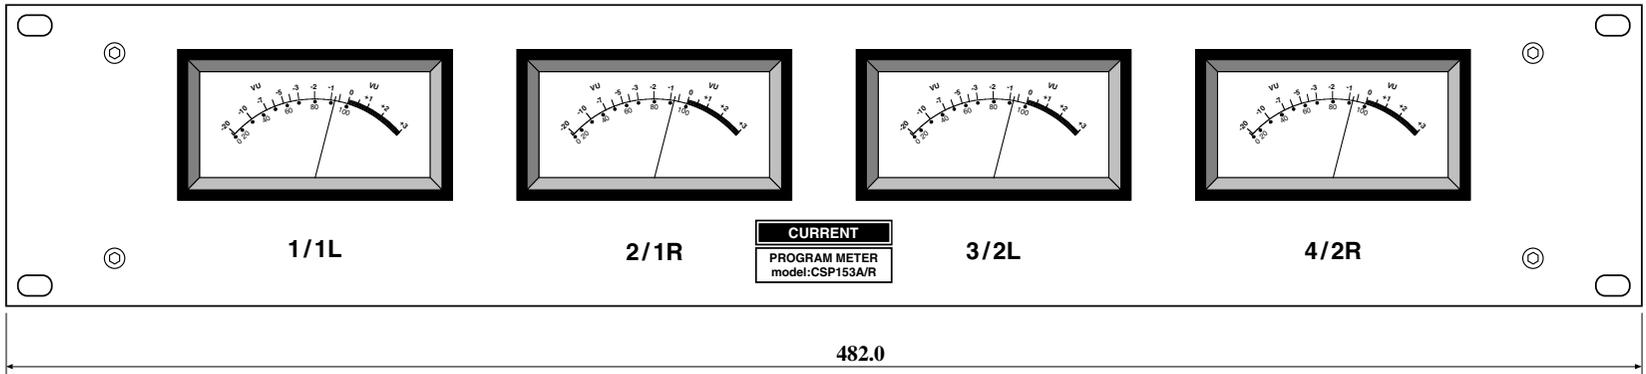


88.0

(c)CURRENT,INC.	PROGRAM METER CSP153AR	DEC.97
H.ICHIHASHI	PANEL DIAGRAM	CSP153AR-D

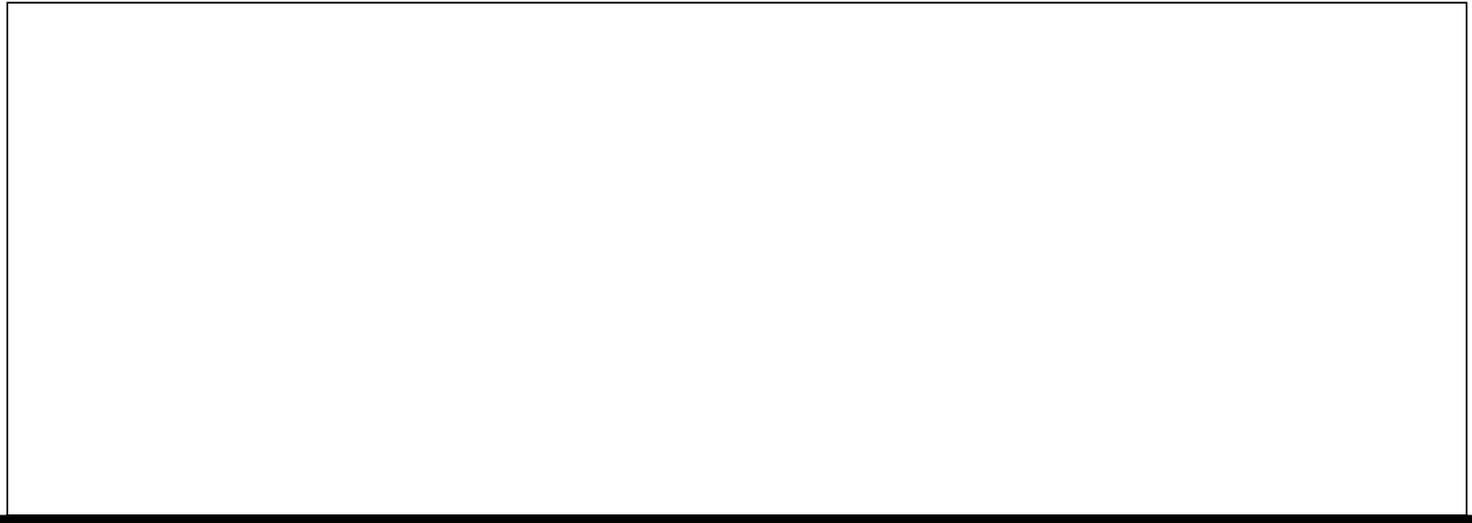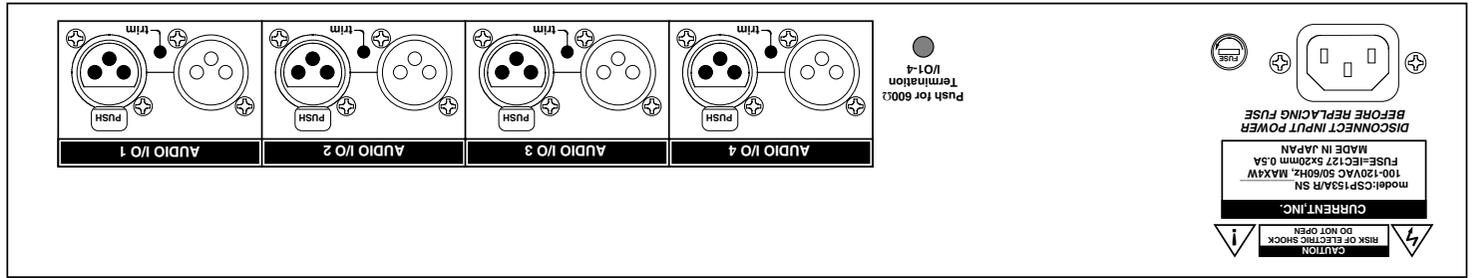

152.5

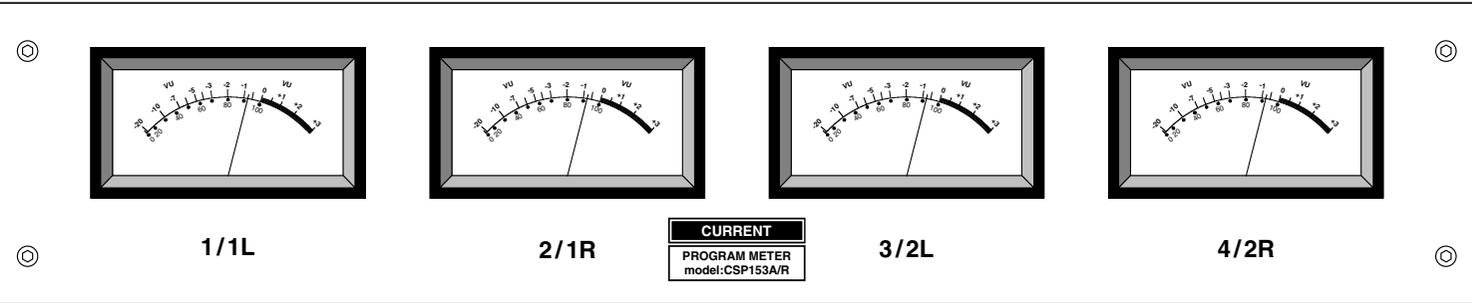

88.0

438.0

(c)CURRENT,INC.	PROGRAM METER CSP153A	SEP.2003
H.ICHIHASHI	PANEL DIAGRAM	DEC.97
		CSP153A-D